


Front Panel

STA-BRITE D

For Control of Sapstain and Mold
In Freshly Cut Lumber and Timbers

FOR INDUSTRIAL USE ONLY

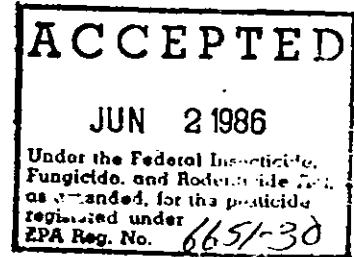

Read Entire Label Carefully and Use Only as Directed

Active Ingredient:

Chlorothalonil(tetrachloroisophthalonitrile) 40.4%

Inert Ingredients:

59.6%

Total 100%

KEEP OUT OF REACH OF CHILDREN

(12 pt)

DANGER

(18 pt)

See Side Panel for Additional Precautionary Statements

First Aid

In case of eye contact, flush eyes with water for 15 minutes, get medical attention immediately. In case of skin contact, wash exposed area of skin with soap and warm water. This product may produce temporary allergic side effects characterized by redness of eyes, mild bronchial irritation and redness or rash on exposed skin areas.

Note to physician: Person having allergic reaction responds to treatment with antihistamines or steroid creams and/or systemic steroids. In case of inhalation, remove person to fresh air and get medical attention immediately.

EPA Reg. No. 6651-30

EPA Est. No. 6651-MS-1

Contents: 2 gallons (7.57 liters)

Sonford Products Corporation
Jackson, MS

2664

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS

Danger, corrosive, causes severe eye damage. Skin sensitizer. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield, rubber gloves, long sleeve shirt and long pants when mixing, loading and applying this product. May be fatal if inhaled. Do not breathe vapors. Harmful if swallowed or absorbed through the skin.

ENVIRONMENTAL HAZARDS

Do not discharge into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product into sewer systems without previously notifying the sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the Environmental Protection Agency.

Do not store near food or feed stuffs. Store in cool place. Protect from excessive heat.

Key Points on Safety and Use

- * KEEP OUT OF REACH OF CHILDREN
- * Corrosive. Causes severe eye damage
- * Do Not Take Internally
- * Do Not Store Near Foodstuffs
- * This Product is Toxic to Fish
- * Furnish Protective Clothing and Goggles to Workers
- * Instruct Workers to Use Good Hygiene and Always Wash Hands Before Eating or Drinking

WARRANTY

Seller warrants that the material conforms to the chemical description on this label. The buyer assumes all risk contrary to the directions. Seller makes no other warranty expressed or implied.

2864

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

(12 pt)

Pesticide Disposal

Pesticide wastes are toxic. Improper disposal of excess pesticide, pesticide formulation or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Container Disposal

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

APPLY ONLY AS SPECIFIED ON THIS LABEL

General:

Note to User: Technical Chlorothalonil may produce temporary allergic side effects characterized by redness of the eyes, mild bronchial irritation and redness or rash on exposed skin areas. Persons having allergic reaction should contact a physician.

Sta-Brite D is a liquid formulation to be dispersed in water for control of sap stain and mold in freshly sawed lumber and timbers. The dispersion in water may be applied by dip or a coarse spray. Shake or mix the concentrate well before dispersing in the water.

Lumber Treatment:

For lumber approximately 2" (50 mm) or less in thickness, use 2.2 lbs. (1 kg) per 100 gallons (378 liters) of water. Dip or spray the lumber until all surfaces are thoroughly wet.

Timber Treatment:

For timbers or lumber thicker than 2" (50 mm), use 4.4 lbs. (2 kg) per 100 gallons (378 liters) of water. Measure the chemical and water accurately. Dip or spray until all surfaces are thoroughly wet.

Proper Handling of Treated Lumber and Timbers:

For best results, use fresh logs as free from infection as possible before converting into lumber. Treat the lumber as soon as possible (within 12 to 24 hours) after cutting. Place lumber and timbers on sticks, if possible for rapid air seasoning. Protect freshly treated lumber from excessive rainfall immediately after treatment.

Note #1: If possible, dipping is better than spraying for complete coverage of all surfaces. The dispersion will settle overnight in the dip vat, so mix well every morning with a hoe or paddle.

Note #2: Bulk piled lumber and timbers should always use the stronger mixture.