SMCP HEPTACHLOR EM-3

(DILUTE WITH WATER)

Per Cent Haptachlor EM-3 in finished formulation	Volume of Finished formulation (gal.)	Amount of Heptachlor EM-3 necessary
0.5%	72	1 gallon
	36	2 quarts
	5	9 ounces
	1 1	2 ounces

DIRECTIONS FOR HOUSEHOLD INSECT CONTROL (FOR USE IN AND AROUND THE HOME. APPLY AS COARSE WET SPRAY, LIMIT TO SPOT TREATMENTS)

Do not use in edible products area of food processing plants, barns or poultry houses.

INSECT	% Concentration	TREATMENT INFORMATION
Roaches (Waterbugs)	0.5%	Thoroughly spray infested cracks, hiding places and adja- cent exposed surfaces where they crawl.
Ants	0.5%	Spray trails and areas around door sills and window frames.
Silverfish Firebrats	0.5%	Spray baseboards, areas behind shelving, book cases and stor- age areas.
Mosquitoes Wasps	0.5%	Spray surfaces such as doors, around windows and areas fre- quented by these pests. Also, treat window frames, door sills, etc.

WARNING

May be fatal if swallowed. DO NOT use near heat or open flame. DO NOT use as space spray (Aerosol or Fogging). DO NOT breathe vapor or spray mist. Keep out of reach of children. DO NOT get on skin. In case of contact, wash immediately with soap and water. Store this product at temperatures above 50° F. DO NOT contaminate feed and foodstuffs.

DO NOT use in any a not specified on this label.


This product is toxic to fish and wildlife. Birds feeding on treated areas may be killed. Keep out of any body of water. DO NOT apply where runoff is likely to occur. DO NOT contaminate water by cleaning of equipment, or disposal of wastes.

DO NOT re-use empty container. Destroy by punching holes in it and bury with waste or burn. Keep away from smoke.

ANTIDOTE

INTERNAL — Emetic of 1 tablespoonfree water, water, Call a physician immediately.

EXTERNAL - In case of spillage on skin, wash promptly with soap and water.

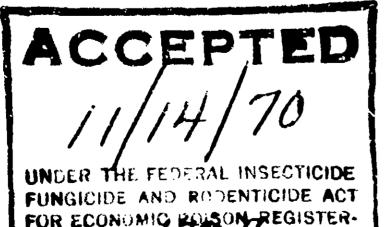

FUNGICIDE AND REDENTICIDE ACT FOR ECONOMIC ROUSON REGISTER-ED UNDER NOC REAL SUBJECT TO ATTACHED COMMENTS. watard in tumbler of



Conta FOR USE BY P

ACTIVE INGREDII Heptachlor* Related Corr Petroleum D INERT INGREDIEN

*Hep achlorotetral

SEE SIDE P



Add 3 gallon of Heptachlor EM-3 to 71 gallons of water (0.5% emulsion). Apply the 0.5% emulsion as follows:

1-SLAB TYPE CONSTRUCTION

- entrance platforms.
- partition walls.

2-BUILDINGS WITH CRAWL SPACES



Heptachloroietrahydro-4, 7-methanoindene

KEEP OUT OF REACH OF CHILDREN. WARNING:

SEE SIDE PANELS FOR ANTIDOTE AND ADDITIONAL PRECAUTIONS U.S.D.A. Registration Number 6720-7



I EKTHIE

a-Apply 1 gallon per 10 square feet as an overall pre-construction treatment under the slab and along attached porches or

b-Apply 2 gallons per 5 lineal feet to critical areas under the slab as pre-construction treatment, such as along the inside of the foundation walls and around utility entrances and interior

c-Apply 2 gallons per 5 lineal feet along outside of the foundation using a trench to the depth of the foundation. Do not go deeper than the top of the footing.

a-Apply 2 gallons per 5 lineal feet in a trench along the outside of foundation walls, including entrance platforms and porches where the foundation is not more than 15-18 inches deep. If over 15-18 inches deep but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.

b-Apply 2 gallons per 5 lineal feet as a trenching application to critical areas under the house, such as along the inside of foundation walls and around piers and utility entrances. If trench is deeper than 15-18 inches but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.

c-Apply 1 gallon per 10 square feet of soil surface as a pre-construction treatment where the attached porches, entrance platforms, utility entrances have covering slab on fill of ground.

d-Apply 1 gallon per 5 lineal feet of wall to voids in hollow masonry units of the foundation

TERMITE CONTROL

Add 1 gallon of Heptachlor EM-3 to 71 gallons of water (0.5% emulsion). Apply the 0.5% emulsion as follows:

1-SLAB TYPE CONSTRUCTION

- a-Apply 1 gallon per 10 square feet as an overall pre-construction treatment under the slab and along attached porches or entrance platforms.
- b-Apply 2 gallons per 5 lineal feet to critical areas under the slab as pre-construction treatment, such as along the inside of the foundation walls and around utility entrances and interior partition walls.
- c-Apply 2 gallons per 5 lineal feet along outside of the foundation using a trench to the depth of the foundation. Do not go deeper than the top of the footing.


2-BUILDINGS WITH CRAWL SPACES

- a-Apply 2 gallons per 5 lineal feet in a trench along the outside of foundation walls, including entrance platforms and porches where the foundation is not more than 15-18 inches deep. If over 15-10 inches deep but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.
- b-Apply 2 gallons per 5 lineal feet as a trenching application to critical areas under the house, such as along the inside of foundation walls and around piers and utility entrances. If trench is deeper than 15-18 inches but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.
- c-Apply 1 gallon per 10 square feet of soil surface as a pre-construction treatment where the attached porches, entrance platforms, utility entrances have covering slab on fill of ground.
- d-Apply 1 gallon per 5 lineal feet of wall to voids in hollow masonry units of the foundation

3-BUILDINGS WITH BASEMENTS

- footing.

NOTICE: Seller's guaranty shall be limited to the terms, of the label and subject thereto. The buyer assumes any risk to persons or property arising out of use or handling, and accepts the product on these conditions.



	32.1%
	12.5%
	50.4%
·	5.0%
	00.0%

ILDREN.

UTIONS

PANY, Inc.

a-Apply 1 gallon per 10 square feet as an overall pre-construction treatment under the basement flooring, attached porches, entrance platforms, utility entrances and similar situations where slab fill is at ground level.

b-Apply 2 gallons per 5 lineal feet in a trench along the outside of foundation walls, including entrance platforms and porches where the foundation is not more than 15-18 inches deep. If over 15-18 inches deep but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.

c-Apply 2 gallons per 5 lineal feet as a trenching application to critical areas under the house, such as along the inside of foundation walls, porches, entrances and piers. If then his deeper than 15-18 inches but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the

d-Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 lineal feet of wall.

1 1 1

1.5

Premises treated with 0.5% heptachlor will give residual control for a minimum of five years.

NOTE: For buildings with deep footing, dig trench 30 inches deep. Do not dig trench below level of footing. 1114 L

