

To meet FHA termite proofing requirements, consult the latest editions of the Housing and Urban Development (HUD) Minimum Property Standards.

Add 1 gallon of SMCP 73% CHLORDANE emulsifiable to 95 gallons of water for a 1% emulsion. Apply the 1% emulsion as follows: When application is by rodding, rods should be inserted one foot apart to the base of the footings. Applications should be made by pressure applied through the tube.

CONCRETE SLAB-ON-GROUND CONSTRUCTION:

1. Apply an over-all treatment under entire surface of floor slab. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material, apply at the rate of 1 1/2 gallons per 10 square feet.
2. Under slab-on-ground porch floors and entrance platforms, apply an over-all treatment at the rate of 1 gallon per 10 square feet.
3. Along both sides of foundation walls, along interior foundation walls, and around plumbing, rod or dig a narrow trench to a depth of 1 foot, but not below the top of the footing. Along outside foundation walls, trench should be no wider than six inches. Apply at the rate of 2 gallons per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.
4. Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

BUILDINGS WITH CRAWL SPACES:


1. Rod or dig a narrow trench to the top of the footing along the inside of the foundation walls, around piers, sewers, pipes and conduits. Apply 2 gallons of solution per 5 linear feet. When trenching, the chemical should be mixed with the soil as it is being replaced in the trench.
2. Rod or dig a narrow trench to the top of the footing along the outside of the foundation wall. If a trench is dug, it should be no wider than six inches. Apply 2 gallons of solution per 5 linear feet of trench per each foot of depth. Rodding or trenching 3 feet deep would require 6 gallons per 5 linear feet. When trenching, the chemical should be mixed with the soil as it is being replaced in the trench.

3. Under attached porches, entrance platforms, utility entrances and similar situations where slab of fill is at the same grade level, apply 1 gallon per 10 square feet of soil surface.
4. Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

BUILDINGS WITH BASEMENTS:

1. Apply an over-all treatment under the basement floorings, as well as under attached porches, entrance platforms, utility entrances and similar situations where slab fill is at the grade level. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is of washed gravel, cinders or similar coarse material, increase the dosage by at least one-half. Where crawl spaces exist, treat as described in part 2 below.
2. Rod or dig a narrow trench to the top of the footing along the inside of the foundation walls, around piers, sewer pipes and conduits. Apply 2 gallons of solution per 5 linear feet. When trenching, the chemical should be mixed with the soil as it is being replaced in the trench.
3. Along the outside of foundation walls, rod or dig a narrow trench, such trench to be dug no deeper than the top of the footings and to be no wider than six inches. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a minimum depth required alongside foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to a 30 inch depth, make a narrow trench and rod to footing, spacing the holes about 1 foot apart.
4. Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

NET CONTENTS

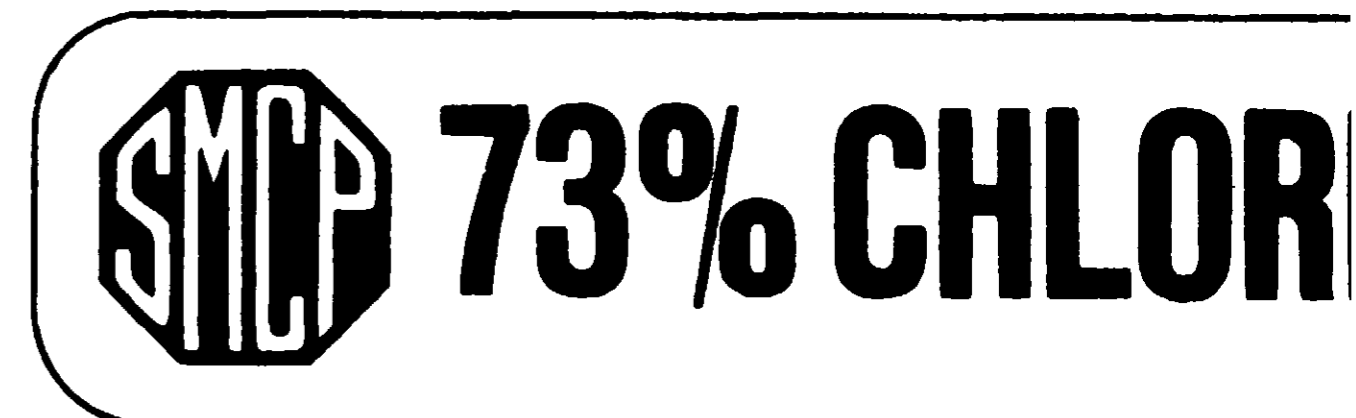

An Emulsified Concentrate Containing 8 lb. of Chlordane per Gallon FOR USE BY PROFESSIONAL TERMITE CONTROL

ACTIVE INGREDIENTS:	
Technical Chlordane*
Aromatic Petroleum Derivative Solvent
INERT INGREDIENTS	
TOTAL	

*Equivalent to 43.8% Octachloro-4, 7-methanotetrahydroindane and 29.8% DDT

WARNING!
KEEP OUT OF REACH OF CHILDREN
See side panel for other warnings

E.P.A. Reg. No. 6720-138

MANUFACTURED BY
Southern Mill Chemical
PRODUCTS COMPANY
TAMPA, FLORIDA 33601

per attached porches, entrance platforms, utility entrances and similar situations where slab of fill is at the same grade level, apply 1 gallon per 10 square feet of soil surface.

at all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

FOUNDATIONS WITH BASEMENTS:

Apply an over-all treatment under the basement floorings, as well as under attached porches, entrance platforms, utility entrances and similar situations where slab fill is at the grade level. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is washed gravel, cinders or similar coarse material, increase the dosage by at least one-half. Where crawl spaces exist, treat as described in part 2 below.

For each pier or dig a narrow trench to the top of the footing along the inside of the foundation walls, around piers, sewer pipes and conduits. Apply 2 gallons of solution per 5 linear feet. When trenching, the chemical should be mixed with the soil as it is being replaced in the trench.

Along the outside of foundation walls, rod or dig a narrow trench, each trench to be dug no deeper than the top of the footings and be no wider than six inches. If the trench is less than 15 inches depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a minimum depth required alongside foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to a 30 inch depth, make a narrow trench and rod to footing, spacing the holes out 1 foot apart.

at all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

NET CONTENTS



**An Emulsified Concentrate Containing
8 lb. of Chlordane per Gallon
FOR USE BY PROFESSIONAL TERMITE CONTROL OPERATORS**

ACTIVE INGREDIENTS:	
Technical Chlordane*	73.0%
Aromatic Petroleum Derivative Solvent	19.7%
INERT INGREDIENTS	7.3%
TOTAL	100.0%

*Equivalent to 43.8% Octachloro-4, 7-methanotetrahydroindane and 29.2% related compounds.

WARNING:
KEEP OUT OF REACH OF CHILDREN
See side panel for other warnings

E.P.A. Reg. No. 6720-138

E.P.A. Est. No. 6720-FI-1

MANUFACTURED BY
Southern Mill Creek
PRODUCTS COMPANY, INC.
TAMPA, FLORIDA 33601

PRECONSTRUCTION TREATMENT:

If soil is treated and the concrete slab is not poured shortly on the same day, a polyethylene sheeting or other waterproof should be placed over the treated soil. However, this procedure is not required where foundation cinder blocks or bricks surrounding the area have already been installed.

Premises treated with SMCP 73% CHLORDANE will give termite control for a minimum of five years.

FIRE ANT CONTROL

For the control of fire ants on home lawns, golf courses, ornamental turf, cemeteries, recreation areas and other non-cultivated areas make mound application only. Prepare a 0.5% emulsion according to the dilution guide below. Add the required amount of SMCP 73% CHLORDANE to sufficient water to bring the emulsion up to the desired volume.

Thoroughly saturate mounds using as much as 5 gallons of emulsion for large colonies.

DILUTION GUIDE FOR SMCP 73% CHLORDANE

Volume of 0.5% Emulsion Desired	Amount of 73% Chlordane
5 gallons	
10 gallons	
50 gallons	
100 gallons	

Do not contaminate feed or food crops. Treated areas should be examined three weeks after application and surviving termites retreated.

PRECONSTRUCTION TREATMENT:

If soil is treated and the concrete slab is not poured shortly thereafter on the same day, a polyethylene sheeting or other waterproof material should be placed over the treated soil. However, this procedure is not required where foundation cinder blocks or bricks surrounding treated area have already been installed.

Premises treated with SMCP 73% CHLORDANE will give residual control for a minimum of five years.

FIRE ANT CONTROL

For the control of fire ants on home lawns, golf courses, parks, ornamental turf, cemeteries, recreation areas and other non-cropland areas make mound application only. Prepare a 0.5% emulsion in water according to the dilution guide below. Add the required amount of SMCP 73% CHLORDANE to sufficient water to bring the finished emulsion up to the desired volume.

Thoroughly saturate mounds using as much as 5 gallons of 0.5% emulsion for large colonies.

DILUTION GUIDE FOR SMCP 73% CHLORDANE

Volume of 0.5% Emulsion Desired	Amount of SMCP 73% Chlordane Required
5 gallons	4 ounces
10 gallons	7 ounces
50 gallons	1 quart
100 gallons	2 quarts

Do not contaminate feed or food crops. Treated areas should be examined three weeks after application and surviving colonies retreated.

ACCEPTED

DEC 01 1976

Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 6720-138

WARNING

May be fatal if swallowed. Contact with eyes may cause toxic symptoms. Avoid breathing vapors or spray mist. In case of contact with skin, wash with soap and water. Avoid contamination of feed and food-stuffs. Keep out of reach of children.

This product is toxic to fish, birds, and other wildlife. Keep out of any body of water. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

ANTIDOTE

EXTERNAL: In case of spillage on skin, wash promptly with soap and water.

INTERNAL: Emetic of 1 tablespoonful of mustard in tumbler of water. Call a physician.

CONTAINER DISPOSAL: Rinse equipment and container and dispose of waste by burying in non-crop lands away from water supplies. Containers should be disposed of by puncturing holes in them and burying with wastes, or by burning. Keep out of smoke.

NOTICE: Seller's guaranty shall be limited to the terms of the label and subject thereto. The buyer assumes any risk to persons or property arising out of use or handling and accepts the product on these conditions.