

DIRECTIONS

SUBTERRANEAN TERMITES

Use Heptachlor Emulsifiable in a 0.5% water emulsion: Add one gallon of Heptachlor Emulsifiable to 36 gallons of water. Apply the 0.5% emulsion as follows.

PRECONSTRUCTION TREATMENT

SLAB-ON-GROUND CONSTRUCTION:

- (1) Apply an over-all treatment under entire surface of floor slab including porch floors and entrance platforms. Apply at rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material, apply at rate of 1½ gallons per 10 square feet.
- (2) Apply to critical areas to a depth of 1 foot but not below the top of the footing, along both sides of foundation wall, along interior foundation walls, and around plumbing at the rate of 4 gallons per 10 lineal feet. Chemical should be mixed with the soil as it is being replaced in the trench.
- (3) Apply to voids of unit masonry foundation walls at or near bottom of foundation at rate of 1 gallon per 5 lineal feet.
- (4) Under slab-on-ground porch floors and entrance platforms, apply overall treatment at rate of 1 gallon per 10 square feet.

BUILDINGS WITH CRAWL SPACES:

- (1) Apply 2 gallons per 5 linear feet to critical areas only under the house, such as along the outside of foundation walls, around piers, sewer pipes, conduits, etc. Trench according to directions in part (2) below.
- (2) Along the outside of foundation walls, dig a narrow trench, such trench to be dug no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a maximum depth required alongside those foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to 30" depth, make the trench 12 to 15" deep and rod to footing, spacing the holes about 1 foot apart.

- (3) Apply 1 gallon per 10 square feet of soil surface under attached porches, entrance platforms, utility entrances, and similar situations where slab or fill is at the grade level. Where crawl spaces exist, treat as described in part (1) above.

- (4) Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. It is best to apply the chemical near the footing.

BUILDINGS WITH BASEMENTS:

- (1) Apply 1 gallon per 10 square feet as an over-all treatment under the basement floorings, as well as under attached porches, entrance platforms, utility entrances, and similar situations where slab fill is at the grade level. In case of washed gravel, cinders, or some coarse material, increase the dosage by at least one-half. Where crawl spaces exist, treat as described in part (2) below.
- (2) Apply 2 gallons per 5 linear feet to critical areas only under the basement floorings, as well as porches and entrances having crawl spaces, such as along the inside of foundation walls, around sewer pipes, conduits, piers, etc. Trench according to directions in part (3) below.
- (3) Along the outside of foundation walls, dig a narrow trench, such trench to be dug no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 30" deep is a maximum depth required alongside foundations where the top of the footings is greater than 30" deep. In lieu of trenching to a 30" depth, make the trench 12" to 15" deep and rod to footing, spacing the holes about 1 foot apart.
- (4) Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. It is best to apply the chemical near the footing.

**NOT FOR STORAGE IN OR AROUND HOMES
DO NOT USE, POUR, SPILL OR STORE NEAR
HEAT OR OPEN FLAME.**

EPA REG. NO. 6723-8

NET CONTENTS . 1 GALLON


ACCEPTED
6723-8
AUG 29 1973
UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT

HE
EM
F
WARNI

ACTIVE INGRED
Heptachlor*
Related Compou
Xylene
Kerosene
INERT INGREDI

*Heptachlorotetra
equivalent to 1-1/

Red
920 McC

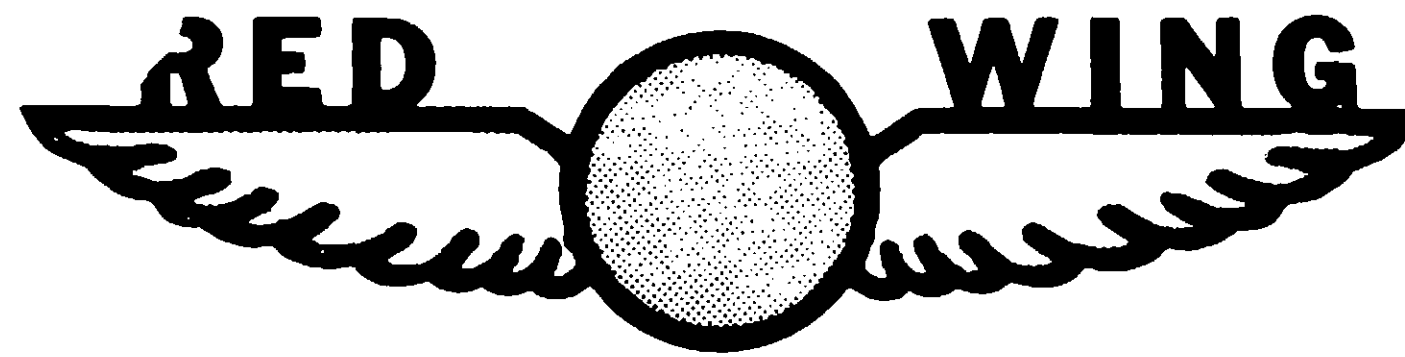

HEPTACHLOR 2 LB.

EMULSIFIABLE CONCENTRATE

FOR THE CONTROL OF TERMITES

WARNING: (SEE WARNINGS ON SIDE PANEL)
KEEP OUT OF REACH OF CHILDREN

ACTIVE INGREDIENTS:

Heptachlor*	18.63%
Related Compounds	6.55%
Xylene	35.24%
Kerosene	35.24%
INERT INGREDIENTS	4.34%
Total	100.00%

*Heptachlorotetrahydro-4, 7-methanoindene (Contains 2 lbs. Technical Heptachlor per gallon, equivalent to 1-1/2 lb. actual Heptachlor plus 1/2 lb. related compounds)

Distributed By

Red Wing Chemical Co., Inc.

920 McCallie Avenue Chattanooga, Tennessee 37403

MAY BE
SPRAY OR
WASH IM
TAMINAT

This produ
water. Do
of wastes.

Do not re
Bury or di

External -
water.

Internal -
Call a ph

Seller mak
product of
and/or han
to label ins

ACCEPTED

AUG 29 1973

6723-8

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND ROENTGENICIDE ACT

surface under attached
and similar situations
are crawl spaces exist.

of the foundation at
all. It is best to apply

over-all treatment under
ched porches, entrance
ions where soil is coarse
nders, or similar spaces
lf. Where crawl spaces

l areas only under
entrances having crawl
ills, around sewer pipes
ns in part (3) feet
a narrow trench
footings. the
of the footings, and
apply another 1
back fill with a thin
inches in depth to the
near feet. Replace the
feet to the back fill.
A trench 30" deep is
ions where the top of
of trenching to a 30"
rod to footing, spacing

of the foundation at the
t is best to apply the

MES
EAR

1 GALLON



LB.

TRATE

MITES

(ON SIDE PANEL)
KEEP OUT OF CHILDREN

	2518
.....	18.63%
.....	6.55%
.....	35.24%
.....	35.24%
.....	4.34%
Total	100.00%
al Heptachlor per gallon, (pounds)	

Co., Inc.
Tennessee 37403

WARNING

MAY BE FATAL IF SWALLOWED. DO NOT BREATHE VAPOR, SPRAY OR MIST. DO NOT GET ON SKIN. IN CASE OF CONTACT WASH IMMEDIATELY WITH SOAP AND WATER. DO NOT CONTAMINATE FEED AND FOOD STUFFS.

This product is toxic to fish, wildlife and birds. Keep out of any body of water. Do not contaminate water by cleaning of equipment, or disposal of wastes.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place away from water supplies.

ANTIDOTE

External — In case of spillage on skin, wash promptly with soap and water.

Internal — Emetic of 1 tablespoonful mustard in tumbler of water. Call a physician.

NOTICE

Seller makes no warranty, expressed or implied, concerning the use of this product other than indicated on the label. Buyer assumes all risk of use and/or handling of this material when such use and/or handling is contrary to label instructions.

