

6810-281-2019

CREOSOTE, TECHNICAL

COAL TAR

TT-C-645A CLASS II

5 Gallons

OCTAGON PROCESS INC.

Edgewater, New Jersey

ACTIVE INGREDIENTS:	PERCENT BY WEIGHT
Refined Coal Tar Creosote.....	98.5%
INERT INGREDIENTS:	
Water and Free Carbon.....	1.5%
	Total 100.0%

CAUTION

KEEP OUT OF REACH OF CHILDREN

Harmful if swallowed. May cause skin irritation. Avoid prolonged or repeated contact with skin. Avoid prolonged breathing of vapor. Use only with adequate ventilation.

PROTECTS AGAINST DECAY AND ROT AND REPELS TERMITES.


DIRECTIONS FOR USE:

Apply to clean surfaces, in well ventilated areas. For best results, use when atmospheric temperature is above 60°F.

BRUSHING: Apply two coats by brushing with a stiff brush. Coat generously, especially around ends, knots, cracks, etc.

DIPPING: Immerse completely. For best results, use moderate heat while timber is soaking. Immerse for at least one-half hour.

USDA REG. NO. 6830-43

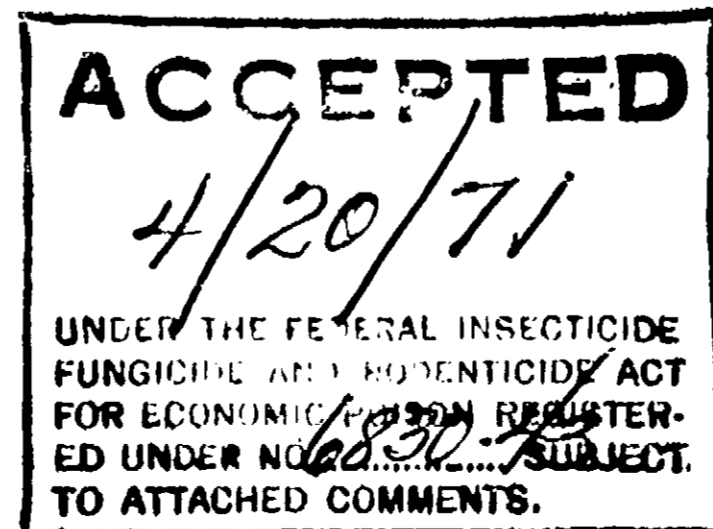

6830-43