

6836-115

5/28/2014

1/14



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

Joanna Holcombe
Lonza Inc.
90 Boroline Road
Allendale, NJ 07401

MAY 28 2014

Subject: Dantabrom RW
EPA Reg. No. 6836-115
Application Date: April 15, 2014
Receipt Date: April 17, 2014

Dear Ms. Holcombe:

This acknowledges receipt of your notification, submitted under the provision of PR Notice 98-10, FIFRA section 3(c)9.

Proposed Notification:

To add a graphic (Oxi-Slugger) and text "Nalco 7346 TAB is fed with the Nalco™ Oxi-Slugger" on the small container label

General Comments:

Based on a review of the material submitted, the following comment applies:

The notification application is acceptable and a copy has been inserted in your file for future reference.

Should you have any questions or comments concerning this letter, please contact me at Henson.Wanda@epa.gov or call (703) 308-6345.

Sincerely,

A handwritten signature in black ink, appearing to read "Wanda Y. Henson".

Wanda Y. Henson (Team 32)
Environmental Protection Specialist
Regulatory Management Branch II
Antimicrobials Division (7510P)

4114

Note to reviewer:

[Items in brackets [AAA] are optional and may/may not be included on final label]

{Items in braces {AAA} are for information purposes and will not appear on final label}

DANTOBROM™ RW

Contents: BRIQUETTES

Active Ingredients:

1-bromo-3-chloro-5,5-dimethylhydantoin.....	54.2%
1,3-dichloro-5,5-dimethylhydantoin.....	28.9%
1,3-dichloro-5-ethyl-5-methylhydantoin.....	15.9%
Other Ingredients.....	1.0%
Total:.....	100.0%

Total Available Halogen as Bromine: 141%

[and/or]

Total Available Halogen as Chlorine: 62.8%

KEEP OUT OF REACH OF CHILDREN

DANGER

See [side] [back] [right] [left] panel for Precautionary Statements and First Aid

EPA Reg. No. 6836-115

EPA Est. No. 6836-PA-01

NET WEIGHT (as marked on container)

[DOT Symbols]

[Country of origin (insert country)]

[Manufactured in (insert country)]


[Barcode]

LONZA INC.

90 Boroline Road

Allendale, NJ 07401

Emergency Contact Number: (_____)

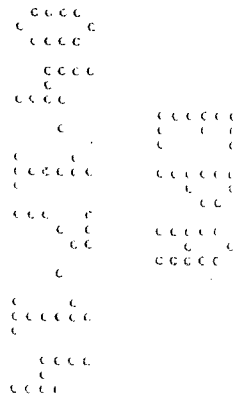

FOR CONTROL OF BACTERIA AND FUNGI

INTERMITTENT OR SLUG METHOD

INITIAL DOSE: When the system is noticeably fouled add 0.1 to 1.0 pounds per 1000 gallons [or 12 to 120 ppm] of the water in the system. Repeat until control is achieved.

SUBSEQUENT DOSE: When microbial control is evident add 0.1 to 0.75 pounds per 1000 gallons [or 12 to 90 ppm] of water in the system every 3 days or as needed to maintain control.

CONTINUOUS FEED METHOD

INITIAL DOSE: When a system is noticeably fouled, add 0.1 to 1.0 pound per 1000 gallons [or 12 to 120 ppm] of water in the system.

SUBSEQUENT DOSE: Continuously feed to maintain dosage of 0.1 to 0.75 pounds per 1000 gallons [or 12 to 90 ppm] of water in the system.

FOR CONTROL OF ALGAE

INTERMITTENT OR SLUG METHOD

INITIAL DOSE: When the system is noticeably fouled add 0.1 to 1.0 pound per 1000 gallons [or 12 to 120 ppm] of water in the system. Repeat until control is achieved.

SUBSEQUENT DOSE: When algae control is evident add 0.1 to 0.75 pounds per 1000 gallons [or 12 to 90 ppm] daily or as needed to maintain control.

CONTINUOUS FEED METHOD

INITIAL DOSE: When the system is noticeably fouled add 0.1 to 1.0 pound per 1000 gallons [or 12 to 120 ppm] of water in the system. Repeat until control is achieved.

SUBSEQUENT DOSE: Continuously feed to maintain a dosage of 0.1 to 0.75 pounds per 1000 gallons [or 12 to 90 ppm] of water in the system.

AIRWASHERS

For use only in industrial airwasher systems that maintain effective mist eliminating components.

Dantobrom RW controls biofilm forming bacteria, fungi and algae in industrial airwasher systems. Add **Dantobrom RW** at the rate of 0.1 to 1.0 pound [12 to 120 ppm] per 1000 gallons of water in the system, depending upon the severity of the contamination.

Control the application by measuring the free chlorine residual in the treated water. There is no need to exceed 1.0 ppm as free chlorine.

Badly fouled systems must be cleaned before treatment is begun.

INTERMITTENT OR SLUG METHOD

INITIAL DOSE: When system is noticeably fouled add to airwasher sump or chill water sump to ensure uniform mixing. Add 0.1 to 1.0 pound per 1000 gallons [or 12 to 120 ppm] of water.

SUBSEQUENT DOSE: When microbial control is evident add 0.1 to 0.60 pounds per 1000 gallons [or 12 to 72 ppm] of water.

CONTINUOUS FEED METHOD

INITIAL DOSE: When system is noticeably fouled add to airwasher sump or chill water sump to ensure uniform mixing. Add 0.1 to 1.0 pound per 1000 gallons [or 12 to 120 ppm] of water.

SUBSEQUENT DOSE: When microbial control is evident add 0.1 to 0.6 pounds per 1000 gallons [or 12 to 72 ppm] of water.

ONCE-THROUGH INDUSTRIAL COOLING WATER SYSTEMS

When used as directed, **Dantobrom RW** effectively controls algal, bacterial, fungal biofilm and mollusks in open or closed-cycle, fresh or salt water, once-through cooling systems. Treat cooling water with **Dantobrom RW** at the system intake or other critical areas, where mixing is uniform.

DOSAGE RATES

INITIAL DOSE: When system is noticeably fouled, add 0.2 to 0.6 pounds per 1000 gallons of water contained in the system. Repeat initial dosage until one to three ppm [mg/L] bromine residual is established for at least 4 hours.

SUBSEQUENT DOSE: When microbial control is evident, add 0.1 to 0.3 pounds per 1000 gallons of water contained in the system. Repeat as needed to maintain one to three ppm bromine residual for at least 4 hours.

FOR USE IN CANISTERS

TO INSTALL CANISTER: Take feeder cap off. Remove canister cut offs. Hold canister so the open end faces down. Insert into feeder. The end of the canister must align with the L-key located inside the feeder at the bottom. **DO NOT FORCE.** Replace feeder cap. To achieve the proper halogen residual, turn the control dial to the appropriate setting and add the required product dosage. Refer to use directions for recirculating cooling water systems and sewage systems or airwasher systems, as appropriate.

Check the canister periodically and replace when empty. Do not attempt to open or refill this canister. **DO NOT REUSE.**

PRECAUTION:

The warranty will be void if this canister is not used with the appropriate feeder. Fire or explosion may result if this canister is used with an incorrect chemical feeder.

NOTE: Some settling may occur during shipment.

PHOTO PROCESSING WASH WATER – THIS USE IS NOT APPROVED IN CALIFORNIA

The photo processing system should first be properly cleaned with a mild hypochlorite solution following manufacturer's instructions. The use of **Dantobrom RW** IS NOT intended to remove an existing buildup of biological growth. **Dantobrom RW** slowly releases both hypobromous and hypochlorous acid when exposed to a flow of water. To prevent or substantially reduce biological growth, **Dantobrom RW** may be introduced into the wash water by suspending **Dantobrom RW** directly in the wash tanks as far as possible from film or paper and away from areas of extreme turbulence. Begin by placing **Dantobrom RW** in the wash tank. If biological growth is observed, add more **Dantobrom RW** waiting several hours between additions. To prevent film damage, rinse **Dantobrom RW** in water before placing into wash tank. It is intended that 1.0 to 3.0 ppm of residual bromine be introduced into the water supply line. Three to nine grams of **Dantobrom RW** will introduce 1.0 to 3.0 ppm residual bromine in 1,000 gallons of water. Actual use will depend on the amount of biological fouling. To avoid excess introduction of bromine into the processor wash tanks, a bromine test kit should be used to periodically test the water in the wash tanks. If a residual above 3.0 ppm is indicated, remove **Dantobrom RW** until the residual drops to 1.0 ppm. If the processor is turned off for any extended period of time, the **Dantobrom RW** in the wash tanks should be removed.

NOTE: Seller liability under all warranties, expressed or implied, is limited to replacement of defective product and seller shall have no liability for consequential damages.



PAPER AND PAPERBOARD PROCESS WATER

Dantobrom RW is a patented biocidal formulation for application in the paper industry.

Dantobrom RW prevents bacterial biofilm formation and deposition through the rapid delivery of an ideal balance of free and combined halogen. When used properly, **Dantobrom RW** can reduce microbiologically induced corrosion, paper spots, holes, breaks and odors. By limiting microbial growth and bacterial biofilm formation, **Dantobrom RW** increases machine runnability reducing unscheduled maintenance and lost production.

The patented **Dantobrom RW** composition provides high solubility, fast dissolution and high halogen content without added binders or inert materials for maximum efficiency and product delivery.

Dantobrom RW can be used in the manufacture of both food and non-food contact paper and paperboard.

APPLICATION

Dantobrom RW should be added to process water streams at or immediately prior to a point of sufficient mixing such as the fan pump or wire pit.

Standard dissolution feeders can be used for **Dantobrom RW** applications. Make-up, machine white waters and returning clarified dilution waters are examples of acceptable treatment waters.

INITIAL DOSE: When the system is noticeably fouled apply 0.5 - 2.0 pounds of **Dantobrom RW** per ton of paper produced to achieve 0.1-1.0 ppm total available halogen as chlorine. Repeat treatment until residual is achieved.

SUBSEQUENT DOSE: When microbial control is evident, apply 0.5 - 2.0 pounds of **Dantobrom RW** per ton of paper produced to achieve 0.1-1.0 ppm total available halogen as chlorine. Repeat periodically as needed to maintain control.

BEVERAGE CAN RINSING OPERATIONS

{Note to reviewer: the use of "biofilm" is not in reference to public health pests}

Dantobrom RW controls the growth of odor causing bacteria, of fungal and algal biofilm, and spoilage bacteria of economic significance in water used for beverage can rinse operations. After rinsing, the cans are dried thoroughly at approximately 350° F and then coated with an impervious lacquer finish.

This product may be added to the rinse water either continuously or intermittently or as needed. The frequency of feeding and duration of the treatment will depend upon the severity of the problem.

BADLY FOULED SYSTEMS must be cleaned before treatment is begun.

Apply **Dantobrom RW** to the rinse water at a concentration ranging from 12 -100 ppm.

DECORATIVE FOUNTAINS

When used as directed, **Dantobrom RW** controls algae [and] [algal biofilm] [microbial biofilm] [bacterial biofilm] in decorative fountains. **Dantobrom RW** may be fed continuously or on an intermittent basis depending on the degree of fouling. For maximum effectiveness, fountains containing heavy algae growth should be cleaned prior to using **Dantobrom RW**.

INITIAL DOSE: Fountains having visible algae growth require an initial dose of 0.1 to 1.0 lbs. per 1,000 gallons of water [12 to 120 ppm active]. Repeat the initial dose until control is achieved.

SUBSEQUENT DOSE: Once control is achieved, add 0.1 to 0.75 lbs. per 1,000 gallons of water daily or as needed to maintain control, by feeding continuously or on an intermittent basis.

{Note to reviewer: For Nonrefillable Industrial Use Containers, Product is non-dilutable solid}

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

PESTICIDE STORAGE: Keep container tightly closed. Store in a cool, dry, well-ventilated place. Do not store in direct sunlight. Do not store at temperatures above 100°F.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to the label instructions contact your State pesticide or environmental control agent or the hazardous waste representative at the nearest EPA regional office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container.


[Metal and plastic containers:] Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incinerate or burn if allowed by State and local authorities. If burned, stay out of smoke. If not tripled rinsed, these containers are acute hazardous wastes and must be disposed in accordance with local, state, and federal regulations.

{Metal containers only:} DO NOT cut or weld metal containers.

[Fiber drums and liners:] Completely empty liner by shaking and tapping sides and bottom to loosen clinging particles. Then dispose of liner and drum in a sanitary landfill or incinerate if allowed by State and local authorities. Do not reuse empty drum or liner.

[Bulk Bag/Super Sack Container:] Completely empty bag into application equipment by shaking and tapping sides and bottom to loosen clinging particles. If not emptied in this manner, the bag may be considered an acute hazardous waste and must be disposed in accordance with local, state and federal regulations. When completely empty, offer for recycling if available or dispose of bag in a sanitary landfill or by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

[Tote Container:] Empty tote container must be returned to a tote collection agent.

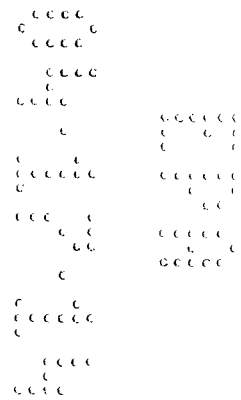

{SMALL CONTAINER LABEL}

DANTOBROM™ RW

Active Ingredients:

1-bromo-3-chloro-5,5-dimethylhydantoin.....	54.2%
1,3-dichloro-5,5-dimethylhydantoin.....	28.9%
1,3-dichloro-5-ethyl-5-methylhydantoin.....	15.9%
Other Ingredients.....	1.0%
Total:.....	100.0%

Total Available Halogen as Bromine: 141%
 [and/or]
 Total Available Halogen as Chlorine: 62.8%

KEEP OUT OF REACH OF CHILDREN


DANGER

See outer container for Precautionary Statements and Use directions.

EPA Reg. No. 6836-115
 EPA Est. No. (as indicated on container)
 NET WEIGHT (as marked on container)

LONZA INC.
 90 Boroline Road
 Allendale, NJ 07401

{Optional proprietary graphic and text}

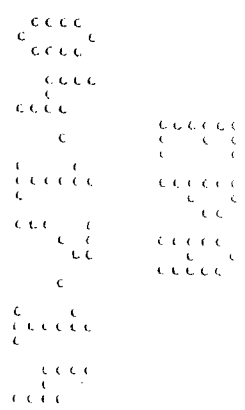

Nalco 7346 TAB is fed
 with the
 Nalco™ Oxi-Slugger

