
6836 - 199

## PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER**: Corrosive. Causes irreversible eye damage. Harmful if swallowed, inhaled or absorbed through the skin. Do not get in eyes or on skin or on clothing. Wear goggles or face shield and chemical resistant gloves when handling. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash contaminated clothing before reuse.

### **ENVIRONMENTAL HAZARDS**

Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.



8/16/2002

## DANTOGARD™ XL-1000 PRESERVATIVE


Page 1 82

ACTIVE INGREDIENTS:

| 1,3-Bis(hydroxymethyl)-5,5-dimethylhyda | ntoin95.5%  |
|---|-------------|
| Hydroxymethyl-5,5-dimethylhydantoin     | 4.0%        |
| INERT INGREDIENTS                       | <u>0.5%</u> |
| TOTAL                                   |             |

## **KEEP OUT OF REACH OF CHILDREN**



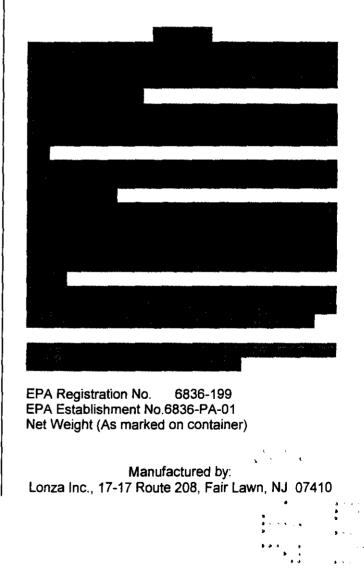

# 272

#### DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

DANTOGARD<sup>™</sup> XL-1000 preserves and aids in the control of bacteria and fungi in liquid detergents, fabric softeners, household cleaning products, soft soaps, water-based paints for household and industrial use, room deodorizers and air fresheners, water-based surfactants, polymer emulsions, protective or decorative coatings, water-based gels for household and industrial products, textiles, water-based adhesives, sealants and caulks, latex for paper coatings, and water-based inks.

٩

**DANTOGARD™ XL-1000** should be added to the formulation to be preserved at a rate of 1.0 to 10.0 lbs. per 1000 lbs. or 0.1% to 1.0% or 1,000 to 10,000 ppm based upon the total weight of the product to be protected.

If the above articles have been treated with Dantogard XL-1000, do not use them as components in materials used in food packaging and food-holding.

DANTOGARD™ XL-1000 may be used in metalworking fluids to prevent fungal growth at concentrations of 0.32% - 0.20%. Levels of DANTOGARD™ XL-1000 should be checked periodically since many cutting oils are unstable upon Workers should take precautions to standing. minimize inhalation exposure to metalworking fluid OSHA limits for oil mist: Time Weighted mists. Average (TWA =  $5 \text{ mg/m}^3$ ); Short Term Exposure Limit (STEL =  $10 \text{ mg/m}^3$ ).

### STORAGE AND DISPOSAL

Keep container closed. Store in a dry place. Do not store at elevated temperatures. Keep from freezing. Do not reuse empty container.

**Pesticide Disposal**: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

### **Container Disposal:**

Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill or incineration or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

Dantogard XL-1000 EPA Reg. No. 6836-199 EPA Amend 06-01-02