DIRECTIONS:

Add Granulated DiHalo to SKIMMER ONLY. Do not add directly to swimming pool water.

For each 10,000 gallons of pool water, add 2-oz. Granulated DiHalo daily, or as may be required to maintain a 0.5 PPM reading using a chlorine swimming pool test kit (1.0 PPM with a bromine test kit).

Before using Granulated DiHalo it is recommended that the swimming pool water be conditioned with DiHalo Conditioner. This increases the retention of the chlorine and bromine in the pool water.


DiHalo Granules are carried to the filter where they are retained to provide a continuous source of active chlorine and bromine for up to 8 hours. Hot sunny days or high bather loads require larger initial dosage or more frequent DiHalo dosage.

For best bacterial kill and economy of use, maintain a pH of 7.2 to 7.6.

DO NOT MIX WITH OTHER MATERIALS, GRANULATED

20 LBS.

1-HALD®

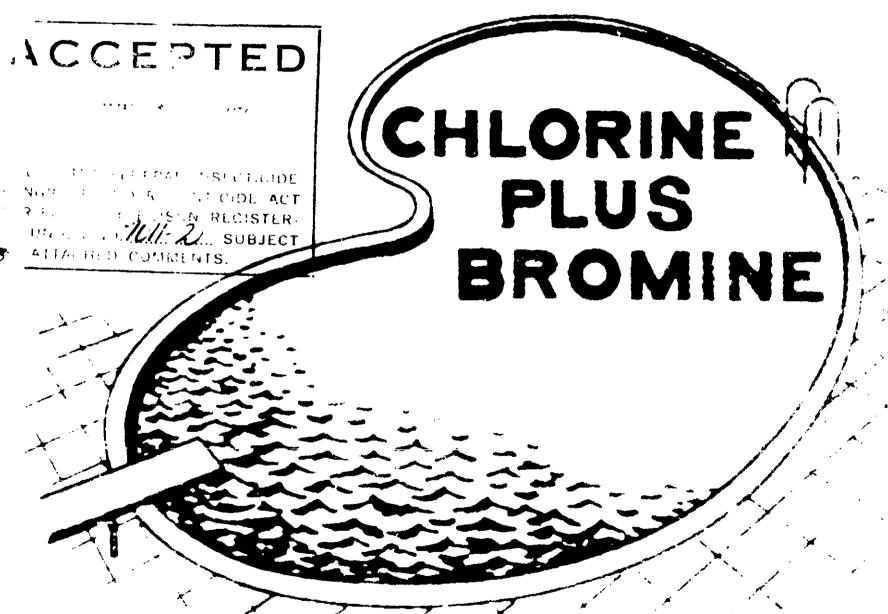

WATER DISINFECTANT

WARNING!

Do not mix with other materials.

Avoid contact with eyes and skin.

Rinse hands after handling.

Harmful if swallowed.

Avoid breathing dust.

Keep container closed when not in use.

Store in cool, dry location.

KEEP OUT OF REACH OF CHILDREN

POISON

ANTIDOTES

Call Physician.

External—Flood with water.

Internal—Drink raw egg white, milk, or mucilage, follow with emetic (tablespoon of mustard in glass of warm water).

> BROMINE DIVISION Drug Research, Inc. Adrian, Michigan

U.S. Pitent 2,779,764 U.S. Potent 0,137,219 U.S. D.A.

ED UNDER NO. 7043.3

CHLORINE

USDA Reg. No. 7043-3

ACTIVE INGREDIENT: CHLORINE 100%

NET CONTENTS—





CAUTION

DANGER! HAZARDOUS LIQUID AND GAS UNDER PRESSURE.

KEEP OUT OF REACH OF CHILDREN

DO NOT HANDLE OR USE UNTIL SAFETY PRECAUTIONS RECOMMENDED BY MANUFACTURER HAVE BEEN READ AND UNDERSTOOD.

Do not breathe air containing this gas.

Do not get in eyes or on skin.

Do not heat cylinders.

Have available emergency gas masks approved by U.S. Bureau of Mines for Chlorine service.

In case of exposure, move patient to fresh air, keep him warm and quiet, and CALL A PHYSICIAN.

CYLINDER STORAGE AND HANDLING

Keep away from heat.
Never drop cylinders.

Do not store in sunshine.
Be sure connections are tight.

Consult MCA Chemical Safety Data Sheet SD-80 for additional Handling Precautions.

I.C.C. REGULATIONS PROHIBIT REFILLING WITHOUT PERMISSION OF OWNER

Do not tamper with fusible safety plug in valve.

Always replace valve outlet cap and valve protection cover.

AMERICAN OIL & SUPPLY CO. NEWARK, N. J.