

WARNING

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes call a physician immediately. Remove and wash contaminated clothing before reuse.

If swallowed give patient doses of powdered charcoal immediately or all he can swallow of raw egg white, milk, gruel or flour and water. Then induce vomiting with salt, soap or mustard in warm water. Call physician immediately.

STORAGE AND HANDLING: Keep from freezing, store at normal room temperature. Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place. This product is toxic to fish. Treated effluent should not be discarded where it will drain into lakes, streams, ponds or treated water. Apply product only as specified on this label.

FREMONT 9929 MICROBIOCIDES

Water Treatment Microbiocide
for Building and Industrial
Cooling Towers

Active Ingredients 17.50%

Disodium cyanodithioimidocarbonate 7.35%
Potassium N-methyldithiocarbamate 10.15%

Inert Ingredients 82.50%
100.00%

EPA Establishment No. 7053-MN-1

EPA Registration No. 7053-17

NET WEIGHT


NET VOLUME

FREMONT INDUSTRIES, INC.
Box 67, Shakopee, Minnesota 55379

WARNING

KEEP OUT OF REACH OF CHILDREN. SEE LEFT PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS. SEE RIGHT PANEL FOR USE OR APPLICATION DIRECTIONS.

Fremont 9929 Microbiocides and fungi in recirculating systems. Before treatment with this product to remove algae growth the system should be flushed with 1 fluid ounce of Fremont 9929 Microbiocides per 1000 gallons of water. Repeat the flushing at the required frequency and the severity of the algae growth. Dilute the appropriate amount of water before use.

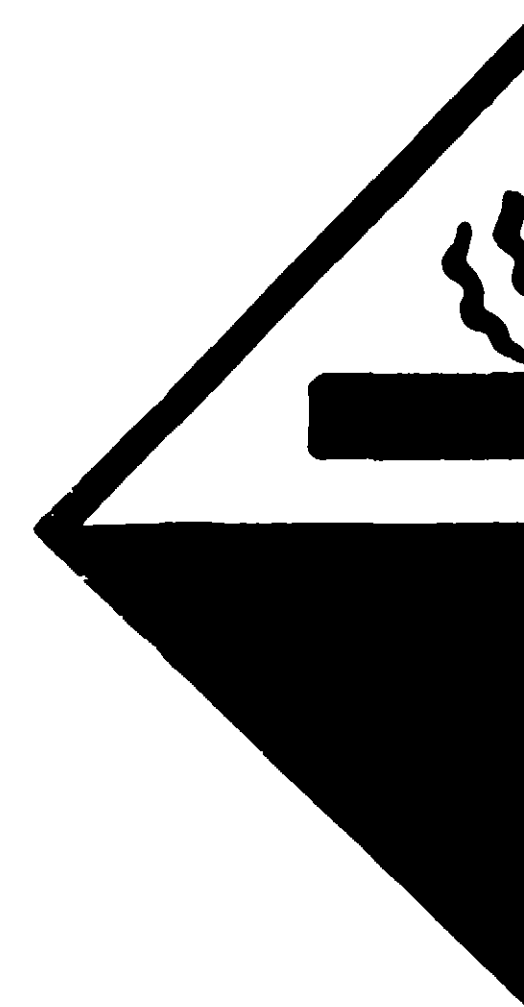

FREMONT 9929 MICROBIOCIDES

Water Treatment Microbiocide
for Building and Industrial
Cooling Towers

Active Ingredients 17.50%

Disodium cyanodithioimidocarbonate 7.35%
Potassium N-methyldithiocarbamate 10.15%

Inert Ingredients 82.50%
100.00%

EPA Establishment No. 7053-MN-1

EPA Registration No. 7053-17

NET WEIGHT

NET VOLUME

FREMONT INDUSTRIES, INC.
Box 67, Shakopee, Minnesota 55379

WARNING

KEEP OUT OF REACH OF CHILDREN. SEE LEFT
PANEL FOR ADDITIONAL PRECAUTIONARY
STATEMENTS. SEE RIGHT PANEL FOR USE OR
APPLICATION DIRECTIONS.

USE DIRECTIONS

Fremont 9929 Microbiocide is used to inhibit the growth of algae, bacteria and fungi in recirculating commercial and industrial cooling water systems. Before treatment with Fremont 9929 Microbiocide systems must be cleaned to remove algae growth, microbiological slime and other deposits. Then the system should be treated with an initial slug addition of 3.3 to 6.6 fluid ounces of Fremont 9929 Microbiocide per 1000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 1.1 to 6.6 fluid ounces of Fremont 9929 Microbiocide per 1000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions of Fremont 9929 Microbiocide should be made to the sump of water cooling towers. Dilute the appropriate amount of Fremont 9929 Microbiocide in 1 to 2 gallons of water before adding to the sump of the tower.

