



CREOSOTE WOOD PRESERVING OIL

WOOD PRESERVATIVE: Chekr Brand Refined Creosote Oil is the ideal product for protecting, preserving and beautifying fence rails and posts. It is easily applied by dip or brush as indicated below and when used as directed it gives protection against dry rot and termites.

DIP: Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well seasoned. To get effective treatment they should be immersed in the creosote oil for a period of 12 to 48 hours.

BRUSH: Brush generously over surface to be treated being sure to fill all cracks and crevices in the wood. After first coat has dried, (approximately 24 hours depending on the weather) a second coat should be applied again using material very generously.

Treated wood should never be cut or sawed unless absolutely necessary. All cutting should be done before treatment whenever possible. If it is cut after treatment the exposed section should be coated with several applications of creosote oil.

At least 6 inches of treated wood should extend above the ground when setting posts. It is always better to coat the entire surface above the ground whenever possible.

CAUTION! Harmful or fatal if swallowed or absorbed through skin. Avoid prolonged or repeated contact with skin. If spilled on hands, wash well with soap and water. Avoid prolonged breathing of vapor or spray mist. Use with adequate ventilation. **COMBUSTIBLE:** Keep away from heat, sparks or open flame.

KEEP OUT OF REACH OF CHILDREN

CONTAINER DISPOSAL: This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product as only specified on this label. Do not re-use container. Destroy container by perforating or crushing and burying it in a safe place.

**EPA Est. 7190-MO-1
EPA Reg. No. 7109-3**

**FOR BEST RESULTS
ALWAYS USE
THE FOLLOWING
CHEKR BRAND
PRODUCTS:**

- Alcohol
- Miracle Brush Cleaner
- Lacquer Thinner
- Linseed Oil
- Paint Thinner
- Paint Remover
- Penta Wood Preservative
- E Z Sander
- Caulk Cartridges
- Pure Putty
- Glazing Compound
- Joint Cement
- Spackling Compound

**LABORATORY
TESTED FOR
QUALITY**

**RI
CREOS
WOOD P
HIGH
FOR DIPP
OR S**

ACTIVE INGR
Coal Tar Cre
Petroleum Hy

**PANDA-
Division ST.
ST. LO**

**KEEP OUT C
Harmful or fatal if sw
See other warning**

NET



11-10-75

7107-3

**FOR BEST RESULTS
ALWAYS USE
THE FOLLOWING
CHEKR BRAND
PRODUCTS:**

- Alcohol
- **Miracle Brush Cleaner**
- **Lacquer Thinner**
- **Linseed Oil**
- **Paint Thinner**
- **Paint Remover**
- **Penta Wood Preservative**
- **E Z Sander**
- **Caulk Cartridges**
- **Pure Putty**
- **Glazing Compound**
- **Joint Cement**
- **Spackling Compound**

**REFINED
CREOSOTE OIL
WOOD PRESERVATIVE**

HIGHLY REFINED

**FOR DIPPING, BRUSHING
OR SPRAYING**

	ASSAY	
ACTIVE INGREDIENTS	100%
Coal Tar Creosote	75%
Petroleum Hydrocarbons	25%

PANDA-VICTORY PAINTS
Division ST. LOUIS PAINT MFG. CO.
ST. LOUIS, MO. 63104

CAUTION

KEEP OUT OF REACH OF CHILDREN

Harmful or fatal if swallowed or absorbed through skin.
See other warning elsewhere on this container.

**LABORATORY
TESTED FOR
QUALITY**

NET ONE GALLON

leal product
It is easily
ted it gives

bers should
they should

ill all cracks
y 24 hours
ing material

essary. All
is cut after
lications of

d when set-
ound when-

Avoid pro-
l with soap
e with ade-
open flame.

Keep out of
equipment
label. Do
nd burying



CREOSOTE WOOD PRESERVING OIL

WOOD PRESERVATIVE: Chekr Brand Refined Creosote Oil is the ideal product for protecting, preserving and beautifying fence rails and posts. It is easily applied by dip or brush as indicated below and when used as directed it gives protection against dry rot and termites.

DIP: Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well seasoned. To get effective treatment they should be immersed in the creosote oil for a period of 12 to 48 hours.

BRUSH: Brush generously over surface to be treated being sure to fill all cracks and crevices in the wood. After first coat has dried, (approximately 24 hours depending on the weather) a second coat should be applied again using material very generously.

Treated wood should never be cut or sawed unless absolutely necessary. All cutting should be done before treatment whenever possible. If it is cut after treatment the exposed section should be coated with several applications of creosote oil.

At least 6 inches of treated wood should extend above the ground when setting posts. It is always better to coat the entire surface above the ground whenever possible.

CAUTION! Harmful or fatal if swallowed or absorbed through skin. Avoid prolonged or repeated contact with skin. If spilled on hands, wash well with soap and water. Avoid prolonged breathing of vapor or spray mist. Use with adequate ventilation. **COMBUSTIBLE:** Keep away from heat, sparks or open flame.

KEEP OUT OF REACH OF CHILDREN

CONTAINER DISPOSAL: This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product as only specified on this label. Do not re-use container. Destroy container by perforating or crushing and burying it in a safe place.

EPA Est. 7190-MO-1
EPA Reg. No. 7109-3

FOR BEST RESULTS
ALWAYS USE
THE FOLLOWING
CHEKR BRAND
PRODUCTS:

- Alcohol
- Miracle Brush Cleaner
- Lacquer Thinner
- Linseed Oil
- Paint Thinner
- Paint Remover
- Penta Wood Preservative
- E Z Sander
- Caulk Cartridges
- Pure Putty
- Glazing Compound
- Joint Cement
- Spackling Compound

**LABORATORY
TESTED FOR
QUALITY**

REFILL
**CREOSOTE
WOOD PRESERVING OIL**
HIGHLY
**FOR DIPPING
OR SPRAYING**

ASSOCIATED
ACTIVE INGREDIENTS:
Coal Tar Creosote
Petroleum Hydrocarbons

PANDA-VICTOR
Division ST. LOUIS
ST. LOUIS, MO

CAUTION
KEEP OUT OF REACH OF CHILDREN
Harmful or fatal if swallowed
See other warning elsewhere

NET ONE GALLON



**FOR BEST RESULTS
ALWAYS USE
THE FOLLOWING
CHEKR BRAND
PRODUCTS:**

- Alcohol
- Miracle Brush Cleaner
- Lacquer Thinner
- Linseed Oil
- Paint Thinner
- Paint Remover
- Penta Wood Preservative
- E Z Sander
- Caulk Cartridges
- Pure Putty
- Glazing Compound
- Joint Cement
- Spackling Compound

**LABORATORY
TESTED FOR
QUALITY**

**REFINED
CREOSOTE OIL
WOOD PRESERVATIVE**

**HIGHLY REFINED
FOR DIPPING, BRUSHING
OR SPRAYING**


	ASSAY	
ACTIVE INGREDIENTS		100%
Coal Tar Creosote		75%
Petroleum Hydrocarbons		25%

PANDA-VICTORY PAINTS
Division ST. LOUIS PAINT MFG. CO.
ST. LOUIS, MO. 63104

CAUTION

KEEP OUT OF REACH OF CHILDREN
Harmful or fatal if swallowed or absorbed through skin.
See other warning elsewhere on this container.

NET ONE GALLON

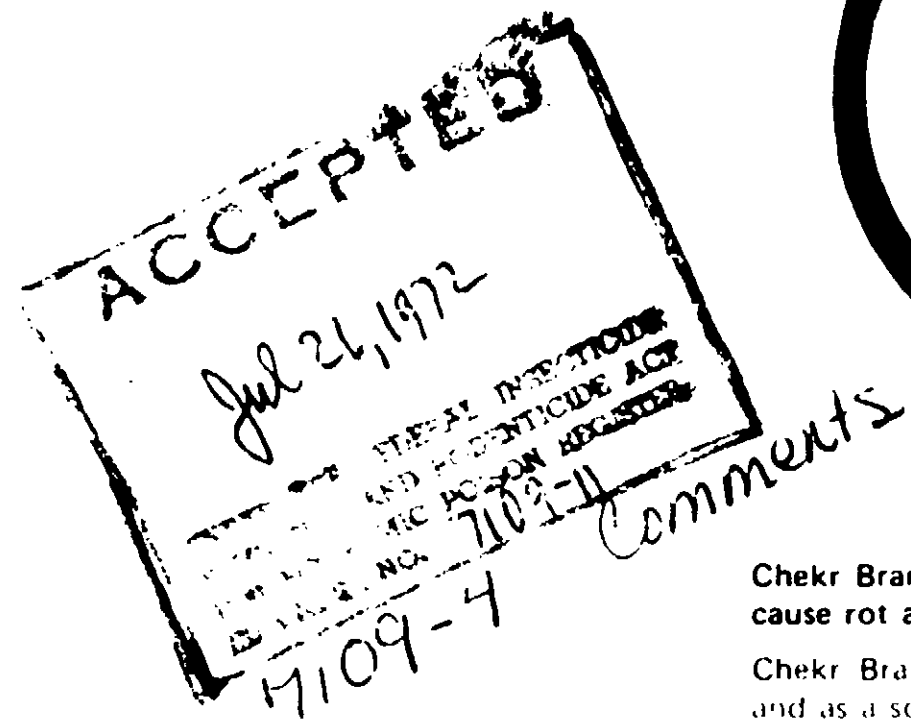

DIRECTIONS

Chekr Brand Penta is a clear solution for protecting wood against fungus growths which cause rot and stain, Termites, Powder Post Beetles, and Carpenter Ants.

Chekr Brand Penta is especially effective in termite control, both as a wood preservative and as a soil poison.

WOOD PRESERVATIVE

Before treatment, all wood should be normally dry. All unsound wood should be removed two feet beyond any visible evidence of decay. For best results, Chekr Brand Penta should be applied so as to effect maximum penetration into the wood and maximum absorption at joints and ends. Complete immersion, where possible, in an open tank is the best procedure for accomplishing this. At least five minutes immersion per inch thickness is recommended for all cases. Where wood will be in direct contact with the ground, such as in the case of fence posts, the immersion period should be from 12-48 hours, and the posts should be peeled of bark, dry and well seasoned.

Where the immersion treatment is impractical, heavy brush application may be used. Where the wood will be in direct contact with the ground, several brush applications should be given.

Permit Chekr Brand Penta to dry at least two weeks before applying paint.

Estimated coverage: 5 to 10 gallons per 1000 board feet for open tank treatment 200 square feet per gallon for brush application

TERMITE CONTROL

Clean out carefully all loose wood and debris under or around infested buildings. Spray all ground under buildings at rate of 2 gallons of Chekr Brand Penta per 5 cubic feet of ground. Break all wood-to-earth contacts, such as steps, door frames, etc., and replace with Chekr Brand Penta treated wood or concrete. Where construction permits, dig a trench around all foundations to a depth of 12 to 18 in. For buildings with deep foundations, trench 30 inches deep. Apply 1/2 gallon per linear foot in trenches up to 15 inches deep and 1 gallon per linear foot in deeper trenches. Do not trench below the footing. Trees, shrubbery or flowers should be protected from the soil by tar or heavy kraftpaper.

CAUTION

Do not reuse empty container. Destroy by perforating or crushing. Bury or discard in a safe place. Do not contaminate water by cleaning of equipment or disposal of wastes. Wear rubber gloves and protective clothing when handling freshly treated lumber.

WARNING: May be fatal or harmful if swallowed or absorbed through skin. Causes skin irritations. Do not breathe vapor, fumes or spray mist. Do not get in eyes, on skin or on clothing. Wash thoroughly. **INFLAMMABLE DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.**

KEEP OUT OF THE REACH OF CHILDREN

"EPA Reg. No. 7109-4"

CHEKR BRAND PENTA IS A CLEAR OIL WOOD PRESERVATIVE FOR CLEAN TREATMENT OF LUMBER, MILLWORK, PLYWOOD, AND OTHER FOREST PRODUCTS. SLIGHT PETROLEUM ODOR, PENETRATING, AND PAINTABLE.

USES

PRESERVES WOOD
STOPS ROT AND DECAY
PREVENTS FUNGI AND MOLDS OF WOOD
CONTROLS TERMITES
CONTROLS POWDER POST BEETLES
LABORATORY TESTED FOR QUALITY

See other