K R

wood against fungus growths which d Carpenter Ants.

ontrol, both as a wood preservative

TIVE

ry. All unsound wood should be decay. For best results, Chekr ximum penetration into the wood mplete immersion, where possible, lishing this. At least five minutes all cases. Where wood will be in fence posts, the immersion period be peeled of bark, dry and well

y brush application may be used. ground, several brush applications

before applying paint.

ar**d feet for open ta**nk treatment,

ROL

nder or around infested buildings s of Cheki Brand Penta per 5 cubic uch as steps, door frames, etc., and icrete. Where construction permits, to 18 in For buildings with deep ilon per linear foot in trenches up deeper trenches Do not trench should be protected from the soil

ng or crushing. Bury or discard in iing of equipment or disposal of ng when handling freshly treated

or absorbed through skin Causes way mist. Do not get in eyes, on MABLE, DO NOT USE, POUR,

F CHILDREN **|4''**




CHEKR BRAND PENTA IS A CLEAR OIL WOOD PRE-SERVATIVE FOR CLEAN TREATMEN' OF LUMBER, MILLWORK, PLYWOOD, AND **OTHER** FOREST PRODUCTS. SLIGHT PETROLEUM ODOR, PENETRATING, AND PAINT-ABLE.

USES **PRESERVES WOOD STOPS ROT AND DECAY PREVENTS FUNGI AND** MOLDS OF WOOD **CONTROLS TERMITES CONTROLS POWDER POST BEETLES**

> LABORATORY TESTED FOR QUALITY





PENTA WOOD PRESERVATIVE **READY TO USE** ASSAY

CHEKR

BRAND

W.TIVE INGREDIENTS:	
Pentachlorophenol*	4.50
Uther Chlorophenols & Related Compounds*	
Petroleum Solvents	95.00%
Inert Ingredients	.20%
* Equivalent to 5. Technical Pentachioropheno: a detect in Federal fication TTV, 570	Speci

WARNING

KEEP OUT OF REACH OF CHILDREN See other warnings elsewhere on this container.

PANDA-VICTORY PAINTS Division ST. LOUIS PAINT MFG. CO. ST. LOUIS, MO. 63104

NET ONE GALLON

C H E K R

BRAND

ACCEPTEL

ED URUE I NO

TT. AND POTONS PROPAGE

romments Chekr Brand Penta is a clean solution for protecting wood against fungus growths which cause rot and stain, Termites, Powder Post Beetles, and Carpenter Ants.

DIRECTIONS

Chekr Brand Penta is especially effective in termite control, both as a wood preservative and as a soil poison.

WOOD PRESERVATIVE

Before treatment, all wood should be normally dry. All unsound wood should be removed two feet beyond any visible evidence of decay. For best results, Chekr Brand Penta should be applied so as to effect maximum penetration into the wood and maximum absorption at joints and ends. Complete immersion, where possible, in an open tank is the best procedure for accomplishing this. At least rive minutes immersion per inch thickness is recommended for all cases. Where wood will be in direct contact with the ground, such as in the case of fence posts, the immersion period should be from 12-48 hours, and the posts should be peeled of bark, dry and well seasoned.

Where the immersion treatment is impractical, heavy brush application may be used. Where the wood will be in direct contact with the ground, several brush applications should be given.

Permit Chekr Brand Penta to dry at least two weeks before applying paint.

Estimated coverage: 5 to 10 gallons per 1000 board feet for open tank treatment; 200 square feet per gallon for brush application.

TERMITE CONTROL

Clean out carefully all loose wood and debris under or around infested buildings. Spray all ground under buildings at rate of 2 gallons of Cheki Brand Penta per 5 cubic feet of ground. Break all wood-to-earth contacts, such as steps, door frames, etc., and replace with Chekr Brand Penta treated wood or concrete. Where construction permits, dig a trench around all foundations to a depth of 12 to 18 in. For buildings with deep foundations, trench 30 inches deep. Apply 1/2 gallon per linear foot in trenches up to 15 inches deep and 1 gallon per linear foot in deeper trenches. Do not trench below the footing. Trees, shrubbery or flowers should be protected from the soil by tar or heavy kraftpaper.

CAUTION

Do not reuse empty container. Destroy by perforating or muching. Bury or discard in a safe place. Do not contaminate water by cleaning of equipment or disposal of wastes. Wear rubber gloves and protective clothing when handling freshly treated lumber.

WARNING: May be fatal or harmful if swallowed or absorbed through skin. Causes skin irritations. Do not breathe vapor, fumes or spray mist. Do not get in eyes, on skin or on clothing. Wash thoroughly. INFLAMMABLE, DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

KEEP OUT OF THE REACH OF CHILDREN

"EPA Reg. No. 7109-4"



CHEKR BRAND PENTA IS A CLEAR OIL WOOD PRE-SERVATIVE FOR CLEAN TREATMENT OF LUMBER, MILLWORK, PLYWOOD, AND **OTHER** FOREST PRODUCTS. SLIGHT PETROLEUM ODOR, PENETRATING, AND PAINT-ABLE.

USES **PRESERVES WOOD** STOPS ROT AND DECAY PREVENTS FUNGI AND MOLDS OF WOOD **CONTROLS TERMITES CONTROLS POWDER POST BEETLES** LABORATORY

TESTED FOR QUALITY

ACTIVE I Pentach Other C Petroleu Inert In

* Equivale fication TT

KEEP See other 1

KR

IONS

scting wood against fungus growths which ities, and Carpenter Ants.

mite control, both as a wood preservative

RVATIVE

ally dry. All unsound wood should be nce of decay. For best results, Chekr et maximum penetration into the wood Complete immersion, where possible, ccomplishing this. At least five minutes d for all cases. Where wood will be in case of fence posts, the immersion period should be peeled of bark, dry and well

il, heavy brush application may be used. ith the ground, several brush applications

weeks before applying paint.

00 board feet for open tank treatment;

ONTROL

pris under or around infested buildings. gallons of Chekr Brand Penta per 5 cubic acts, such as steps, door frames, etc., and or concrete. Where construction permits, of 12 to 18 in. For buildings with deep 1/2 gallon per linear foot in trenches up oot in deeper trenches. Do not trench wers should be protected from the soil

ON

rforating or crushing. Bury or discard in cleaning of equipment or disposal of clothing when hendling freshly treated

owed or absorbed through skin. Causes or spray mist. Do not get in eyes, on FLAMMABLE, DO NOT USE, POUR, FLAME.

ICH OF CHILDREN

, 710**9-4**"



CHEKR BRAND PENTA IS A CLEAR OIL WOOD PRE-SERVATIVE FOR CLEAN TREATMENT OF LUMBER, MILLWORK, PLYWOOD, AND **OTHER** FOREST PRODUCTS. SLIGHT PETROLEUM ODOR, PENETRATING, AND PAINT-ABLE.

USES **PRESERVES WOOD STOPS ROT AND DECAY** PREVENTS FUNGI AND MOLDS OF WOOD **CONTROLS TERMITES CONTROLS POWDER POST BEETLES**

LABORATORY TESTED FOR QUALITY

ACTIVE INGREDIENTS:

C H E K R BRAND

$M_{N_{1}} = M_{1}$

- 1 - 7

PENTA **WOOD PRESERVATIVE READY TO USE**

ASSAY


Pentachlorophenol*	4.30%
Other Chlorophenols & Related Compounds*	.50%
Petroleum Solvents	5.00%
Inert Ingredients	
• Equivalent to 5% Technical Pentachlorophenoil as defined in Federal fication TTW-570.	

WARNING

KEEP OUT OF REACH OF CHILDREN See other warnings elsewhere on this container.

PANDA-VICTORY PAINTS Division ST. LOUIS PAINT MFG. CO. ST. LOUIS, MO. 63104

NET ONE GALLON ACCEPTED WITH COMMENTS

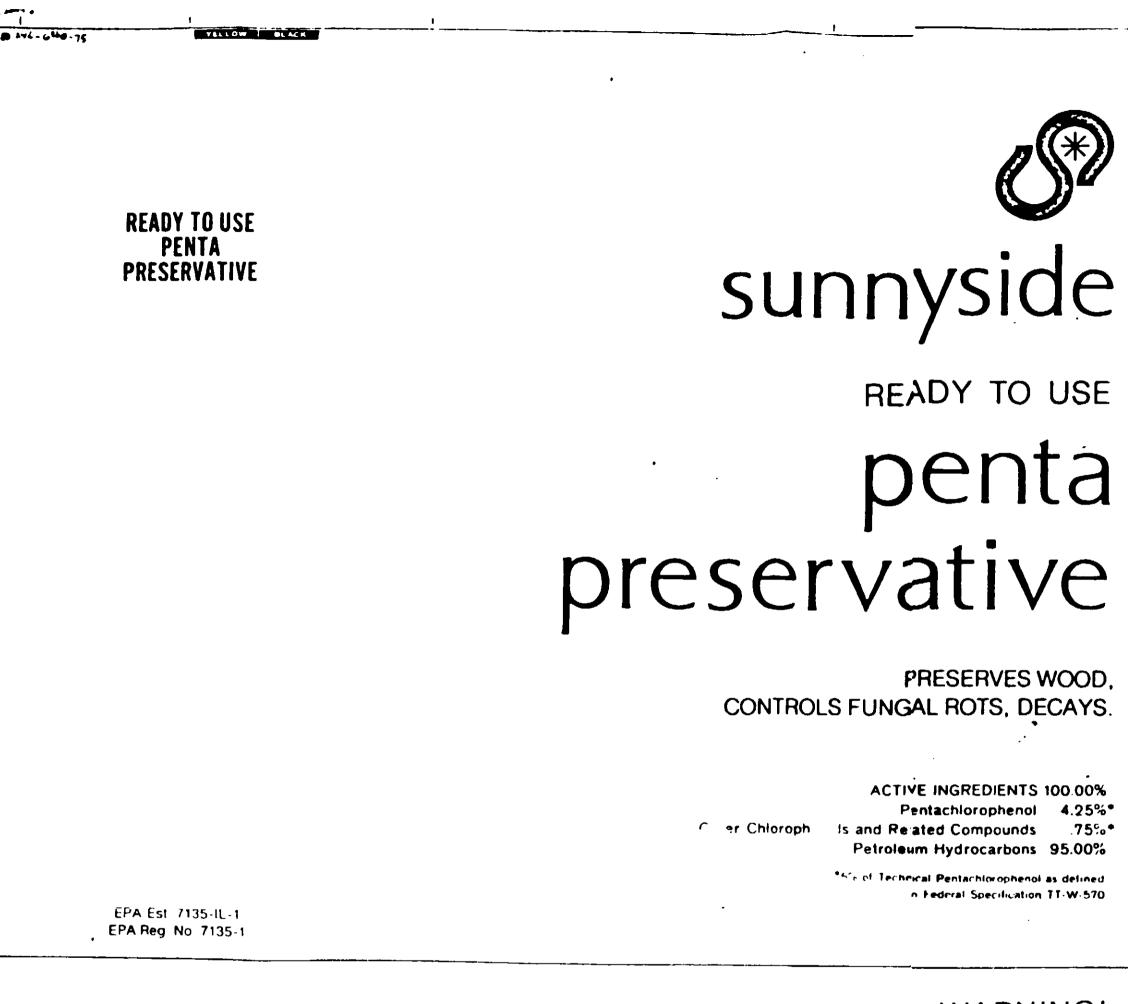


WARNING! KEEP OUT OF REACH OF CHILDREN. HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN. COMBUSTIBLE. SKIN AND EYE IRRITANT. See other warnings on back panel. Use only as directed

ONE GALLON 3.785 LITERS

depend on the top quality of sunnyside

6 **



READY TO USE PENTA PRESERVATIVE

DIRECTIONS

Wood Preservation: In treating new construction lumber, individual members should be soaked in Penta Preservative for at least 3 minutes per inch of thickness. All joints and ends of boards' should receive particularly thorough treatment. Treated wood cannot be painted. Do not nail wallboard or other absorbent materials over treated wood until completely dry.

On existing structures Penta Preservative will control fungal rots and decay only. Wood not in contact with the ground such as frames, subfloors, sills, joists, etc., should be given 2 applications by swabbing or brushing.

soned, and soaked for at least 24 hours and preferably 48 hours in a vertical position with butts down. The best treatment is full length coverage; if butt treatment is used, set with 12 inches of treated wood extending above ground level.

Ready 1

Sunnysic poles, p ing to c decay, m wood-box finished treated than Rea basswood and cott CAUTION TROLEUM ing. CA Keep awa por or # clothing contact ous amou containe bottles (empty cos ing. Bu: This pro of lakes by clean this pro Do not us other st livestocl

Fence posts should be peeled, sea-

SUNN

NOTE -- 1

worn when

Protect s

with Read

Use only

·· KEEP OUT

depend on the top quality of sunnyside

CUST. SUNNYSIDE DESIGNICAL. PENTA INESERVATIVE ENG. 1249-5 S.O. 242-640 SIZE402x610x407C.E. 20400x9562 B.P. H 2015 2 A DATE & 8-75 NO. PROOFS PROOF DATE LCHANGE A ...