

DIRECTIONS

Chekr Brand Penta is a clear solution for protecting wood against fungus growths which cause rot and stain, Termites, Powder Post Beetles, and Carpenter Ants.

Chekr Brand Penta is especially effective in termite control, both as a wood preservative and as a soil poison.

WOOD PRESERVATIVE

Before treatment, all wood should be normally dry. All unsound wood should be removed two feet beyond any visible evidence of decay. For best results, Chekr Brand Penta should be applied so as to effect maximum penetration into the wood and maximum absorption at joints and ends. Complete immersion, where possible, in an open tank is the best procedure for accomplishing this. At least five minutes immersion per inch thickness is recommended for all cases. Where wood will be in direct contact with the ground, such as in the case of fence posts, the immersion period should be from 12-48 hours, and the posts should be peeled of bark, dry and well seasoned.

Where the immersion treatment is impractical, heavy brush application may be used. Where the wood will be in direct contact with the ground, several brush applications should be given.

Permit Chekr Brand Penta to dry at least two weeks before applying paint.

Estimated coverage: 5 to 10 gallons per 1000 board feet for open tank treatment, 200 square feet per gallon for brush application.

TERMITE CONTROL

Clean out carefully all loose wood and debris under or around infested buildings. Spray all ground under buildings at rate of 2 gallons of Chekr Brand Penta per 5 cubic feet of ground. Break all wood-to-earth contacts, such as steps, door frames, etc., and replace with Chekr Brand Penta treated wood or concrete. Where construction permits, dig a trench around all foundations to a depth of 12 to 18 in. For buildings with deep foundations, trench 30 inches deep. Apply 1/2 gallon per linear foot in trenches up to 15 inches deep and 1 gallon per linear foot in deeper trenches. Do not trench below the footing. Trees, shrubbery or flowers should be protected from the soil by tar or heavy kraftpaper.

CAUTION

Do not reuse empty container. Destroy by perforating or crushing. Bury or discard in a safe place. Do not contaminate water by cleaning of equipment or disposal of wastes. Wear rubber gloves and protective clothing when handling freshly treated lumber.

WARNING: May be fatal or harmful if swallowed or absorbed through skin. Causes skin irritations. Do not breathe vapor, fumes or spray mist. Do not get in eyes, on skin or on clothing. Wash thoroughly. **INFLAMMABLE. DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.**

KEEP OUT OF THE REACH OF CHILDREN

"EPA Reg. No. 7109-4"




CHEKR BRAND PENTA IS A CLEAR OIL WOOD PRESERVATIVE FOR CLEAN TREATMENT OF LUMBER, MILLWORK, PLYWOOD, AND OTHER FOREST PRODUCTS. SLIGHT PETROLEUM ODOR, PENETRATING, AND PAINT-ABLE.

USES

**PRESERVES WOOD
STOPS ROT AND DECAY
PREVENTS FUNGI AND
MOLDS OF WOOD
CONTROLS TERMITES
CONTROLS POWDER
POST BEETLES**

**LABORATORY
TESTED FOR
QUALITY**

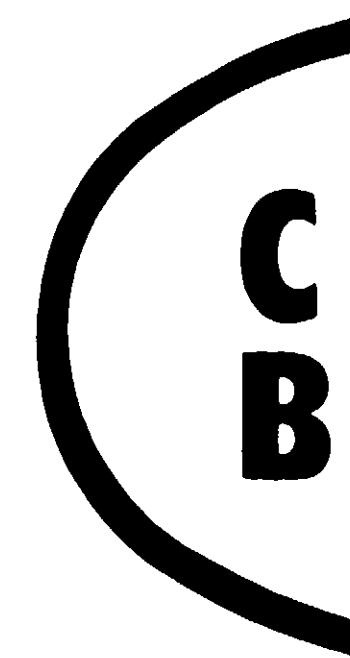

**PE
WOOD
REA**

ACTIVE INGREDIENT
Pentachlorophenol*.
Other Chlorophenols
Petroleum Solvents.
Inert Ingredients.....

* Equivalent to 5% T
fication TTW 570

**KEEP OUT
See other warnir**

P.
Divis

NE



UTIONS

protecting wood against fungus growths which
beetles, and Carpenter Ants.

termite control, both as a wood preservative

SERVATIVE

ormally dry. All unsound wood should be
dence of decay. For best results, Chekr
ffect maximum penetration into the wood
ds. Complete immersion, where possible,
accomplishing this. At least five minutes
ded for all cases. Where wood will be in
he case of fence posts, the immersion period
ts should be peeled of bark, dry and well

ical, heavy brush application may be used.
with the ground, several brush applications

ro weeks before applying paint.

1000 board feet for open tank treatment,
tron

CONTROL

debris under or around infested buildings.
2 gallons of Chekr Brand Penta per 5 cubic
ontacts, such as steps, door frames, etc., and
od or concrete. Where construction permits,
pth of 12 to 18 in. For buildings with deep
ly 1/2 gallon per linear foot in trenches up
r foot in deeper trenches. Do not trench
flowers should be protected from the soil

TION

perforating or crushing. Bury or discard in
by cleaning of equipment or disposal of
ve clothing when handling freshly treated

valloved or absorbed through skin. Causes
nes or spray mist. Do not get in eyes, on
INFLAMMABLE. DO NOT USE. POUR,
N FLAME.

REACH OF CHILDREN

No. 7109-4"



CHEKR BRAND PENTA IS
A CLEAR OIL WOOD PRE-
SERVATIVE FOR CLEAN
TREATMENT OF LUMBER,
MILLWORK, PLYWOOD, AND
OTHER FOREST PRODUCTS.
SLIGHT PETROLEUM ODOR,
PENETRATING, AND PAINT-
ABLE.

USES

PRESERVES WOOD

STOPS ROT AND DECAY

**PREVENTS FUNGI AND
MOLDS OF WOOD**

CONTROLS TERMITES

**CONTROLS POWDER
POST BEETLES**

**LABORATORY
TESTED FOR
QUALITY**



5%

PENTA

WOOD PRESERVATIVE

READY TO USE

ASSAY

ACTIVE INGREDIENTS:

Pentachlorophenol*	4.30%
Other Chlorophenols & Related Compounds*	.50%
Petroleum Solvents	95.00%
Inert Ingredients	.20%

* Equivalent to 5% Technical Pentachlorophenol as defined in Federal Speci-
fication TTW 570

WARNING

KEEP OUT OF REACH OF CHILDREN

See other warnings elsewhere on this container.

PANDA-VICTORY PAINTS
Division ST. LOUIS PAINT MFG. CO.
ST. LOUIS, MO. 63104

NET ONE GALLON