

FOR SPARKLING POOLS

Su-Clor Shock

Designed to be used in:

- Pools with green water due to algae
- Pools with visible algae on floor and sides
- Pools starting up using water from previous season
- Pools freshly filled that are green or brown due to mineral impurities
- Pools with cloudy water
- Pools as a periodic shock treatment in regular maintenance

**KEEP OUT OF REACH OF CHILDREN
DANGER**

SEE THIS CAUTION STATEMENT AND OTHER
PRECAUTIONS ON SIDE PANELS
BEFORE OPENING CONTAINER

NET WEIGHT 2 LBS. (32 OZ.)

6. This product, because of its potent formulation, can be dangerous if not used properly. Do not mix with any other chemicals. This could result in a violent chemical reaction. Do not add water to this product in a closed container. Do not add this product to a small amount of water in a pan. When adding this product to skimmer make sure pump is on and water is circulating so that material is drawn into recirculation system. Do not allow buildup of dry material in skimmer as gases generated may cause an explosion.


DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. The purpose of this product is to provide a shock treatment to pools that are unacceptable for use due to the presence of algae or discolored water because of neglect or the presence of minerals such as iron or manganese. 2 lbs. of this product will impart 1.5 ppm of chlorine to 15,000 gallons of water which should correct the cause of trouble. A second treatment may be necessary if pool does not respond to first dose.

1. Remove as much as possible any floating, suspended and/or sunken matter that may be present by using a hand skimmer, net, or vacuuming to waste.
2. Adjust pool water pH to 7.2-7.6.
3. Start filter and add Shock at the rate of 1 lb. per 6000 gallons of water. Add Shock either directly to pool or through skimmer following instructions #2 under special precautions. Allow filter to run continuously being careful to empty strainer basket in front of pump if suction is impeded. As there may be a tendency for the filter to clog due to the accumulation of dead algae. Backwash filter if this occurs. Repeat dosage on this shock treatment if necessary. If there is no improvement in the water, consult your dealer or the manufacturer for further advice.
4. After results appear, remove discolored residue from between 1 and 3 ppm. Bathing should not be allowed in water from the pool until the chlorine residual is 1.0-2.0 ppm.

5. WASTE AND DISPOSAL: Keep product dry in tightly closed container when not in use. Store in a cool, dry, well-ventilated area away from heat or open flame. In case of decomposition, isolate container, if possible, and flood with large amounts of water. Do not reuse empty container. Rinse empty container thoroughly with water to dissolve all material before disposal. Do not use heat, open flame, or disperse in any body of water or drain.

EPA Reg. No. 7124-15-AA

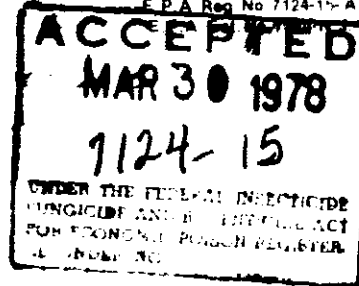

BEST DOCUMENT AVAILABLE