

**PENTA
(Water
Repellent)**



sunnyside penta wood preservative

WATER REPELLENT

ACCEPTED
OCT 7 1975
PENTA (Water Repellent)
Under the Federal Insecticide, Fungicide, and Rodenticide Act.
Registered under Reg. No. 7135-2

DIRECTIONS

Immerse wood to be treated in Water Repellent Penta for 3 minutes or longer; if dipping is impossible, apply 2 liberal coats by brush or spray, allowing a minimum of one hour between applications. Allow a minimum of 24 hours' drying time prior to painting treated wood. For lumber to be used under severe conditions of exposure as in steps, longer soaking period and heavier absorption is recommended. Because of the wide variance in available paint formulations, some paints may dry more slowly on wood treated with Water Repellent Penta; because of this no uniformly applicable rules are possible relative to adhesion or drying of finishes.

NOTE -- protective clothing and rubber gloves should be worn when handling freshly treated lumber.

PENTA W
Sunnyside W
tection to
ture, decay,
beetles and
cause black
ing and shr
drawers, wa
ing of board
surface, w
objectionab
frequently
with paint.
In addition

CAUTION!
LEUM DIS
CALL PHY
Keep away
or spray m
thoroughly
flush repea
attention. C
tents to bo
empty cont
or discard i
This produ
lakes, stre
cleaning of
product onl
treated woo
tures where
Protect gra
tact with Pe
Use only wi
KEEP OUT OF

PAINTABLE.
CONTROLS DECAY, WARPING & CHECKING.

ACTIVE INGREDIENTS	
Penta-chlorophenol	4.37%
or Chlorinated Phenols	.51%
Petroleum Hydrocarbons	86.10%
INERT INGREDIENTS	9.02%
	100.00%



EPA Est. 7135-IL-1
EPA Reg No 7135-2

*Equivalent to 5.03% by weight of Technical Pentachlorophenol as defined by Federal Specification TT-W-570

EPA Est. 7135-IL-1
EPA Reg No. 7135-2

depend on
the top quality
of sunnyside

WARNING!
KEEP OUT OF REACH OF CHILDREN.
HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN.
COMBUSTIBLE. SKIN AND EYE IRRITANT.
See other warnings on back panel. Use only as directed.
ONE GALLON [] 3.785 LITERS

depend on
the top quality
of sunnyside

SUNNYS

CUST. SUNNYSIDE	DESIGN 1 GAL PENTA WOOD PRESERVATIVE	NO. PROOFS 10
ENG. 1250-55.0. 246-641	SIZE 4-2x610x907 CE. 4.562x20.400 B.P. 64-201-S	DATE 4-8-75
		PROOF DATE 4-28-75

PENTA
(Water
Repellent)


sunnyside
penta wood
preservative
WATER REPELLENT

ACC - TED
OCT 7 1975
PENTA
(Water
Repellent)
Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
this pesticide is registered under the pesticide
Reg. No. 11122-1

DIRECTIONS

Immerse wood to be treated in Water Repellent Penta for 3 minutes or longer; if dipping is impossible, apply 2 liberal coats by brush or spray, allowing a minimum of one hour between applications. Allow a minimum of 24 hours' drying time prior to painting treated wood. For lumber to be used under severe conditions of exposure as in steps, longer soaking period and heavier absorption is recommended. Because of the wide variance in available paint formulations, some paints may dry more slowly on wood treated with Water Repellent Penta; because of this no uniformly applicable rules are possible relative to adhesion or drying of finishes.

NOTE -- protective clothing and rubber gloves should be worn when handling freshly treated lumber.

PAINTABLE.
CONTROLS DECAY, WARPING & CHECKING.

ACTIVE INGREDIENTS	
Penta-chlorophenol	4.37%*
of Chlorine Phenols	.51%*
Petroleum Hydrocarbons	86.10%
INERT INGREDIENTS	9.02%
	100.00%



*Equivalent to 5.03% by weight of Technical Pentachlorophenol as defined by Federal Specification TT-W 570

EPA Est 7135-IL-1
EPA Reg No 7135-2

EPA Est 7135-IL-1
EPA Reg No 7135-2

depend on
the top quality
of sunnyside

WARNING!
KEEP OUT OF REACH OF CHILDREN.
HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN.
COMBUSTIBLE. SKIN AND EYE IRRITANT.
See other warnings on back panel. Use only as directed

ONE GALLON  3.785 LITERS

depend on
the top quality
of sunnyside

PENTA W

Sunnyside Wa
tection to l
ture, decay,
beetles and
cause black
ing and shri
drawers, war
ing of board
surface, wil
objectionabl
frequently u
with paint,
In addition,

CAUTION! C
LEUM DISTI
CALL PHYS
Keep away f
or spray mist
thoroughly a
flush repeate
attention. Clo
tents to bottl
empty conta
or discard in

This product
lakes, strea
cleaning of
product only
treated wood
tures where
Protect gras
tact with Pe

Use only wit
KEEP OUT OF

SUNNYS

CUST. SUNNYSIDE	DESIGN 1 GAL PENTA WOOD PRESERVATIVE	NO. PROOFS 10
ENG. 1250-55.0. 246-641	SIZE 4-2x610x907 CE. 4.562x20.400 B.P. 64-201-5 DATE 4-9-75	PROOF DATE 4-28-75



sunnyside penta wood preservative WATER REPELLENT

PAINTABLE.

RESISTS ROT, DECAY, WARPING & CHECKING.

ACTIVE INGREDIENTS	
Pentachlorophenol	4.37%
Chlorinated Phenols	.51%
Petroleum Hydrocarbons	85.10%
INERT INGREDIENTS	9.02%
	100.00%



ACCEPTED
OCT 7 1975
PENTA (Water Repellent)
Under the Federal Insecticide, Fungicide, and Rodenticide Act.
Registered under Pesticide Reg. No. 7135-2

DIRECTIONS

Immerse wood to be treated in Water Repellent Penta for 3 minutes or longer; if dipping is impossible, apply 2 liberal coats by brush or spray, allowing a minimum of one hour between applications. Allow a minimum of 24 hours' drying time prior to painting treated wood. For lumber to be used under severe conditions of exposure as in steps, longer soaking period and heavier absorption is recommended. Because of the wide variance in available paint formulations, some paints may dry more slowly on wood treated with Water Repellent Penta; because of this no uniformly applicable rules are possible relative to adhesion or drying of finishes.

NOTE — protective clothing and rubber gloves should be worn when handling freshly treated lumber.

PENTA WOOD PRESERVATIVE (Water Repellent)

Sunnyside Water Repellent Penta offers positive protection to lumber and millwork from damage by moisture, decay, mold and mildew, termites, powder post beetles and other wood-boring insects, and fungi that cause black and blue stain. It greatly reduces swelling and shrinking, sticking of windows, doors and drawers, warping of panels, and distortion and checking of boards. Water Repellent Penta leaves a clean surface, will not leach out, discolor wood or form objectionable crystals on the wood surface. It is frequently used as a prime coat and is compatible with paint, varnish, shellac, enamel or oil stains. In addition, treated wood holds putty securely.

CAUTION! CONTAINS PENTACHLOROPHENOL AND PETROLEUM DISTILLATE. If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY.

Keep away from heat and open flame. Do not breathe vapor or spray mist. Do not get in eyes, on skin, or on clothing. Wash thoroughly after handling. In case of contact with skin or eyes, flush repeatedly with copious amounts of water. Get medical attention. Close container after each use. Do not transfer contents to bottles or other unlabeled containers. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

This product is toxic to fish and wildlife. Keep out of lakes, streams and ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label. Do not use treated wood inside dairy barns, silos or other structures where it may contact food, feed or livestock. Protect grass, leafy plants and vegetation from contact with Penta Wood Preservative (Water Repellent).

Use only with adequate ventilation.

KEEP OUT OF REACH OF CHILDREN.

EPA Est. 7135-IL-1
EPA Reg No. 7135-2

WARNING!

KEEP OUT OF REACH OF CHILDREN.
NOT TO BE SWALLOWED OR ABSORBED THROUGH SKIN.
COMBUSTIBLE. SKIN AND EYE IRRITANT.
See other warnings on back panel. Use only as directed.

ONE GALLON [] 3.785 LITERS

depend on
the top quality
of sunnyside

SUNNYSIDE PRODUCTS, INC.

CONSUMER PRODUCTS DIVISION
CHICAGO, ILLINOIS 60640



CUST. SUNNYSIDE	DESIGN 1 GAL PENTA WOOD PRESERVATIVE	NO. PROOFS 10
ENG. 1250-55.0. 246-641	SIZE 4-2x610x907 CE. 4.562x20.4100 B.P. 64-201-5 DATE 4-8-75	PROOF DATE 4-28-75



sunnyside

penta wood

preservative


WATER REPELLENT

PAINTABLE.
CONTROLS DECAY, WARPING & CHECKING.

ACTIVE INGREDIENTS	
Penta-chlorophenol	4.37%*
2,4-Dichloro-phenols	.51%*
Petroleum Hydrocarbons	86.10%
INERT INGREDIENTS	9.02%
	100.00%



*Equivalent to 5.03% by weight of Technical Pentachlorophenol as defined by Federal Specification TT-W 570

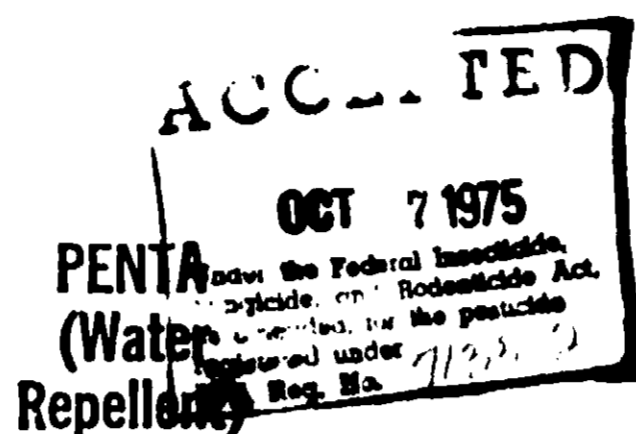

DIRECTIONS

Immerse wood to be treated in Water Repellent Penta for 3 minutes or longer; if dipping is impossible, apply 2 liberal coats by brush or spray, allowing a minimum of one hour between applications. Allow a minimum of 24 hours' drying time prior to painting treated wood. For lumber to be used under severe conditions of exposure as in steps, longer soaking period and heavier absorption is recommended. Because of the wide variance in available paint formulations, some paints may dry more slowly on wood treated with Water Repellent Penta; because of this no uniformly applicable rules are possible relative to adhesion or drying of finishes.

NOTE -- protective clothing and rubber gloves should be worn when handling freshly treated lumber.

EPA Est. 7135-IL-1
EPA Reg. No. 7135-2

PENTA WOOD PRESERVATIVE (Water Repellent)

Sunnyside Water Repellent Penta offers positive protection to lumber and millwork from damage by moisture, decay, mold and mildew, termites, powder post beetles and other wood-boring insects, and fungi that cause black and blue stain. It greatly reduces swelling and shrinking, sticking of windows, doors and drawers, warping of panels, and distortion and checking of boards. Water Repellent Penta leaves a clean surface, will not leach out, discolor wood or form objectionable crystals on the wood surface. It is frequently used as a prime coat and is compatible with paint, varnish, shellac, enamel or oil stains. In addition, treated wood holds putty securely.

CAUTION! CONTAINS PENTACHLOROPHENOL AND PETROLEUM DISTILLATE. If swallowed, do not induce vomiting. **CALL PHYSICIAN IMMEDIATELY.**

Keep away from heat and open flame. Do not breathe vapor or spray mist. Do not get in eyes, on skin, or on clothing. Wash thoroughly after handling. In case of contact with skin or eyes, flush repeatedly with copious amounts of water. Get medical attention. Close container after each use. Do not transfer contents to bottles or other unlabeled containers. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

This product is toxic to fish and wildlife. Keep out of lakes, streams and ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label. Do not use treated wood inside dairy barns, silos or other structures where it may contact food, feed or livestock. Protect grass, leafy plants and vegetation from contact with Penta Wood Preservative (Water Repellent).

Use only with adequate ventilation.

KEEP OUT OF REACH OF CHILDREN.

WARNING!
KEEP OUT OF REACH OF CHILDREN.
HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN.
COMBUSTIBLE. SKIN AND EYE IRRITANT.
See other warnings on back panel. Use only as directed.

ONE GALLON  3.785 LITERS

depend on
the top quality
of sunnyside

SUNNYSIDE PRODUCTS, INC.

CONSUMER PRODUCTS DIVISION
CHICAGO, ILLINOIS 60640



CUST. SUNNYSIDE	DESIGN 1 GAL PENTA WOOD PRESERVATIVE	NO. PROOFS 10
ENG. 1250-55.0. 246-641	SIZE 4-2x610x907 C.E. 4.562x20.400 B.P. 64-221-5 DATE 4-8-75	PROOF DATE 4-28-75