


REFINED
CREOSOTE
OIL

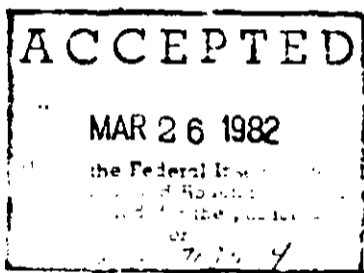

sunnyside

REFINED

creosote

oil

WOOD PRESERVATIVE
FUNGICIDE & INSECTICIDE
WOOD STAIN

ACTIVE INGREDIENTS 100%
Refined Creosote Oil 100%

REFINED
CREOSOTE
OIL

Directions: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. Protective clothing and rubber gloves should be worn when applying creosote or when handling freshly treated lumber. Creosote can quickly cause severe sunburns, particularly in the presence of sunlight. Apply only by brushing or spraying. Do not spray.

Wood Protection: Wood should be peeled, decay free, dry and seasoned. Soak construction lumber in creosote for at least 3 minutes per inch of thickness. Fence posts are best treated by full length coverage for full treatment. Seal 24 hours and seal with 12 inches of 1/2 inch wood extending above ground level.

On existing structures, creosote controls fungus, rot and decay only. Apply liberally with brush, allow to dry, then repeat treatment. When treated lumber is cut, apply 2 coats of creosote to the exposed untreated wood. Never use as board or other structural material over treated wood unless absolutely dry.

Refined CREOSOTE OIL. Sunnyside Creosote kills termites, carpenter ants and powder post beetle. Cleopboard and shingles creosote produces a protective surface against decay, warping, checking. Creosote is not for interior use and should not be finished or planned after treatment. Use Sunnyside rather than Creosote.

CAUTION: CONTAINS COAL TAR (away from heat and open flame). Avoid Do not get in eyes, on skin, or on clothing after handling.

FIRST AID: If swallowed, do not induce vomiting. Call a physician immediately. In case of contact with water and get medical contact, wash thoroughly.

ENVIRONMENTAL HAZARDS: This product is harmful to humans, fish and wildlife. Keep out of ponds. Do not contaminate water equipment or disposal of wastes. Only as specified on this label. Do not use inside dairy barns, silos or other structures. Contact food, feed or livestock. Prohibit plants and vegetation from contact with treated wood.

STORAGE AND DISPOSAL: Close each use. Do not transfer contents to other containers. Do not reuse empty container and put in trash collection.

Use only with adequate ventilation. KEEP OUT OF REACH OF CHILDREN

EPA Est. 7136 A-1
EPA Reg. No. 7136-9

depend on
the top quality
of sunnyside

CAUTION!
KEEP OUT OF REACH OF CHILDREN
HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN
COMBUSTIBLE, SKIN AND EYE IRRITANT
See other warnings on back panel. Use only as directed.

ONE GALLON □ 3.785 LITERS

depend on
the top quality
of sunnyside

SUNNYSIDE CORPORATION
CONSUMER PRODUCTS
WHEELING, ILLINOIS

Product: SUNNYSIDE Creosote Oil



sunnyside

REFINED

creosote
oil

WOOD PRESERVATIVE
FUNGICIDE & INSECTICIDE
WOOD STAIN

ACTIVE INGREDIENTS 13.0%
Refined Creosote Oil 100%

**REFINED
CREOSOTE
OIL**

Directions: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. Protective clothing and rubber gloves should be worn when applying creosote or when handling freshly treated lumber. Creosote can quickly cause severe sun burns, particularly in the presence of sunlight. Apply only by brushing or spraying. Do not spray.

Wood Protection: Wood should be peeled, decay free, dry and seasoned. Seal construction lumber in creosote for at least 3 minutes per inch of thickness. Fence posts are best treated by full length coverage, for but treatment wait 24 hours and seal with 12 inches of treated wood extending above ground level.

On existing structures, creosote controls fungus rot and decay only. A dry-brush only with brush, allow to dry the wood. Repeat treatment. When treated lumber is cut, apply 2 coats of creosote to the exposed untreated wood. Never put a board or other untreated material in contact with wood unless absolutely dry.

Refined CREOSOTE OIL: Sunnyside Creosote protects against fungi, termites, carpenter ants and powder post beetles. When used on siding, clapboard and shingles, creosote produces a light brown stain and protects against decay, warping, checking, swelling and sharring. Creosote is not for interior use and should not be painted over. If further finishing is planned after treatment, use Sunnyside Penix Water Repellent rather than Creosote.

CAUTION, CONTAINS COAL TAR CREOSOTE: Keep away from heat and open flame. Avoid breathing vapor. Do not get in eyes, on skin, or on clothing. Wash thoroughly after handling.

FIRST AID: If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. In case of eye contact, flush thoroughly with water and get medical attention. For skin contact, wash thoroughly.

ENVIRONMENTAL HAZARDS: This product is toxic to humans, fish and wildlife. Keep out of lakes, streams and ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label. Do not use treated wood inside dairy barns, silos or other structures where it may contact food, feed or livestock. Protect grass, leafy plants and vegetation from contact with creosote.

STORAGE AND DISPOSAL: Close container after each use. Do not transfer contents to unlabeled containers. Do not reuse empty container. Wrap container and put in trash collection.

Use only with adequate ventilation
KEEP OUT OF REACH OF CHILDREN

CAUTION!
KEEP OUT OF REACH OF CHILDREN
HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN
COMBUSTIBLE, SKIN AND EYE IRRITANT
See other warnings on back panel. Use only as directed.

ONE GALLON □ 3.785 LITERS

depend on
the top quality
of sunnyside

SUNNYSIDE CORPORATION
CONSUMER PRODUCTS DIVISION
WHEELING, ILLINOIS 60090



SUNNYSIDE CREOSOTE OIL