

**NET  
CONTENTS**

# PENWAR 1-5

**GALLONS**

## DIRECTIONS FOR MIXING

Agitate contents of this container before diluting. To prepare a ready-to-use solution of a water repellent wood preservative mix one (1) gallon of PENWAR CONCENTRATE (1-5) with five (5) gallons of Mineral Spirits, Fed. Spec. TT-T-291—Thinner, Paint, Volatile Mineral Spirits Solutions, mixed as recommended above, will comply with Fed. Spec. TT-W-572 for Wood Preservative, Water Repellent Composition A.

## DIRECTIONS FOR USE

Best results would be obtained by using wood pressure-treated with our product PENWAR. In lieu of that next best results will be obtained by immersing wood to be treated in PENWAR for 3 minutes minimum plus three minutes for each inch of thickness. Where dipping is not possible two or more liberal brush or spray applications should be made. Rewet wood surface with Penwar immediately after application to give high retentions and better penetration. Allow at least 24 hours and preferably longer before application of varnish or paint. Brush, spray or dip to obtain maximum absorption on cut surfaces.

## CAUTION

Harmful if swallowed or absorbed through skin. Causes irritation of skin or eyes. Do not breathe vapor or spray mist. Do not get in eyes, on skin or on clothing. In case of contact, wash immediately with soap and water, for eyes flush with water and get medical attention. If swallowed induce vomiting by administering an emetic—call a physician.

**Avoid contamination of feed or foodstuffs. Do not use on household pets or livestock.**

**FLAMMABLE: Keep away from fire.**

USDA REG. NO. 7234-16

## WOOD PRESERVATIVE CONCENTRATE

**CLEAR-WATER REPELLENT—PAINTABLE  
PREVENTS ROT, TERMITES - POWDER POST BEETLES  
CONTROLS SWELLING - WARPING**

### ACTIVE INGREDIENTS:

Pentachlorophenol\* 22.53%

Other Chlorinated Phenols\* 2.05%

### INERT INGREDIENTS:

Total

100.00%

\*Equivalent to 25.6% Technical Pentachlorophenol as manufactured complying to Federal Specifications TT-W-570-a

**ACCEPTED**

*Oct-13-1967*

UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
FOR ECONOMIC POISON REGISTERED  
UNDER NO. 7234-16

## RECOMMENDED FOR USE ON


Wood in exterior or interior locations or any uses where subject to decay and insect attack. For use on wood in place. For use on millwork, sash, exterior doors, furniture, flooring, boat hulls, pallets, eaves, fascia, shingles, siding, plywood and signs. Also on boxes, crates, lawn furniture, trellises, window frames. Use on cut surfaces of pressure treated lumber.

For protection against subterranean termites treat wood prior to placement in construction.

In addition to preventing decay, sap stain and insect attacks on lumber and plywood PENWAR assists in giving wood dimensional stability by repelling free water and by controlling shrinking, swelling, grain-raising, warping and checking.

NOTICE—Neither the manufacturer nor the seller makes any representation or warranty express or implied, concerning this material except that it is of the manufacturer's standard quality. Neither shall be held responsible in any manner for any personal injury or property damage or other type of loss resulting from the handling, storage or use of this material. The buyer accepts and uses this material on these conditions.

**WARNING: KEEP OUT OF REACH OF CHILDREN  
(SEE OTHER WARNINGS ON BACK PANEL)**

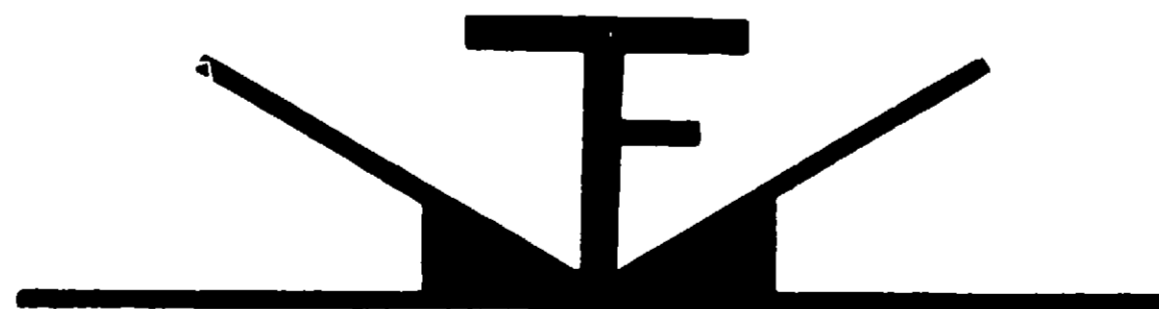

ANOTHER FINE PRODUCT OF

**FORSHAW CHEMICALS, INC.**

P. O. BOX 6055

CHARLOTTE, N. C. 28207

## WARNING

**Keep out of reach of children.**

Do not reuse empty container.

Destroy it by perforating or

crushing. Bury or discard in

a safe place.