

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN - Center Panel

1 GALLON U.S. - 6030000-3

1087
Panel 1

Fig # 7-12-1

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN

PRESERVES WOOD BEAUTIFULLY

OLYMPIC®

SEMI-TRANSPARENT


WEATHER SCREEN™

PRESERVATIVE

OIL STAIN

REPELS WATER AND PRESERVES WOOD, LETS COLOR

AND GRAIN SHOW - FOR WOOD SIDING, DECKS AND FENCES

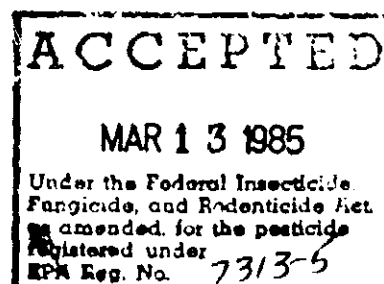

KEEP OUT OR REACH OF CHILDREN

WARNING

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

1 GALLON - 3.785 LITERS

ACTIVE INGREDIENTS

Bis (tributyltin)oxide.0.50%


Folpet [N-[(trichloromethyl)thio]phthalimide]0.50%

INERT INGREDIENTS.99.00%

TOTAL. . .100.00%

MEETS FED.SPEC.TT-W-572B 3.7

EPA Reg.No.7313-5 EPA Est.No.7313-WA-1,7313-IL-1,7313-KY-1

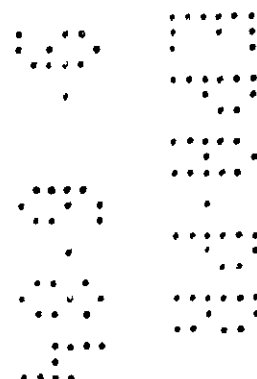

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN - Right (of center) Panel

1 GALLON U.S. - 6030000-3

DIRECTIONS FOR USE

Apply this product only as specified on this label. It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Olympic® Preservative Oil Stain is a penetrating, semi-transparent stain with WEATHER SCREEN™ additives to repel water and preserve wood. OLYMPIC® Preservative Oil Stain exceeds the Federal specification for water repellency, TT-W-572B Paragraph 3.7.

USE ONLY ON EXTERIOR SURFACES. Use on wood decks, fences and sidings which may be exposed to attack by wood rot, mildew or excess moisture. It can be used on both new wood and over previously stained semi-transparent surfaces. OLYMPIC® Preservative Oil Stain preserves wood. To maintain wood preservation properties, reapplications may be required within 3 to 5 years.

One coat is normally satisfactory for redo or new applications to rough wood. Ideally, the wood should be dry and absorbent for maximum performance. A sample brushout is always recommended to determine the actual color result. For wood at or below ground level or in contact with water use OLYMPIC® Wood Preservative Green. To protect and preserve wood before painting or on structural lumber, timbers, millwork or roofs use OLYMPIC® Wood Preservative Clear. For severe exposure to wood rot, "pressure treated wood" offers maximum protection.

SURFACE PREPARATION: Proper surface preparation is important for

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN - Right Panel, Continued

1 GALLON U.S. - 6030000-3

satisfactory results. All surfaces must be clean, dry and free of mildew. Remove all dirt, dust, oil, soot or other contaminants by washing with a detergent solution. Rinse thoroughly and allow to dry completely before staining.

Remove grade stamps, pencil marks, etc., by sanding. Remove mildew by scrubbing the surface with this solution: 1 cup non-ammoniated detergent and 1 quart household bleach dissolved into 3 quarts water. (CAUTION: Household bleach is a potentially harmful material. Follow manufacturer's precautions. Use protective clothing, eye goggles and good rubber gloves.) Rinse thoroughly with clear water and immediately apply a solution of 50% household bleach and 50% water. Rinse and allow this final treatment to dry before staining.

STAIN PREPARATION: THOROUGH MIXING IS ESSENTIAL. Pour top oils into another can and stir the remaining pigment thoroughly. Pour the oil back into the can and mix. Pour from one can to another several times to ensure the pigments are mixed. When using more than one container, use only two-thirds of one can and then intermix with stain from the next can to assure an equal balance of pigment and oil. STIR REGULARLY DURING USE. DO NOT THIN.

EXTRACTIVE BLEEDING: Some woods contain water soluble colorings or extractives that tend to "bleed" to the surface. This bleeding may be unsightly but is not damaging the finish. If it has occurred, allow the coating to dry completely, then wash with a mild detergent solution and rinse with clear water.

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN - Right Panel, Continued

1 GALLON U.S. - 6030000-3

APPLICATION: OLYMPIC® Preservative Oil Stain is best applied with a natural bristle brush. Thoroughly stain ends and edges of boards. To help avoid lap marks, stain only a few boards at a time, working from top to bottom or from side to side keeping the leading edge "wet". Roller application should be limited to rough surfaces. Application by dipping (3 to 5 minutes) is suggested but material must be separated while drying.

FOR ADDITIONAL INFORMATION - ASK YOUR DEALER

603000-3

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN - Left Panel

1 GALLON U.S. - 6030000-3

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND

DOMESTIC ANIMALS

KEEP OUT OF REACH OF CHILDREN

WARNING: HARMFUL OR FATAL IF SWALLOWED. CAUSES EYE AND SKIN IRRITATION.

Use only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes, or on skin or clothing. Wear rubber gloves and protective clothing when applying or handling freshly treated lumber. Do not drink alcohol while working with product.

FIRST AID: If on skin, wash with soap and water. Remove and wash contaminated clothing before reuse. If in eyes, immediately flood with water for at least 15 minutes. Call a physician. If swallowed, do not induce vomiting. Call a physician. If nausea or dizziness occurs, get fresh air and do not operate machinery or climb ladders.

ENVIRONMENTAL HAZARDS: This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of waste.

PHYSICAL OR CHEMICAL HAZARDS: To avoid spontaneous combustion, soak oily cloths in water after use or place in a closed metal container away from buildings and other combustible materials. COMBUSTIBLE. Do not use or store near heat or open flame.

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN - Left Panel, Continued

1 GALLON U.S. - 6030000-3

STORAGE AND DISPOSAL: Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection. Keep away from food and feed.

APPROXIMATE COVERAGE: On rough wood, 150 square feet per gallon; smooth wood, 250 square feet per gallon.

DRYING: OLYMPIC® Preservative Oil Stain will require 24 to 48 hours to dry under ideal conditions.

CLEANUP: Clean brushes and other tools with mineral spirits.

LIMITED WARRANTY: The manufacturer will refund the purchase price or replace this product if, within one year of the date of purchase, it is shown to be defective. No other express warranties are given.

Manufacturer's liability under any warranty, whether express or implied, is limited solely to the replacement of the product or refund of the purchase price at manufacturer's option. Labor or other consequential damages are not covered.

Some states do not allow limitations or exclusions on incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

OLYMPIC SEMI-TRANSPARENT WEATHER SCREEN - Left Panel, Continued
1 GALLON U.S. - 6030000-3

OLYMPIC HOME CARE PRODUCTS COMPANY
2233 112th Ave. N.E., Bellevue, WA 98004

MADE IN U.S.A.

©1984 OLYMPIC HOME CARE PRODUCTS COMPANY