

**VERSION 2**  
**FRONT PANEL**

"OLYMPIC STOPS THE RAIN <sup>TM</sup>" Copy and Rainbow Artwork

**OLYMPIC (R)**

**WOOD  
PRESERVATIVE  
CLEAR**

- o WATER REPELLENT
- o SUNBLOCK (R) UV PROTECTION
- o WOOD PRESERVATIVE TO  
FIGHT MILDEW AND ROT
- o NATURAL LINSEED OIL FORMULA
- o FOR EXTERIOR ABOVE GROUND USE

One Gallon / 3.78 Liters

and

Five Gallon / 18.9 Liters

KEEP OUT OF REACH OF CHILDREN (12 pt.)  
DANGER! (18 pt.) MAY BE FATAL IF SWALLOWED. COMBUSTIBLE. SEE  
BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS. (12 pt.)

**ACTIVE INGREDIENTS**


Bis (tributyltin) oxide.....	0.50%
Folpet [N-(trichloromethylthio) phthalimide].....	0.50%
INERT INGREDIENTS.....	99.00%

**TOTAL 100.00%**

Contains petroleum distillates.

MEETS FED. SPEC TT-W-5728 3.7

EPA Reg. No. 7313-6 EPA Est. No. 7313-WA-1, 7131-IL-1, 7313-KY-1

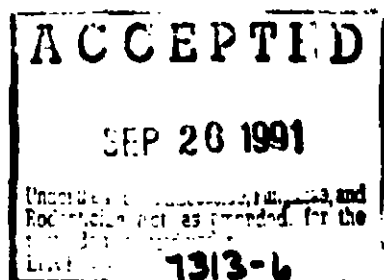

**BEST AVAILABLE COPY**

2 of 6

LEFT SIDE PANEL

LIMITED WARRANTY

OLYMPIC warrants your satisfaction with the application, appearance and performance properties of this product if it is properly applied to a properly prepared surface in accordance with label directions. OLYMPIC MAKES NO OTHER EXPRESS WARRANTIES. IN THE EVENT THE PRODUCT FAILS TO CONFORM TO THIS WARRANTY, OLYMPIC, AS ITS SOLE LIABILITY AND IN LIEU OF ANY DIRECT OR INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES, WILL, AT YOUR OPTION, FURNISH REPLACEMENT PRODUCT OR REFUND THE PURCHASE PRICE - LABOR OR COSTS OF LABOR FOR THE APPLICATION OF ANY PRODUCT SPECIFICALLY ARE EXCLUDED. You must supply proof of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. To make a claim under this warranty contact the store where you purchased the product or: OLYMPIC STAINS, One PPG Place, Pittsburgh, PA 15272.

RIGHT SIDE PANEL

For 51787 imprints:

UPC Code: One Gallon: 7 15195 17871 6  
Five Gallon: 7 15195 17875 4

For 55587 imprints:

MAXIMUM VOC = 350 g/l (2.92 lbs/gal)

Calc. VOC = 332 g/l (2.77 lbs/gal)

UPC Code: One Gallon: 7 15195 55871 6  
Five Gallon: 7 15195 55875 4

DIST. BY AND (C) 1990  
PPG ARCHITECTURAL FINISHES, INC.  
ONE PPG PLACE  
PITTSBURGH, PA 15272  
(412) 434-3131  
MADE IN U.S.A.

**BACK PANEL**

**NOTE:** The following label warning should appear in a box with rounded corners at the top of the back panel.

**(12 pt.) PRECAUTIONARY STATEMENTS -- HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER (18 pt.)**

**(All headings in 12 pt. type)**

May be fatal if swallowed. Causes eye and skin irritation. Avoid breathing vapor or spray mist. Do not get in eyes, on skin, or on clothing. Note: Wear goggles, rubber gloves, and protective clothing when applying or handling treated lumber. Remove contaminated clothing and wash before reuse.

**ENVIRONMENTAL HAZARDS:** Keep out of lakes, ponds or streams. Do not contaminate water when disposing of equipment washwaters.

**PHYSICAL/CHEMICAL HAZARDS:** Combustible. Keep away from heat, sparks or flame. Use with forced ventilation. Do not take internally. Close container after each use.

**IMPORTANT:** Spray equipment must be handled with due care and in accordance with manufacturer's recommendations. Spraying of any material can be hazardous. Wear respirator, eye protection, and protective clothing.

**STATEMENT OF PRACTICAL TREATMENT**

**IF SWALLOWED:** Do not induce vomiting. Drink large quantities of water and call a physician immediately.

**IF ON SKIN:** Wash with plenty of soap and water. Get medical attention if irritation persists.

**IF IN EYES:** Flush eyes with plenty of water, get medical attention.

**IF INHALED:** Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

For Emergency Medical and Spill Control Information, (304) 843-1300.

## OLYMPIC (R) WOOD PRESERVATIVE CLEAR

### Penetrating, Water Repellent Finish

- o Protects against costly water damage.
- o Helps block the sun's harmful ultra violet rays.
- o Preserves wood while helping maintain its natural beauty.
- o Penetrates deep into the wood to strengthen wood fibers.

### DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Apply this product only as specified on this label.

OLYMPIC (R) WOOD PRESERVATIVE CLEAR is a penetrating linseed oil base, water repellent wood preservative. It gives wood protection from rot, decay, mildew, ultra violet light, and moisture damage. Recommended only for EXTERIOR above ground use, it also adds these protective qualities when used under finish coats, resulting in longer life for the wood and the finish. It may also be used on pressure treated wood to protect the wood from water damage, mildew and deterioration due to ultra violet sunlight. It exceeds the Federal specification for water repellency, TT-W-572B, paragraph 3.7.

WOOD PRESERVATIVE CLEAR is recommended on exterior bare wood surfaces which may be exposed to attack by wood rot, mildew or excess moisture. Use on structural lumber, beams, timbers, sills, millwork and roofs. To maintain wood preservation properties, reapplications are recommended every 2 to 4 years.

When used prior to painting or staining, allow to dry thoroughly (at least 24 to 48 hours) before applying OLYMPIC (R) Stain or Primecoat. (TM) Applications of oil base top coats may result in a higher gloss in some areas which will normally become more uniform with weathering.

Surfaces treated with WOOD PRESERVATIVE CLEAR will be protected from moisture damage, mildew and rot, but will "weather" naturally. Depending on the exposure and the type of wood, this weathering will include a gradual graying. To protect and beautify with color, use one of OLYMPIC'S (R) Semi-Transparent or Solid Color Stains. For severe exposure to wood rot, "pressure treated wood" offers maximum protection. Wood used below ground requires OLYMPIC (R) Wood Preservative Green.

## PREPARATION

**SURFACE PREPARATION:** Proper surface preparation is essential for Olympic Stain's limited warranty to apply. Surfaces must be clean, dry and free of mildew. Rinse thoroughly and allow to dry before application.

**MILDEW:** Remove and inhibit regrowth of mildew by using MILDEW CHECK (R) Multi-Purpose Wash by OLYMPIC STAIN.

## APPLICATION

Mix thoroughly prior to use. May be applied with a natural bristle brush, spray or by dipping. Use only one thin coat. Thoroughly treat ends and edges of boards. DO NOT THIN.

**APPROXIMATE COVERAGE:** Depending on texture, porosity and dryness of wood: 150 to 250 square feet per gallon.

**TEMPERATURE RECOMMENDATIONS:** Avoid application to a hot surface in direct sunlight. Do not apply when the air, coating or surface temperature is below 50°F (10°C).

**DRYING:** WOOD PRESERVATIVE CLEAR will require 24 to 48 hours to dry under ideal conditions.

**CLEANUP:** Clean brushes and other tools with mineral spirits.

**EXTRACTIVE BLEEDING:** Some woods contain water-soluble colorings or extractives that tend to "blend" to the surface. This bleeding may be unsightly but is not damaging to the finish. If it has occurred, allow the coating to dry, then wash with a mild detergent solution and rinse with clear water. For stubborn stains, a second solution of 50% alcohol and 50% water may be necessary.

**STORAGE AND DISPOSAL:** Securely wrap original container in several layers of newspaper and discard in trash. Do not reuse container. Rinse thoroughly before discarding in trash.

**FOR ADDITIONAL INFORMATION - ASK YOUR DEALER OR REFER TO THE OLYMPIC INFORMATION MANUAL.**

Label Date Code: (15091)