

EPA MASTER LABEL COPY**FRONT PANEL:****OLYMPIC® CLEAR WOOD PRESERVATIVE**

**PROVIDES WATERGUARD® WATERPROOFING PROTECTION
SUNBLOCK® U.V. PROTECTION**

PROTECTS WOOD BEAUTIFULLY

The 5-Way Wood Protector

1. Repels Water
2. Resists Sun Damage
3. Mildew Resistant
4. Penetrating Linseed Oil
5. Fights Rot & Decay

**KEEP OUT OF REACH OF CHILDREN
CAUTION**

**Harmful if swallowed. Combustible.
See back panel for additional precautionary statements.**

ACTIVE INGREDIENTS:

Bis (Tributyltin) oxide 0.5%

Folpet [N-(trichloromethylthio) phthalimide] 0.5%

OTHER INGREDIENTS: 99.0%

Contains petroleum distillates

MEETS FED. SPEC TT-W-572B 3.7


EPA Reg. No. 7313-6

EPA Est. No. 7313-KY-1

One Gallon / 3.78 Liters


Five Gallons / 18.9 Liters

[10/01/04 pending EPA update, approved xxx]

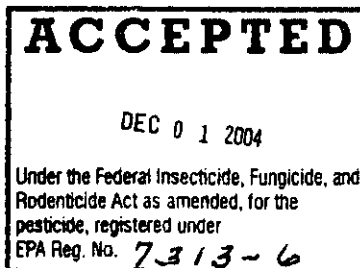

BACK/SIDE PANELS:**OLYMPIC® CLEAR WOOD PRESERVATIVE**

- Protects Against Costly Water Damage
- Protects Against Harmful Sun Damage
- Fights Unsightly Mildew Growth
- Linseed Oil Penetrates Deep to Strengthen Wood Fibers
- Preserves Wood While Helping to Maintain its Natural Beauty

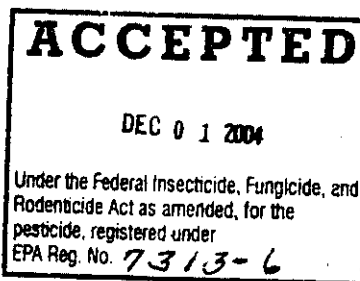

Provides a clear finish to protect the natural beauty of your wood while allowing it to weather gray naturally. Premium penetrating Linseed Oil and a wood preservative protects your wood from rot and decay.

FIRST AID: If swallowed, immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person. **If on skin or clothing,** take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice. **If in eyes,** hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice. **If inhaled,** move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice. **Note to physician,** Contains petroleum distillate – vomiting may cause aspiration pneumonia. **Contact 1-412-434-4515 or your poison control center for 24-hour emergency medical treatment information. Have the product container or label with you when calling a poison control center or doctor, or going for treatment.**

PRECAUTIONARY STATEMENTS -
HAZARDS TO HUMANS AND DOMESTIC ANIMALS -

CAUTION - Causes moderate eye irritation. Avoid contact with eyes, skin or clothing.

PERSONAL PROTECTIVE EQUIPMENT (PPE): Wear long sleeved shirt, long pants, shoes, and socks when handling or applying this product.

USER SAFETY RECOMMENDATIONS: Users should: Wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Remove clothing immediately after handling or if product gets inside. Wash clothing thoroughly and as soon as possible after use.

IMPORTANT: Spray equipment must be handled with due care and in accordance with manufacturer's recommendations. Spraying of any material can be hazardous. Wear respirator, eye protection, and protective clothing.

ENVIRONMENTAL HAZARDS: This chemical is highly toxic to fish and other aquatic organisms. Do not apply directly to water. Do not contaminate water when disposing of equipment, washwater, or rinsate.

PHYSICAL/CHEMICAL HAZARDS: Combustible. Combustible materials contaminated with overspray or liquid residues of this product may undergo spontaneous combustion. To minimize the potential for spontaneous combustion, soak contaminated materials with water or place them in a closed metal container away from buildings and other combustible materials. Keep away from heat, sparks or flame. Use with adequate, forced ventilation. Do not swallow. Close container after each use.

STORAGE AND DISPOSAL: Securely wrap original container in several layers of newspaper and discard in trash. Do not reuse container. Rinse thoroughly before discarding in trash.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Apply this product only as specified on this label. Do not apply this product in a way that it will contact any person or pet. Do not allow this product to drift. Wear goggles or face shield when handling. Remove contaminated clothing and separately launder clothing before reuse. Wash thoroughly with soap and water after handling.


This product is a penetrating linseed oil base, water repellent wood preservative. It gives wood protection from rot, decay, mildew, ultra violet light, and moisture damage. Recommended only for exterior above ground use, it also adds these protective qualities when used under finish coats, resulting in longer life for the wood and the finish. It may also be used on pressure treated wood to protect the wood from water damage, mildew and deterioration due to ultra violet sunlight. It exceeds the Federal specification for water repellency, TT-W-572B, paragraph 3.7.

This product is recommended on exterior bare wood surfaces that may be exposed to attack by wood rot, mildew or excess moisture. Use on structural lumber, beams, timbers, sills, millwork and roofs. To maintain wood preservation properties, reapplications are recommended every 2 to 4 years. When used prior to painting or staining, allow to dry thoroughly (at least 24 to 48 hours) before applying Stain. Applications of oil base topcoats may result in a higher gloss in some areas which will normally become more uniform with weathering.

Surfaces treated with this product will be protected from moisture damage, mildew and rot, but will "weather" naturally. Depending on the exposure and the type of wood, this weathering will include a gradual graying. To protect and beautify with color, use one of the Semi-Transparent or Solid Color Stains. For severe exposure to wood rot, "pressure treated wood" offers maximum protection.

PREPARATION: Surface Preparation: Proper surface preparation is essential for the limited warranty to apply. Surfaces must be clean, dry and free of mildew. Rinse thoroughly and allow to dry before application. Mildew: Remove mildew by washing with a mixture of 1 part liquid chlorine bleach to 3 parts water. Rinse thoroughly.

APPLICATION: Mix thoroughly prior to use. May be applied with a natural bristle brush, spray or by dipping. Use only one thin coat. Thoroughly treat ends and edges of boards. **DO NOT THIN.** Approximate Coverage: Depending on texture, porosity and dryness of wood: 150 to 250 square feet per gallon. Temperature Recommendations: Avoid application to a hot surface in direct sunlight. Do not apply when the air, coating or surface temperature is below 50°F (10°C). Drying: This product will require 24 to 48 hours to dry under ideal conditions. Cleanup: Clean brushes and other tools with mineral spirits. **DANGER** – Rags, steel wool or waste soaked with this product may spontaneously catch fire if improperly discarded. Immediately after use, place rags, steel wool or waste in a sealed water-filled metal container. Place closed metal container away from buildings and other combustible materials. Extractive Bleeding: some woods contain water-soluble colorings or extractives that tend to "bleed" to the surface. This bleeding may be unsightly but is not damaging to the finish. If it has occurred, allow the coating to dry, then wash with a mild detergent solution and rinse with clear water. For stubborn stains, a second solution of 50% alcohol and 50% water may be necessary.

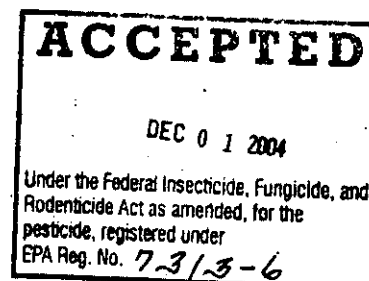

PPG warrants your satisfaction with the application, appearance and performance properties of this product if it is properly applied to a properly prepared surface in accordance with label directions. PPG MAKES NO OTHER EXPRESS WARRANTIES. IN THE EVENT THE PRODUCT FAILS TO CONFORM TO THIS WARRANTY, PPG, AS ITS SOLE LIABILITY AND IN LIEU OF ANY DIRECT OR INDIRECT INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES, WILL, AT YOUR OPTION, FURNISH REPLACEMENT PRODUCT OR REFUND THE PURCHASE PRICE - LABOR OR COSTS OF LABOR FOR THE APPLICATION OF ANY PRODUCT SPECIFICALLY ARE EXCLUDED. You must supply proof of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. To make a claim under this warranty contact the store where you purchased the product or: PPG Architectural Finishes, Inc., One PPG Place, Pittsburgh, PA 15272.

For 51787 imprints:

UPC Code: One Gallon: 7 15195 17871 6
Five Gallon: 7 15195 17875 4

For 55587 imprints:

UPC Code: One Gallon: 7 15195 55871 6
Five Gallon: 7 15195 55875 4

MAX VOC = 350 g/L (2.92 lbs/gal)

Calc. VOC = 332 g/L (2.77 lbs/gal)

For 57587 imprints:

UPC Code: One Gallon: 7 15195 57871 0
Five Gallon: 7 15195 57875 8

MAX VOC = 550 g/L (4.58 lbs/gal)

Calc. VOC = 548 g/L (4.57 lbs/gal)

For 41-5001 imprints:

UPC Code: One Gallon: 0 88625 04334 3
Five Gallon: 0 88625 04333 6

MAX VOC = 550 g/L (4.58 lbs/gal)

Calc. VOC = 548 g/L (4.57 lbs/gal)

ACCEPTED

DEC 01 2004

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 7313-6

FOR ADDITIONAL INFORMATION - ASK YOUR DEALER OR REFER TO THE INFORMATION MANUAL.

Mfg. By and © 1993 & 2004
PPG Architectural Finishes, Inc.
One PPG Place
Pittsburgh, PA 15272
412-434-4515
Made in U.S.A.