



**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS**

WARNING!
**HARMFUL OR FATAL IF SWALLOWED
OR ABSORBED THROUGH SKIN.
CAUSES EYE AND SKIN IRRITATION.**

Use only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes or on skin or clothing. Wear rubber gloves and protective clothing when applying or handling freshly treated lumber.

FIRST AID: If on skin, wash with soap and water. Remove and wash contaminated clothing before reuse. If in eyes, immediately flood with water for at least 15 minutes. Call a physician. If swallowed, do not induce vomiting. Call a physician.

ENVIRONMENTAL HAZARDS: This product is toxic to fish and wildlife. Do not apply directly to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste.

PHYSICAL OR CHEMICAL HAZARDS: To avoid spontaneous combustion, soak oily cloths in water after use or place in a closed metal container away from buildings and other combustible materials. **COMBUSTIBLE.** Do not use or store near heat or open flame.

STORAGE AND DISPOSAL: Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection. Keep away from food and feed.


APPROXIMATE COVERAGE: On rough wood, 150 square feet per gallon. Smooth wood, 250 square feet per gallon.

DRYING: Weather Screen will require 24 to 48 hours to dry under ideal conditions.

CLEAN UP: Clean brushes and other tools with mineral spirits.

LIMITED WARRANTY: The manufacturer will refund the purchase price or replace this product if, within one year of the date of purchase, it is shown to be defective. No other express warranties are given. **MANUFACTURER'S LIABILITY UNDER ANY WARRANTY, WHETHER EXPRESS OR IMPLIED, IS LIMITED SOLELY TO REPLACEMENT OF THE PRODUCT OR REFUND OF THE PURCHASE PRICE AT MANUFACTURER'S OPTION AND DOES NOT INCLUDE LABOR OR OTHER CONSEQUENTIAL DAMAGES.**

OLYMPIC STAIN
A division of COMERCO, INC.
20341 12th Ave. NE, Bellevue, WA 98004
MADE IN U.S.A.

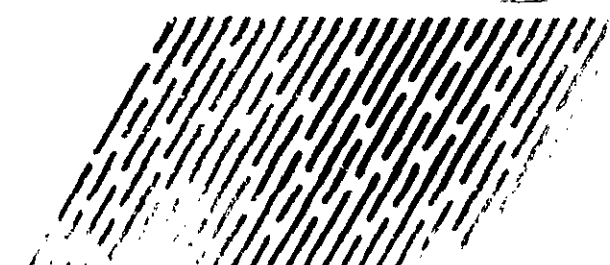

PRESERVES WOOD BEAUTIFUL

OLYM

**WEATH
SCREE**

STAIN AND WOOD PR

WARNING: KEEP OUT OF REACH OF CHILDREN
SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENT.

1 GALLON 3.785 LITERS

ACT
RIS
100
INF
MET
FPA



WOOD BEAUTIFULLY
OLYMPIC

**WEATHER
SCREEN** SOLID
COLOR

WOOD PRESERVATIVE

OF CHILDREN
RY STATEMENT
5 LITERS

ACTIVE INGREDIENTS
Bis (tributyltin) oxide 0.50%
Folpet M (trichloromethyl) thio phthalimide 0.50%
INERT INGREDIENTS 99.00%
TOTAL 100.00%
MEETS FED. SPEC. TT-W-572-B3 /
EPA Reg. No. 7313-8 EPA Est. No. 7313-WA-1 7313-IL-1 7313-KY-1

WEATHER
SCREEN
1988
Folpet M
Bis (tributyltin) oxide

DIRECTIONS FOR USE

Apply this product only as specified on this label. It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Olympic Weather Screen is a penetrating linseed oil base and water repellent solid color stain and wood preservative. Weather Screen contains both TBTO, a wood preservative, and FOLPET, a mildewicide and fungicide. Weather Screen is registered with the Environmental Protection Agency and exceeds the Federal specification for water repellency TT-W-572-B paragraph 3.7.

Weather Screen is recommended for exterior above ground use on bare redwood, cedar, mahogany and Douglas fir which may be exposed to attack by wood rot, mildew or excess moisture. Apply Weather Screen to wood siding, shakes, shingles, fascia trim and fences. For solid color stain application to Southern Yellow Pine, two coats of Olympic Acrylic Latex stain are recommended. Where a solid color finish is desired when recoating, use Olympic Latex Solid Color Stain or Olympic Overcoat.

DO NOT USE ON HORIZONTAL SURFACES SUCH AS DECKS, PORCHES, RAILINGS, STEPS, PATIOS OR OUTDOOR FURNITURE. Use Weather Screen Semi-Transparent Stain on horizontal surfaces. To protect and preserve wood before painting or on structural lumber, timbers, millwork or roofs use Olympic Wood Preservative Clear. Use Olympic Wood Preservative Green on wood used below ground or in contact with water. For severe exposure to wood rot, pressure treated wood offers maximum protection.

SURFACE PREPARATION: All surfaces must be clean, dry and free of mildew. Remove all dirt, dust, oil, soot or other contaminants by washing with a detergent solution. Rinse thoroughly and allow to dry completely before staining. Where mildew is evident, remove it by scrubbing the surface with this solution: 1 cup Trisodium Phosphate (TSP) or other detergent and 1 quart of household bleach dissolved into 3 quarts water. (NOTE TO USER: TSP and household bleach are potentially harmful materials. Follow manufacturer's precautions. Use protective clothing, eye goggles and good rubber gloves.) Rinse thoroughly with fresh water and immediately apply a solution of 50% household bleach and 50% water. Allow this final treatment to dry before staining.

STAIN PREPARATION: Thorough mixing is essential. Pour top oils into another can and stir the remaining pigment thoroughly. Pour the oil back into the can and mix. Pour from one can to another several times to ensure the pigments are mixed. When using stain from more than one container, use only about 2/3 of the can and then intermix the remainder with the next can. **DO NOT THIN.**

EXTRACTIVE BLEEDING: Some woods contain water soluble colorings or extractives that tend to bleed to the surface. This bleeding may be unsightly but is not damaging to the finish. If it has occurred, allow the coating to dry completely, then wash with a mild detergent solution and rinse with clear water.

APPLICATION: Weather Screen is best applied with a natural bristle brush. Thoroughly stain ends and edges of boards. To help avoid lap marks, stain only a few boards at a time, working from top to bottom or from side to side, keeping the leading edge wet. Spray applications should be followed immediately while coating is still wet by a dry brush or roller. Roller applications should be limited to rough surfaces. Avoid applications to a hot surface in direct sunlight.

FOR ADDITIONAL INFORMATION - ASK YOUR DEALER