



UNDER PRESSURE

ACTIVE INGREDIENT — CHLORINE 100%

The Department of Transportation requires shippers to obliterate Green Tag Labels on empty cylinders so they may not be mistaken for full cylinders. Tear off our Green Tag Label along dotted perforation which permits correct return address to remain.

Weigh cylinders and discharge while on scale. Prevent flow back into cylinder as cylinder rupture may result. Check cylinders weight after discharging.

This needle valve is standard for Chlorine, all threads are right hand. Turn clockwise to tighten. Never use pipe fittings having standard tapered thread.

Georgia-Pacific

LOS ANGELES, CALIFORNIA 90040





POISON

CHLORINE - LIQUEFIED

(UNDER PRESSURE)

ACTIVE INGREDIENT — CHLORINE 100%

DANGER! KEEP OUT OF REACH OF CHILDREN. Hazardous liquid and gas under pressure.

Do not breathe air containing this gas.

Do not get in eyes or on skin.

Do not heat cylinders.

Have available emergency gas masks approved by U.S. Bureau of Mines for chlorine service. Handle and use only in accordance with practice recommended by the chlorine producer.

FIRST AID: In case of exposure, remove patient to fresh air. Keep him warm and quiet, and send for a physician immediately.

CYLINDER STORAGE AND HANDLING

KEEP AWAY FROM HEAT.

DO NOT STORE IN SUNLIGHT.

NEVER DROP CYLINDERS.

BE SURE CONNECTIONS ARE TIGHT.

ICC REGULATIONS PROHIBIT REFILLING WITHOUT PERMISSION OF OWNER.

Do not tamper with fusible safety plug in valve.


Always replace valve outlet cap and valve protection cover.

E. I. REG. NO. 7558 26

Georgia-Pacific



LOS ANGELES, CALIFORNIA 90040

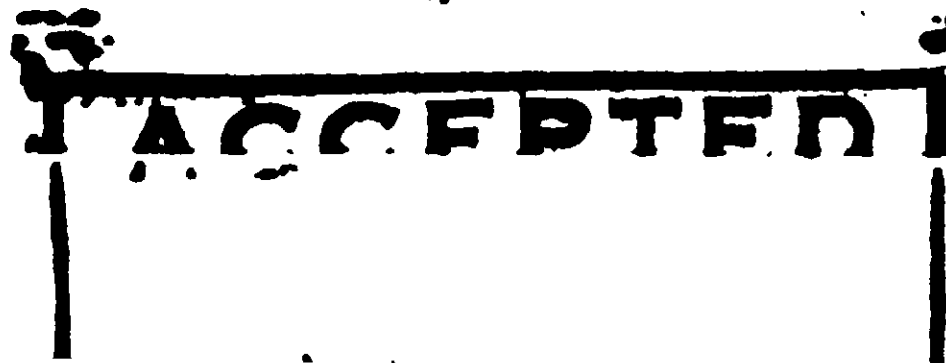

Handwritten signature or initials.