


1/10/76

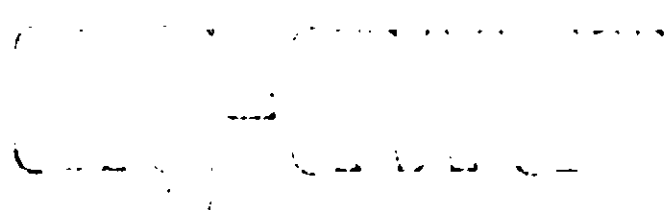

Directions

This packet (3 oz.) will treat 500 gallons of pond water. Application rates in excess of 3 ounces of product per 500 gallons of water will kill fish and other aquatic life. For best results, use with pond water free of algae as much as possible. Less ALOXAWAY is required for water with algae.

Add ALOXAWAY to water at the rate of 2 oz. per 100 gallons (250 L) of water. For 500 gallons of water, the proper amount of ALOXAWAY is 3 oz. Pour it into the water in 3 pours at a time. Pour slowly. Do not aerate water to be treated while working at the edge of the pond.

If you are unable to add the 3 oz. of ALOXAWAY to the water in 3 pours, add the 3 oz. of ALOXAWAY to a bucket of water and pour it into the pond. The water should be aerated immediately to avoid slightly cloudy water.

Computation of gallons

For ponds, multiply length x width x depth x 7.5 = gallons

For circular ponds, multiply length x width x depth x 5.9 = gallons


If water is added from a municipal water supply to refill a drained pond, be sure no chlorine is present in the water. Chlorine used for water treatment is toxic to extremely small amounts of fish and other pond life.

Warnings:

For use only in ponds. Do not use in streams or rivers. Do not use in water bodies where there is a possibility of drinking water.



GENERAL DEVELOPMENTS CORP.
1000 W. 10th St. Suite 100
Ocala, Florida 32132

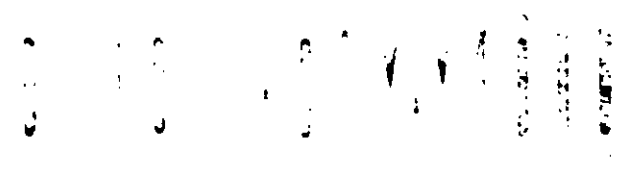

3 oz. foil packet will treat 500 gallons

economical

MADE IN U.S.A.

#7476-1

PFST INDUSTRIES