

DESCRIPTION ← 12 PT CAP

This exterior wood preserver combines water repelling and wood preserving properties to give lasting protection to woods such as pine, oak, hickory, maple, birch, elm, poplar, ~~and~~ sycamore and plywood. The preservative is of a zinc-base and will check decay, fungi, rotting, termites and similar wood infesting pests. Apply by brush, spray or dip treatment. Coverage is from 250 to 450 square feet per gallon, depending upon the condition of the wood on which it is applied.

PRECAUTIONARY STATEMENTS ←

Hazards to Humans and Domestic Animals - Warning
EYES - Do not get in eyes. Can cause severe irritation, redness, tearing or blurred vision.
SKIN - Avoid skin contact. May cause moderate irritation, defatting or dermatitis.
BREATHING - Do not breathe vapor or spray mist. Can cause nasal and respiratory irritation, fatigue, headache, unconsciousness, asphyxiation.
SWALLOWING - Do not ingest. Can cause gastrointestinal irritation, nausea, vomiting, diarrhea. Aspiration of material into lungs can cause chemical pneumonitis which can be fatal.
OTHER - Do not use treated wood where there will be food or bee contact. Keep container closed when not in use. Wear protective clothing and gloves when using this wood preserver or handling freshly treated lumber.

ENVIRONMENTAL HAZARDS ←

The product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow spray mist to drift onto beneficial vegetation.

PHYSICAL AND CHEMICAL HAZARDS ←

Do not use or store near high heat, sparks or open flame. Avoid contact with strong oxidizing agents (bleach, swimming pool chlorine, etc.).

BEST AVAILABLE COPY

ACCEPTED
JUL 17 1985
Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 7500-17

UPC CODE

BLOCK 12 PT CAP


BLOCK 12 PT CAP

HANDI-GARD BLACK ZINC II WOOD PRESERVER

FORMULA 5862



BEST AVAILABLE

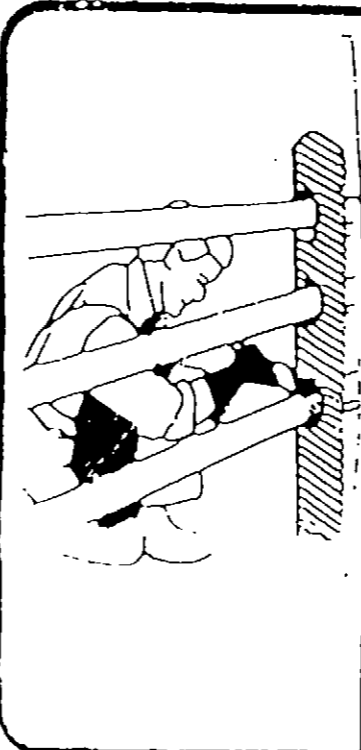


Active Ingredients	
Zinc Naphthenate	15%
Inert Ingredients	
Asphalt	13%
Petroleum Distillate	72%
(Zinc as metal 2%)	100%

KEEP OUT OF REACH OF CHILDREN
WARNING
MAY BE FATAL IF SWALLOWED
VAPORS HARMFUL

See additional precautionary statements elsewhere on label.

STATEMENT OF PRACTICAL TREATMENT
Eyes - Flush with large amounts of water, lifting upper and lower lids occasionally. Get medical attention.
Skin - Thoroughly wash with soap and water. Remove contaminated clothing and laundry before re-use.
Inhalation - Remove individual to fresh air. If breathing is difficult, administer oxygen. If breathing has stopped, administer artificial respiration. Keep victim warm, quiet. Get medical attention.
Ingestion - DO NOT induce vomiting. Get medical attention.

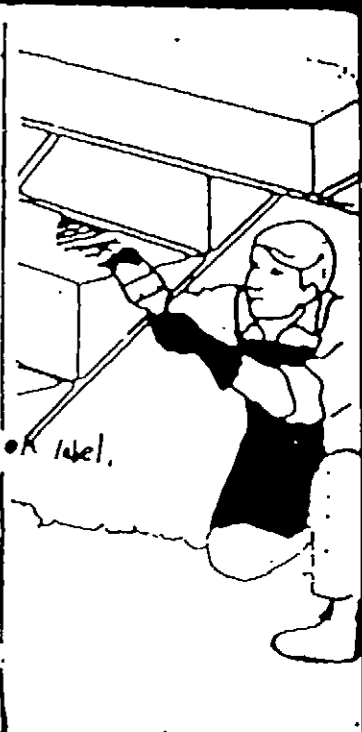

EPA REG. NO. 7500

NET CONTENTS: ONE GALLON

EPA Est. 7500-

Applicable facility indicated by first digit on clearance.

- 1. OH-01 2. NJ-01 3. GA-01 4. CA-01 5. OR-01 6. IA-01 7. MO-01 8. FL-01 9. LA-01 15. TE-01

12 FT CAP → DIRECTIONS FOR USE Reg. # 7500-17 Pm 21 1081

It is a violation of Federal Law to use this product in a manner inconsistent with its label.

NOTE: FOR EXTERIOR USE ONLY. DO NOT USE TREATED WOOD WHERE THERE WILL BE FREQUENT SKIN CONTACT.

Use Handi-Gard Black Zinc Wood Preserver just as it is and do not thin for any type of application. Shake well or stir thoroughly before using. Before using, all previous paint and rotted wood should be removed, and the surface cleaned of loose particles. Make brush applications as liberal as necessary to obtain good penetration. Two liberal coats are required, particularly on wood that is to contact the ground. For dip treatment, soaking time depends on the type of wood and its thickness. Approximately 30 minutes of soaking is recommended for wood not more than 1 inch thick. For heavy timbers, 12 to 48 hours of soaking is recommended.

COPY

12 FT CAP →

STORAGE AND DISPOSAL

BEST AVAILABLE COPY

10 FT CAP →

STORAGE: Store at temperatures under 120°F. Wear gloves and protective clothing if contact with wood preserver is possible. Store only in original container. Do not store near pesticides, fertilizers, food or feed. In case of container leakage, dispose of wood preserver according to the disposal directions on this label.

10 FT CAP →

PESTICIDE DISPOSAL:

Household - Securely wrap original container in several layers of newspaper and discard in trash.
Other - Pesticide wastes are toxic. Improper disposal of excess wood preserver, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

10 FT CAP →

CONTAINER DISPOSAL:

Household - Do not reuse can. Rinse thoroughly before discarding in trash.
Other - Triple rinse. Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures

7500-17