

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER

Highly corrosive. Causes skin and eye damage. May be fatal if swallowed. Do not get in eyes. Wear goggles to protect eyes. Wear clothing that protects the body and limbs. Avoid breathing dust or fumes. Wash thoroughly after use.

PRACTICAL TREATMENT


If swallowed: Do not induce vomiting. If in eyes: Flush with water for at least 15 minutes. If on skin: Wash with plenty of water. If on clothing: Remove and wash separately.

ENVIRONMENTAL HAZARDS

May be harmful to aquatic life. Do not discharge into water bodies. Follow local regulations for disposal.

PHYSICAL AND CHEMICAL HAZARDS

Corrosive to metals. May react with certain materials. Store in a cool, dry place. Keep away from heat and open flames.

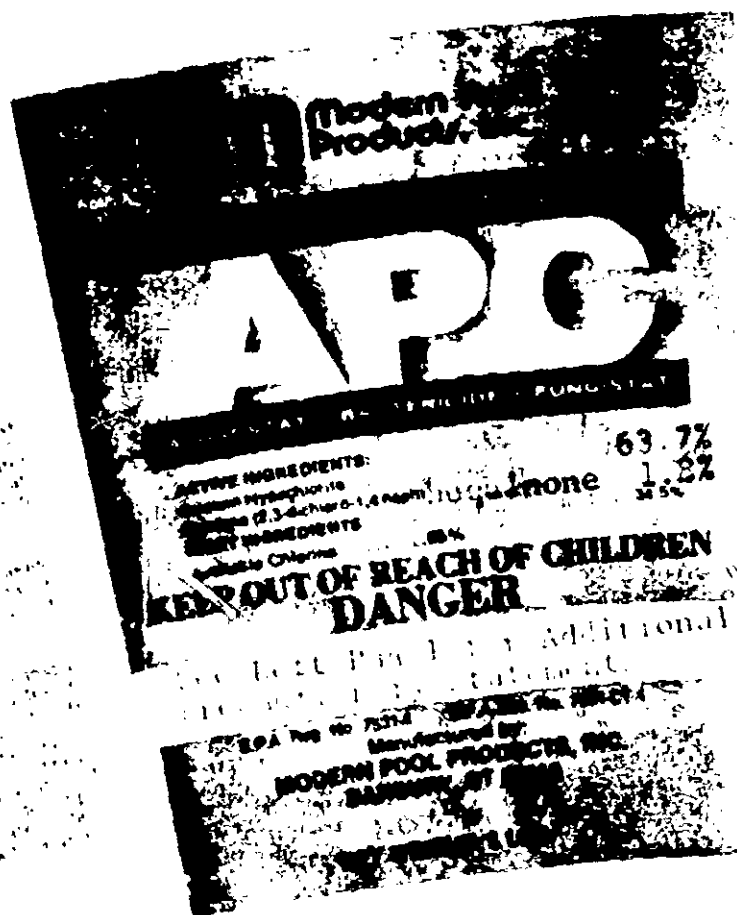

A.P.C. DIRECTIONS

Directions:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

1. All pools must be properly balanced before using APC.
2. Use APC in pools with a minimum of 10,000 gallons of water.
3. Scatter APC evenly over the water surface. Do not stir or splash APC into the water.
4. After scattering APC, wait 15 minutes before swimming.

INITIAL DOSAGE

For pools with 10,000 to 20,000 gallons of water, use 1/2 cup of APC.

MAINTENANCE DOSAGE

For pools with 10,000 to 20,000 gallons of water, use 1/4 cup of APC weekly.

NOTE:

APC is a strong oxidizer. Do not use in pools with metal parts.

STORAGE:

Store APC in a cool, dry place. Keep away from heat and open flames. Do not store in plastic containers. Dispose of APC properly.

FOR DOCUMENT AVAILABLE

75-10000
100-10000
100-10000

Modern Pool Products, Inc.

APC

63.7%
1.82

**KEEP OUT OF REACH OF CHILDREN
DANGER**

See label for additional
directions and cautions.

Manufactured by:
MODERN POOL PRODUCTS, INC.
BIRMINGHAM, AL 35202

A.P.C. DIRECTIONS

Directions:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

1. Add APC to the water in the pool.
2. After APC is added, the water in the pool should be circulated for 24 hours.
3. After 24 hours, the water in the pool should be tested for pH.
4. If the pH is not between 7.2 and 7.6, add pH adjuster to the pool.
5. After the pH is adjusted, the water in the pool should be circulated for 24 hours.
6. After 24 hours, the water in the pool should be tested for chlorine.
7. If the chlorine is not between 1.0 and 1.5 ppm, add chlorine to the pool.
8. After the chlorine is adjusted, the water in the pool should be circulated for 24 hours.
9. After 24 hours, the water in the pool should be tested for alkalinity.
10. If the alkalinity is not between 100 and 120 ppm, add alkalinity adjuster to the pool.

NOTE:

STORAGE:

APC should be stored in a cool, dry place. Do not store APC in a plastic container. APC should be stored in its original container.

DOCUMENT AVE.