

# WESTERN ALGAE & SLIME CONTROL NO. 1 CONCENTRATED LIQUID

ACTIVE INGREDIENTS ..... 17.5%  
 Disodium Cyanodithioimidocarbonate ..... 7.35%  
 Potassium N-Methyldithiocarbamate ..... 10.15%  
 INERT INGREDIENTS ..... 82.5%

Weight of active ingredients: 1.63 pounds per gallon  
 Weight per gallon: 9.31 pounds

**ACCEPTED**

MAY 20 1975

UNDER THE FEDERAL INSECTICIDE  
 FUNGICIDE AND RODENTICIDE ACT  
 FOR ECONOMIC PEST CONTROL  
 EPA REG. NO. 7547-21

Changes in temperature create air pressure inside drums. Use proper caution in unscrewing plug. Unscrew plug slowly, allowing air to escape before completely removing.

**WARNING:** KEEP OUT OF REACH OF CHILDREN. HARMFUL IF SWALLOWED. MAY CAUSE SKIN IRRITATION OR DAMAGE TO EYES. DO NOT GET IN EYES, ON SKIN OR CLOTHING. Wear goggles and protective gloves and clothing. In case of contact with this material, wash skin with plenty of soap and warm water; flush eyes with plenty of water for at least 15 minutes and get medical attention. If this material is spilled on clothing, wash clothing thoroughly before re-wearing. If swallowed, call a physician immediately. Give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. FOR INDUSTRIAL USE ONLY. Do not reuse empty drum. Recondition or destroy by perforating or crushing and burying in a safe place away from water supplies.


**DIRECTIONS FOR USE:** For control of algae, in industrial recirculating water cooling towers.  
**INITIAL DOSAGE:** When microbial growth is evident, apply 3.3 to 6.6 fl. oz. per 1,000 gallons water contained in the system. Repeat dosage until control is evident.  
**SUBSEQUENT DOSAGE:** When control is evident, apply 1.1 to 6.6 fl. oz. per 1,000 gallons water contained, every 1 to 5 days, or as needed. Product may be applied at any point in the system where good mixing occurs. Badly fouled systems must be cleaned before the product is added.

**CAUTION:** This product is toxic to fish and wildlife. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label. Do not contaminate water by cleaning of equipment, or disposal of wastes.

SOLD BY WESTERN CHEMICAL COMPANY

EPA REGISTRATION NO. 7547-21 EPA ESTABLISHMENT NO. 754-MO-1

**PLEASE READ  
ANY CAUTION OR  
DIRECTION LABELS  
ON THIS DRUM**

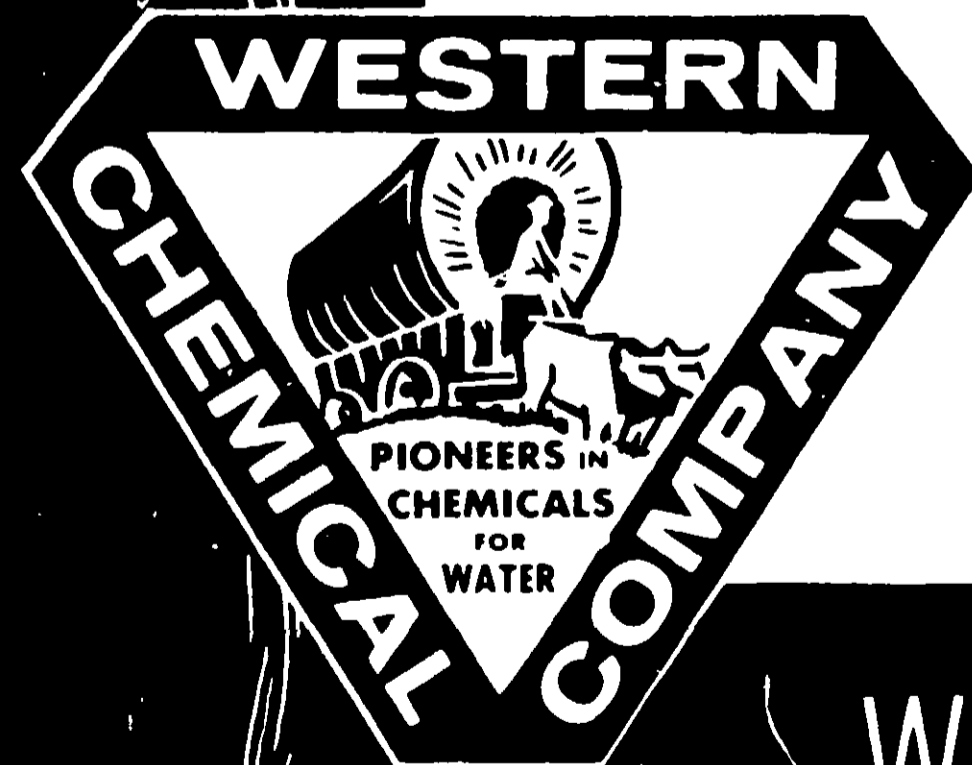

# WESTERN CHEMICAL COMPANY

1345 TANEY  
NORTH KANSAS CITY, MO.  
64116

# WESTERN ALGAE & SLIME CONTROL NC-M CONCENTRATED LIQUID

ACTIVE INGREDIENTS .....	17.5%	Weight of active ingredients: 1.63 pounds per gallon
Disodium Cyanodithioimidocarbonate .....	7.35%	
Potassium N-Methyldithiocarbamate .....	10.15%	Weight per gallon: 9.31 pounds
INERT INGREDIENTS .....	82.5%	

Changes in temperature create air pressure inside drums. Use proper caution in unscrewing plug. Unscrew plug slowly, allowing air to escape before completely removing.

**WARNING:** KEEP OUT OF REACH OF CHILDREN. HARMFUL IF SWALLOWED. MAY CAUSE SKIN IRRITATION OR DAMAGE TO EYES. DO NOT GET IN EYES, ON SKIN OR CLOTHING. Wear goggles and protective gloves and clothing. In case of contact with this material, wash skin with plenty of soap and warm water; flush eyes with plenty of water for at least 15 minutes and get medical attention. If this material is spilled on clothing, wash clothing thoroughly before re-wearing. If swallowed, call a physician immediately. Give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. FOR INDUSTRIAL USE ONLY. Do not reuse empty drum. Recondition or destroy by perforating or crushing and burying in a safe place away from water supplies.

**DIRECTIONS FOR USE:** For control of algae, in industrial recirculating water cooling towers.  
**INITIAL DOSAGE:** When microbial growth is evident, apply 3.3 to 6.6 fl. oz. per 1,000 gallons water contained in the system. Repeat dosage until control is evident.  
**SUBSEQUENT DOSAGE:** When control is evident, apply 1.1 to 6.6 fl. oz. per 1,000 gallons water contained, every 1 to 5 days, or as needed. Product may be applied at any point in the system where good mixing occurs. Badly fouled systems must be cleaned before the product is added.

**CAUTION:** This product is toxic to fish and wildlife. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label. Do not contaminate water by cleaning of equipment, or disposal of wastes.

SOLD BY WESTERN CHEMICAL COMPANY

EPA REGISTRATION NO. 7547-21 EPA ESTABLISHMENT NO. 754-MO-1

PLEASE READ  
ANY CAUTION OR  
DIRECTION LABELS  
ON THIS DRUM



# WESTERN CHEMICAL COMPANY

1345 TANEY  
NORTH KANSAS CITY, MO.  
64116