

# FORMULA 612

FOR CONTROL OF ALGAE & BACTERIAL & FUNGAL SLIMES IN INDUSTRIAL RECIRCULATING COOLING TOWERS, AIR WASHERS AND/OR EVAPORATIVE CONDENSERS  
FOR INDUSTRIAL USE ONLY

ACTIVE INGREDIENT ..... 22.5%  
Sodium dichloro-s-triazinetrione dihydrate  
INERT INGREDIENTS ..... 77.5%  
Includes stabilizing & desiccating agents  
Available chlorine—12.6%

#### DIRECTIONS FOR USE:

**INITIAL DOSE** When system is noticeably fouled, apply 1/2 to 1 pound of Formula 612 per 1000 gallons of water in the system. Repeat initial dosage until 1 ppm chlorine residual is established, as determined by a chlorine test kit.

**SUBSEQUENT DOSE** When microbial control is evident, apply 1/4 to 1/2 pound per 1000 gallons of contained water. Repeat as needed to maintain 1 ppm of chlorine residual in the recirculating water for at least 4 hours. Test water frequently enough to insure proper chlorine residual. This product should be applied to the water basin at a point where good mixing occurs. Badly fouled systems must be cleaned before treatment is begun.

## DANGER:

### KEEP OUT OF REACH OF CHILDREN

Corrosive, causes eye damage. May be fatal if swallowed. Do not get in eyes, on skin or on clothing. Irritating to nose and throat. Avoid breathing dust. May cause burns to broken skin. Wash hands after handling.

**FIRST AID:** If swallowed, feed gruel, cooked cereal, or bread soaked in milk, followed by olive oil or cooking oil. In case of personal contact, remove excess material and flush skin or eyes with cold water for at least 15 minutes. For eyes, get medical attention. Remove and wash contaminated clothing before reuse.

**CHEMICAL HAZARDS: STRONG OXIDIZING AGENT.** Mix only with water. Use clean dry utensils. Contamination by moisture, organic matter, or other chemicals may liberate hazardous gases. Store in a cool, dry, well ventilated area away from heat or open flame. Decomposes at 350°-475°F with liberation of harmful gases. In case of decomposition, if possible, isolate container in open air. Flood with large amounts of water. Keep container tightly closed when not in use. Rinse empty container thoroughly with water to dissolve all material before discarding.

**ENVIRONMENTAL HAZARDS** This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public waters. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on the label.

**PLEASE READ  
ANY CAUTION OR  
DIRECTION LABELS  
ON THIS DRUM**



ACCEPTED  
7547-25  
NOV 28 1975  
UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND ROBENTICIDE ACT  
FOR ECONOMIC POISON REGISTER-  
ED UNDER NO.

EPA Reg. No. 7547-25

EPA Est. No. 7547-MO-1

Form 122

# WESTERN CHEMICAL COMPANY

1345 TANEY  
NORTH KANSAS CITY, MO.  
64116

# FORMULA 612

FOR CONTROL OF ALGAE & BACTERIAL & FUNGAL SLIMES IN INDUSTRIAL RECIRCULATING COOLING TOWERS, AIR WASHERS AND/OR EVAPORATIVE CONDENSERS FOR INDUSTRIAL USE ONLY

**ACTIVE INGREDIENT** 22.5  
Sodium dichloro-s-triazetrione dihydrate  
**INERT INGREDIENTS** 77.5  
Includes stabilizing & desiccating agents.  
Available chlorine: 12.0%

**DIRECTIONS FOR USE**  
**INITIAL DOSE:** When system is noticeably fouled, apply 1.2 to 1.4 pound of Formula 612 per 1000 gallons of water in the system. Repeat initial dosage until 1 ppm chlorine residual is established - as determined by a chlorine test kit.

**SUBSEQUENT DOSE:** When microbial control is evident, apply 1.4 to 1.2 pound per 1000 gallons of contained water. Repeat as needed to maintain 1 ppm of chlorine residual in the recirculating water for at least 4 hours. Test water frequently enough to insure proper chlorine residual. This product should be applied to the water basin at a point where good mixing occurs. Badly fouled systems must be cleaned before treatment is begun.

## DANGER: KEEP OUT OF REACH OF CHILDREN


Corrosive. Causes eye damage. May be fatal if swallowed. Do not get in eyes, on skin or on clothing. Irritating to nose and throat. Avoid breathing dust. May cause burns to broken skin. Wash hands after handling.

**FIRST AID:** If swallowed, food, grain, cooked cereal, or bread soaked in milk, followed by olive oil or cooking oil. In case of personal contact, remove excess material and flush skin or eyes with cold water for at least 15 minutes. For eyes, get medical attention. Remove and wash contaminated clothing before reuse.

**CHEMICAL HAZARDS: STRONG OXIDIZING AGENT.** Mix only with water. Use clean dry utensils. Contamination by moisture, organic matter, or other chemicals may liberate hazardous gases. Store in a cool, dry, well-ventilated area away from heat or open flame. Decomposes at 350-475 F. with liberation of harmful gases. In case of decomposition, if possible, isolate container in open area. Flood with large amounts of water. Keep container tightly closed when not in use. Rinse empty container thoroughly with water to dissolve all material before discarding.

**ENVIRONMENTAL HAZARDS:** This product is toxic to fish. Do not allow drain should not be discharged where it will drain into lakes, streams, ponds, or public waters. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on the label.

PLEASE READ  
ANY CAUTION OR  
DIRECTION LABELS  
ON THIS DRUM

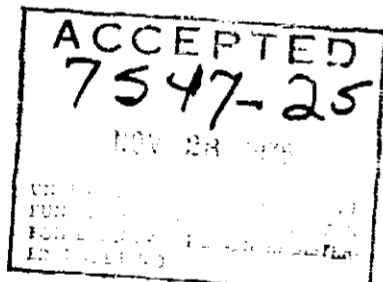

EPA Reg. No. 7547-25

EPA Est. No. 7547-MO-1

Form 122

# WESTERN CHEMICAL COMPANY

1345 TANEY  
NORTH KANSAS CITY, MO  
64116