

KEM TEK™

CHLORI-BUOY™ FLOATING CHLORINATOR

IT'S REFILLABLE!
Works Under Pool Cover
Simple To Use • Tilts When Empty

KEEP OUT OF REACH OF CHILDREN
NO SE BEB AL AKUMAT BE LUS BANG

DANGER
PELIGRO

ACTIVE INGREDIENTS:
Trichloro-s-triazinetriene 99%

INERT INGREDIENTS: 1%

AVAILABLE CHLORINE: 88%

NOTE: Do not allow direct contact of 1" Chlorinating Tablets on the following pool surfaces: vinyl, metallic, fiberglass, painted or colored plaster. Product will bleach color out.

OK

PLASTER/GUNITE FIBERGLASS POOL

SEE NOTE

ABOVE/IN-GROUND VINYL POOL

For control of bacteria and algae.



Net 4 1/2 lbs. 1" Kem Tek™ Chlorinating Tablets for SWIMMING POOLS

Made in USA

POOL STARTUP AND HEAVY BATHER LOAD: At the start of the bathing season, in filled pools, upon filling a pool and after heavy bathing load, superchlorination is necessary. Superchlorination is the addition of two or three times as the normal amount of chlorine to oxidize and remove unwanted organic and inorganic material. The end result is the establishment of a chlorine residual of 1.0-1.5 ppm. A chlorinating agent such as KEM TEK™ KEMKLOR II™ CHLORINATING LIQUID, SHOCK™ CHLORINATING GRANULES or KEMEX™ CHLORINATING GRANULES should be used for superchlorination. Consult the labels on KEMKLOR II™, SHOCK™ or KEMEX™ for superchlorination instructions. The pool should not be used during the superchlorination process until the chlorine residual is less than 2.0 ppm.

DIRECTIONS FOR USE OF THE FLOATING CHLORINATOR

- It is a violation of federal law to use this product in a manner inconsistent with its labeling.
- DANGER:** Never mix this concentrated chemical with any other substance except generous amounts of water. See CHEMICAL HAZARDS.
- To use this container as a floating chlorinator, cut off the two large knobs nearest the cap (at opposite sides). Locate and remove the small knob which corresponds to the pool capacity in gallons (Fig. 1). Holding the CHLORI-BUOY™ Floating Chlorinator neck down, lightly shake a few times to level contents. CHLORI-BUOY™ contains KEM TEK™ 1" CHLORINATING TABLETS (slow dissolving, stabilized and highly concentrated).
 - Place CHLORI-BUOY™ Floating Chlorinator into the pool water neck down (Fig. 2). Monitor chlorine feed setting using a reliable test kit; chlorine residual should read from 1 to 1.5 ppm. To increase chlorine residual, cut off the small knob for the next higher pool capacity. As part of routine maintenance, superchlorinate regularly using an unstabilized chlorine product such as KEMKLOR II™ or SHOCK™. Adjust pH as needed with KEM TEK OH PLUS™ or KEM TEK pH MINUS™, keeping it between a 7.2 to 7.6 reading. To minimize chlorine consumption, add KEM TEK™ CHLORINE STABILIZER as needed to give a concentration of 30 ppm. Follow the instructions provided on these products' labels.

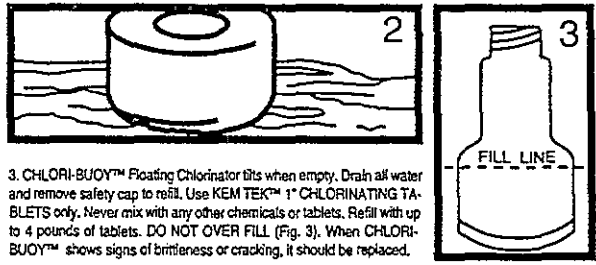

3. CHLORI-BUOY™ Floating Chlorinator tilts when empty. Drain all water and remove safety cap to refill. Use KEM TEK™ 1" CHLORINATING TABLETS only. Never mix with any other chemicals or tablets. Refill with up to 4 pounds of tablets. DO NOT OVER FILL (Fig. 3). When CHLORI-BUOY™ shows signs of brittleness or cracking, it should be replaced.

EPA Reg. No. 7616-80 EPA Est. No. 7616-CA-1; 7616-FL-1; 7616-TX-1
First digit of Lot # designates producing establishment. (Lot # code: CA: C/3, TX: T/5; FL: F/9)

PRACTICAL TREATMENT (FIRST AID)

- IF SWALLOWED:** Promptly drink a large quantity of water. DO NOT induce vomiting. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. Avoid alcohol. Get medical attention.
 - IF IN EYES:** Flush with plenty of water for 15 minutes. Get medical attention.
 - IF ON SKIN:** Immediately brush off excess chemical and flush with plenty of soap and water. Remove contaminated clothing. Wash clothing before reuse. Get medical attention if irritation persists.
 - IF INHALED:** Remove person to fresh air. Get medical attention.
- NOTE TO PHYSICIAN:** probable mucosal damage may contraindicate the use of gastric lavage.

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMAN AND DOMESTIC ANIMALS**

DANGER
CORROSIVE. CAUSES EYE AND SKIN DAMAGE. IRRITATING TO NOSE AND THROAT. HARMFUL OR FATAL IF SWALLOWED. WILL BURN WITH THE EVOLUTION OF CHLORINE AND EQUALLY TOXIC GASES.

Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Avoid breathing dust or fumes. Wash thoroughly with soap and water after handling. Remove and wash contaminated clothing before reuse.

ENVIRONMENTAL HAZARD

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product into sewer systems without previously notifying the sewage treatment plant authority. For guidance, contact your state water board or regional office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

STRONG OXIDIZING AGENT. WILL BURN WITH THE EVOLUTION OF CHLORINE AND EQUALLY TOXIC GASES. CONTACT WITH WATER SLOWLY LIBERATES IRRITATING AND HAZARDOUS CHLORINE CONTAINING GASES. DECOMPOSES AT 460° F. TO 480° F. WITH THE LIBERATION OF HARMFUL GASES.

Mix only with water. Use clean, dry utensils. Do not add this product to any dispensing device containing remnants of any other product. Such use may cause a violent reaction leading to fire or explosion. Contamination with moisture, organic matter or other chemicals may start a chemical reaction with the generation of heat, liberation of hazardous gases and possible generation of fire or explosion.

IN CASE OF FIRE: if possible, isolate container in open air or well-ventilated area. Flood with a large volume of water.

IN CASE OF CONTAMINATION OR DECOMPOSITION: Do not reseal container.

STORAGE AND DISPOSAL: Keep product in tightly closed container when not in use. Store in a cool, dry, well ventilated area away from heat or open flame. In case of decomposition, isolate container in an open area, if possible, and flood with large amounts of water. Do not reuse empty container. Rinse empty container thoroughly with water to dissolve all material before discarding. Place in trash collection or dispose in approved landfill area.

For Pool Care Advice, Call
1-800-SOS-POOL (1-800-767-7665)
Manufactured by CHEM LAB PRODUCTS, INC.
Ontario, California 91761 • Ocala, Florida 34472
Corsicana, Texas 75110

