


GLOUCESTER


MARINE PAINTS

BEST AVAILABLE COPY

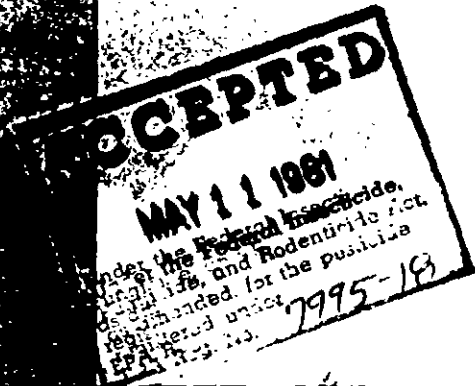

ACTIVE INGREDIENT
Cuprous Oxide*
INERT INGREDIENTS

*Total copper metal
(from cuprous oxide)

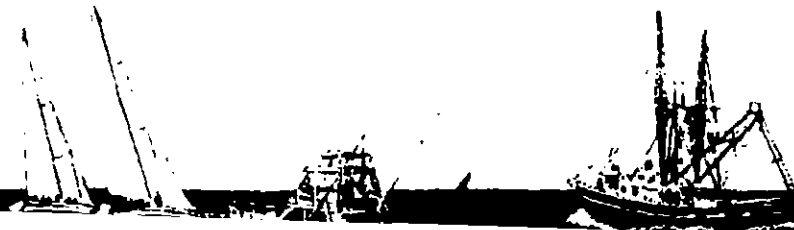

ACTIVE INGREDIENT
Cuprous Oxide* 41.19%
INERT INGREDIENTS 58.81%
*Total copper metal
from cuprous oxide 10.42%

E.P.A. Registration #7995-18
E.P.A. #7995-MA-1

extend cure time.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS CAUTION

Contains copper. May be fatal if swallowed. Avoid contact with eyes, skin or clothing. In case of contact with eyes, flush immediately with water and wash skin with soap and water. Avoid contamination of food and feed products.

Note: When product is used in confined areas, wear adequate ventilation approved by the Mining Enforcement and Safety Administration (for use in mines) or the National Institute for Occupational Safety and Health (for use in other areas).

ENVIRONMENTAL HAZARDS

Do not contaminate water, soil, or ground. Do not dispose of wastes.

PHYSICAL HAZARDS

Combustible. Keep away from heat and flame.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Fiberglass — New fiberglass must be degreased. Epoxy Thinner #551 is recommended for this purpose. Other suitable solvent or detergent wash may be used. Apply primer, or apply over #B370 or #375 Epoxy Fiberglass Primer. On previously painted fiberglass, apply to smooth clean surface.

Wood — New wood, and previously painted wood must be properly sanded. Apply directly to the clean, dry surface.

Metal — Surfaces should be brought to bright metal condition. Use Epoxy Thinner #551. Immediately apply two coats of #B374 Epoxy Red Paint in accordance with label instructions. Apply to primed surface.

STORAGE AND DISPOSAL

Close container and store in original container. Dispose of when empty.

RULE PAINT & CHEMICAL, INC., GLOUCESTER, MA U.S.A. 01930

BEST AVAILABLE COPY

BACK PANEL