



MADE IN U.S.A.



**ACCEPTED**  
June 10 - 1971  
FOR THE FEDERAL INSECTICIDE ACT  
UNDER NO. 915630

FOR THAT  
**IMPORTANT AREA**

*Comment*

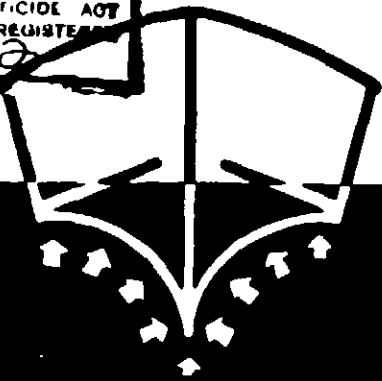

**BELOW  
THE WATER LINE**

**SUPER HEAVY DUTY**

# ANTI-FOULING

The dry coat of KL-990 contains powerful marine growth inhibitors. Tried and proven in Florida's coastal waters.



# KL-990



ONE U. S. GALLON

# KOMPOSITION

Prevents the growth of marine life on the bottom of sea-going vessels. Formulated for tropical and other heavily infested waters.

KL-990-BLUE	NET WT. NO. 9-507
ACTIVE INGREDIENTS	41.24
Water Soluble	
Water Insoluble	
Water Soluble and Petroleum A.D.	19.45
Water Insoluble	21.79
<b>TOTAL ACTIVE INGREDIENTS</b>	<b>60.48%</b>
<b>TOTAL INERT INGREDIENTS</b>	<b>39.52%</b>
	<b>100.00%</b>

**WARNING:** Keep Out of Reach of Children. See side panel for additional precautions.


*Handwritten mark*

2/2


# SUPER HEAVY DUTY

One Gallon U.S. Standard Measure

3.79 Liters Metric Measure



FOR  
THAT  
IMPORTANT  
AREA

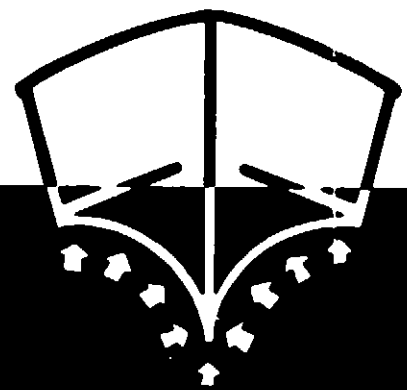

BELOW  
THE WATER LINE

## DIRECTIONS

For maximum results remove old paint layers and apply two full coats, allowing sufficient time for drying between applications. A poorly brushed film will not furnish satisfactory protection. KL-990 should be flowed on with a good quality long bristle brush.

Thick, dead layers of old paint will rapidly absorb KL-990 and reduce its effectiveness. Do not thin KL-990, even for prime coat application to new wood. New fiberglass surfaces need a wet sanding before application of the first coat of KL-990. Steel, aluminum and iron surfaces must be undercoated with a high grade anti-corrosive primer. Loose paint, sea growth and dust must be removed from all surfaces to be coated.

The Komposition is easily stirred if the can is inverted and shaken briefly before opening. When ready for application, KL-990 will be uniform in color. KL-990 can be brushed on with extreme ease.

KL-990 dries to a smooth, attractive finish and does not crack, chip, check or peel. Use firm brush action to insure good surface contact, especially on new fiberglass surfaces. Brushes are cleaned easily with mineral spirit.

For best results allow to dry 6 hours between coats and allow to dry at least 6 hours before launching.

A hull previously coated with KL-990 should be scrubbed immediately upon hauling, using plenty of water and a stiff brush. Re-apply KL-990 when the hull is dry.

**WARNING: HARMFUL OR FATAL IF SWALLOWED** Contains copper and other toxic substances. Do not eat or drink and before eating or smoking. Do not contaminate or store near feed or foodstuffs. Do not breathe vapor or spray mist. Avoid contact with skin and eyes and breathing of vapor or spray mist. May be absorbed through skin. Wash with mineral spirit, then with soap and water.

**Combustible** Keep away from heat and open flame. Use with adequate ventilation. Close

MFG BY U. S. MARINE COATS  
SARASOTA, FLORIDA,

## CH

Anti-f  
city  
into

The co  
adh  
elin  
ava  
a s

KL-99  
cov  
run

Prolong  
ont  
lau  
of t

Can be  
fac  
and  
rem