

BEGIN FRONT PANEL

**NIPON SODA
65 EC**

ACTIVE INGREDIENT:	
Calcium Hypochlorite	67.0%
INERT INGREDIENTS:	<u>33.0%</u>
TOTAL	100.0%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT (FIRST AID)

IF CONTACT WITH EYES OCCURS, flush with cold water for at least 15 minutes. Get medical attention.

IF CONTACT WITH SKIN, brush off excess chemical and flush skin with cold water for at least 15 minutes. If irritation persists, get medical attention.


IF SWALLOWED, drink large amounts of water. DO NOT induce vomiting. Call a physician or poison control center immediately.

Manufactured by:

NIPPON SODA CO., LTD.
Ohtemachi, Chiyoda-ku, Tokyo, Japan

EPA REG. NO. 8033-7

EPA EST. NO. 8033-JP-2

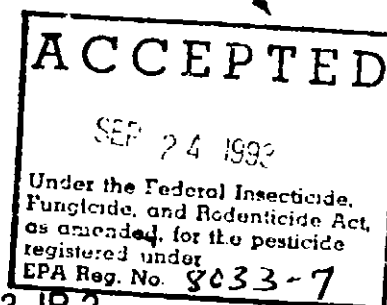

NET CONTENTS:

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Highly corrosive. Causes skin and eye damage. May be fatal if swallowed. Do not get in eyes, on skin or on clothing. Wear goggles or safety glasses and rubber gloves when handling this product. Irritating to nose and

1
BEST AVAILABLE COPY

throat. Avoid breathing dust. Remove and wash contaminated clothing before reuse.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in a NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of EPA.

PHYSICAL OR CHEMICAL HAZARDS

STRONG OXIDIZING AGENT: Mix only with water. Use clean dry utensils. Do not add this product to any dispensing device containing remnants of any other product. Such use may cause a violent reaction leading to a fire or explosion. Contamination with moisture, organic matter or other chemicals will start a chemical reaction and generate heat, chlorine gas (and possible fire and explosion). In case of contamination or decomposition, do not reseal container. If possible, isolate container in open air or well ventilated area. Flood area with large volumes of water, if necessary.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Keep this product dry in a tightly closed container, when not in use. Store in a cool, dry well ventilated area away from heat or open flame. In case of decomposition, isolate container (if possible) and flood area with large amounts of water to dissolve all material before discarding this container. Do not reuse empty container but place in trash collection. Do not contaminate food or feed by storage, disposal, or cleaning of equipment.

SWIMMING POOL WATER DISINFECTION

For a new pool or spring start-up, superchlorinate with 10 to 20 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Adjust and maintain pool water pH to between 7.2 to 7.6. Adjust and maintain the alkalinity of the pool to between 50 to 100 ppm.

To maintain the pool, add manually or by a feeder device 2 oz. of this product for each 10,000 gallons of water to yield an available chlorine residual between 0.6 to 1.0 ppm by weight. Stabilized pools should maintain a residual of 1.0 to

1.5 ppm available chlorine. Test the pH, available chlorine residual and alkalinity of the water frequently with appropriate test kits. Frequency of water treatment will depend upon water temperature and number of swimmers.

Every 7 days, or as necessary, superchlorinate the pool with 10 to 20 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Do not reenter pool until the chlorine residual is between 1.0 and 3.0 ppm.

At the end of the swimming pool season or when water is to be drained from the pool, chlorine must be allowed to dissipate from treated pool water before discharge. Do not chlorinate the pool within 24 hours prior to discharge.

WINTERIZING POOLS: - While the water is still clear and clean, apply 0.6 oz. of this product per 1000 gallon, while filter is running, to obtain a 3 ppm available chlorine residual, as determined by a suitable test kit. Cover pool, prepare heater, filter and heater components for winter by following manufacturers' instructions.

SPAS, HOT-TUBS, IMMERSION TANKS, ETC.

SPAS/HOT-TUBS - Apply 0.5 oz. of product per 500 gallons of water to obtain a free available chlorine concentration of 5 ppm, as determined by suitable chlorine test kit. Adjust and maintain pool pH to between 7.2 and 7.8. Some oils, lotions, fragrances, cleaners, etc. may cause foaming or cloudy water as well as reduce the efficiency of the product.

To maintain the water, apply 0.5 oz. of product per 500 gallons of water over the surface to maintain a chlorine concentration of 5 ppm.

After each use, shock treat with 1.5 oz. of this product per 500 gallons of water to control odor and algae.

During extended periods of disuse, add 1.5 oz. of product daily per 500 gallons of water to maintain a 3 ppm chlorine concentration.

HUBBARD AND IMMERSION TANKS - Add 0.5 oz. of this product per 100 gallons of water before patient use to obtain a chlorine residual of 25 ppm, as determined by a suitable test kit. Adjust and maintain the water pH between 7.2 and 7.6. After each use drain the tank. Add 0.5 oz. to a bucket of water and circulate this solution through the agitator of the tank for 15 minutes. and then rinse out the solution. Clean tank thoroughly and dry with clean cloths.

HYDROTHERAPY TANKS - Add 1 oz. of this product per 1000 gallons of water to obtain a chlorine residual of 1 ppm, as determined by a suitable chlorine test kit. Pool should not be entered until the chlorine residual is below 3 ppm. Adjust and maintain the water pH to between 7.2 and 7.6. Operate pool filter continuously. Drain pool weekly, and clean before refilling.

AVAILABLE COPY

REFER TO PAMPHLET "HI-CHLON 65 EU" for further directions for use.

END FRONT PANEL