

DIRECTIONS

Apply to wood surfaces immediately before use. Repeat application as necessary. Wood to be treated should be as dry as possible, not less than 10% moisture. Allow 24 hours for drying of surfaces. For lumber treated by brushing, 3 minutes per inch of thickness or by 2 or more brush or spray coats.

Periodic inspection and re-application may be necessary to maintain protection against wood rot, decay and fungus.

This material will stain the skin.

WARNING

FLAMMABLE — DO NOT USE NEAR FIRE OR FLAME. HARMFUL OR FATAL IF SWALLOWED. DO NOT INDUCE VOMITING.

CAUTION:

May cause skin irritation. Avoid prolonged or repeated contact with skin.


KEEP OUT OF CHILDREN'S REACH

Made & Printed in U.S.A.

RAILROAD TIES

FENCES

CREOSOTED

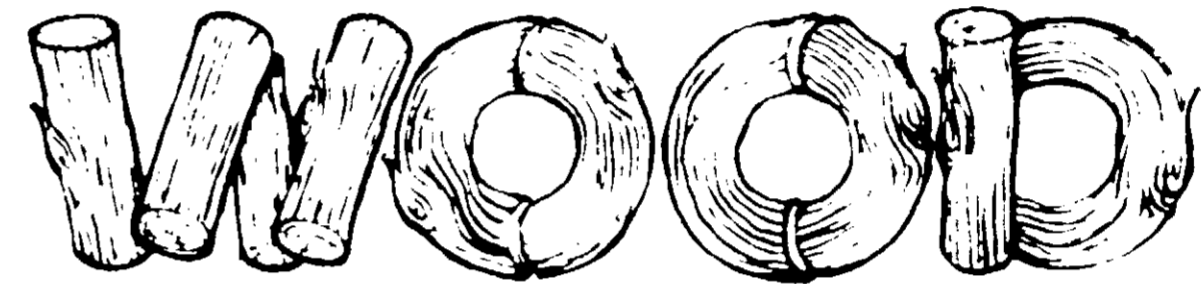

PRESERVATIVE

USDA REG. NO. 8081-1

SEE OTHER WARNINGS ON BACK PANEL

FOR DOCK AND

LAUN

4-11-1971

CREOSOTED WOOD PRESERVATIVE

USDA REG. NO. 8081-1

SEE OTHER WARNINGS ON BACK PANEL

FOR DOCK AND PILING



TELEPHONE POLES

LAUNDRY POLES, ETC.

USE CREOSOTED WOOD PRESERVATIVE FOR

UNDERPINNING • POSTS
DOCKS • COLUMNS • RAILS
POLES • STOCKADE FENCES, ETC.

WHAT IS CREOSOTE?

It is the oldest wood preservative known. No other preservative has yet demonstrated, through service, the durability and dependability as CREOSOTE. The only way to assure complete protection is through pressure treatment, but where that is impractical this type preservative is recommended.

ADVANTAGES:

Treated wood has many times the service life of untreated wood. Savings in replacement costs over the years will repay many times the cost of untreated wood by warding off decay, fungus and rot.

Creosote Preservative is not intended as an effective measure for termites in the treatment of buildings.

NOTICE TO PURCHASER

DE WITT PRODUCTS CO
DETROIT, MICH. 48209

ONE GALLON: U. S. MEASURE

R HOME, INDUSTRY AND FARM CONSTRUCTION

DeWitt's

CREOSOTED WOOD PRESERVATIVE


USDA REG. NO. 8081-1

WATER REPELLENT TYPE PRESERVATIVE
READY TO USE

ACTIVE INGREDIENTS	
CREOSOTE OIL	12.0%
ASPHALT 80-120 PEN	42.1%
MINERAL SPIRITS	45.9%
TOTAL	100.0%

CAUTION: Keep Out of the Reach of Children
SEE OTHER WARNINGS ON BACK PANEL

FOR DOCK AND PILING

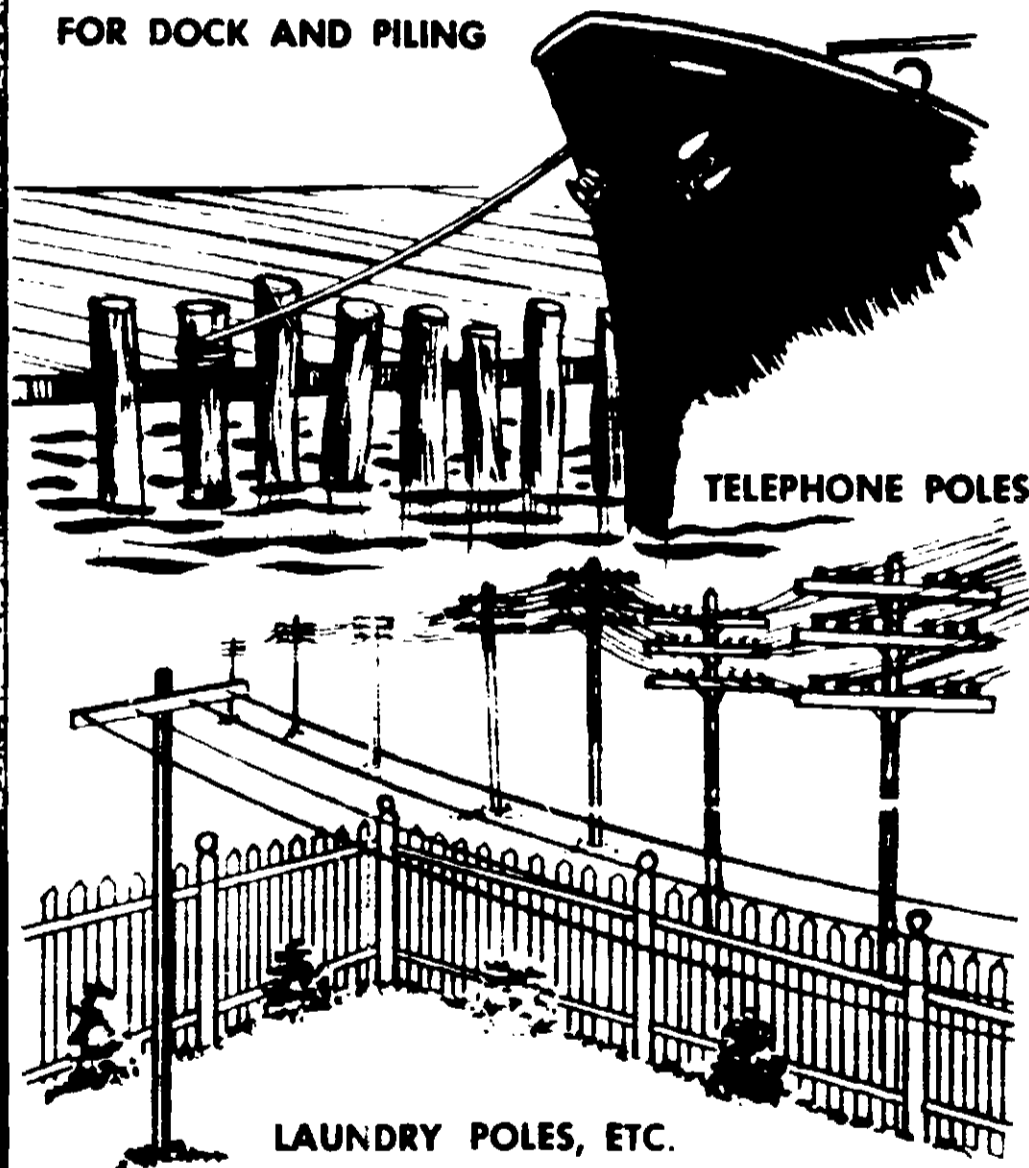

FOR LONGER WOOD LIFE

USE CREOSOTED WOOD PRESERVATIVE FOR
UNDERPINNING • POSTS
DOCKS • COLUMNS • RAILS
POLES • STOCKADE FENCES, ETC.

WHAT IS CREOSOTE?

It is the oldest wood preservative known. No other preservative has yet demonstrated, through service, the durability and dependability as CREOSOTE. The only way to assure complete protection is through pressure treatment, but where that is impractical this type preservative is recommended.

ADVANTAGES:

Treated wood has many times the service life of untreated wood. Savings in replacement costs over the years will repay many times the cost of untreated wood by warding off decay, fungus and rot.

Creosote Preservative is not intended as an effective measure for termites in the treatment of buildings.

NOTICE TO PURCHASER

The following warranty is in lieu of all expressed or implied warranties, namely that all goods are manufactured of first class material. Our liability for damages shall in no case exceed the purchase price of the goods.

DE WITT PRODUCTS CO.
DETROIT, MICH. 48209

ONE GALLON: U. S. MEASURE