



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON D.C., 20460

OFFICE OF  
PREVENTION, PESTICIDES AND  
TOXIC SUBSTANCES

Ameron Coatings.  
1200 Bluegrass Lakes Pkwy  
Alpharetta, GA. 30004

AUG 24 2006

Attention: Mark Clements  
Regulatory Manager

Subject: Amercoat 214 Blue and Red  
- EPA Reg. No. 8120-55  
- Amendment Dated July 24, 2006

This will acknowledge receipt of your notification for the submitted requests under the provisions of FIFRA Section 3(c) (9). Based on a review of the submitted material, the following apply:

"Label statements for first aid measures have been updated in response to PR Notice 2001-1".

The Notification is in compliance with PR Notice 98-10 and is acceptable if the following amendments are included:

- Under the **FIRST AID** section, under the heading **If inhaled**, the word "not" should be included in the second bullet after "If the person is"
- Under the **FIRST AID** section, under the headings **If inhaled**, **If on skin or clothing**, and **If in eyes**, add an ending bullet that states "Call a poison control center or doctor for further treatment advice".

This information has been made a part of your file.

If you have any questions concerning this letter, please contact Demson Fuller at (703) 308-8062.

Sincerely,

A handwritten signature in cursive script that reads "M Swindell".

Marshall Swindell  
Product Manager (33)  
Regulatory Management Branch 1  
Antimicrobials Division (7510C)

283



---

Monday, July 24, 2006

Document Processing Desk (PRN)  
Office of Pesticide Programs (7504P)  
USEPA  
Room S-4900, One Potomac Yard  
2777 South Crystal Drive  
Arlington, VA 22202-4501

Re: Response to PR Notice 2001-1 (8120-55) Amercoat 214 Blue

Sir/Madam:

Enclosed find EPA Form 8570-1 and copies of amended labels for Amercoat 214 Blue Antifouling. Label statements for first aid measures have been updated in response to PR Notice 2001-1.

“This notification is consistent with the provisions of PR Notice 95-2 and EPA regulations at 40 CFR 152.46 and no other changes have been made to the labeling or the confidential statement of formula of this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if this notification is not consistent with the terms or PA Notice 95-2 and 40 CAR 152.46 this product will be in violation of FIFRA and I may be subject to action and penalties under Sections 12 and 14 of FIFRA.”

If you require additional information contact me at 678-393-0653 x330 or [mclements@ameron.com](mailto:mclements@ameron.com).

Sincerely,

A handwritten signature in black ink, appearing to read 'Mark Clements', written in a cursive style.

Mark Clements

Ameron Coatings  
1200 Bluegrass Lakes Pkwy  
Alpharetta, Ga. 30004

# A M E R O N

## AMERCOAT®

### 214 RED *DRAFT*

# 214-S-7061

FOR USE IN COMMERCIAL SHIPYARDS ONLY


## Marine Antifouling Paint

Manufactured by AMERON INTERNATIONAL

### Keep Out of Reach of Children WARNING

See side panel for precautionary statements  
VOC - 434 GPL (3.62 Lb/Gal)  
Do not thin inconsistent with local VOC regulations  
**PAINT: UN 1263**  
EPA Reg. No. 8120-55 EPA Est. No. 8120-AR-1

Active Ingredients\*  
Cuprous oxide.....38.46%  
Inert Ingredients.....61.54%  
100.00%  
\*Equivalent to 34.15% Metallic Copper  
Contains Petroleum Distillates

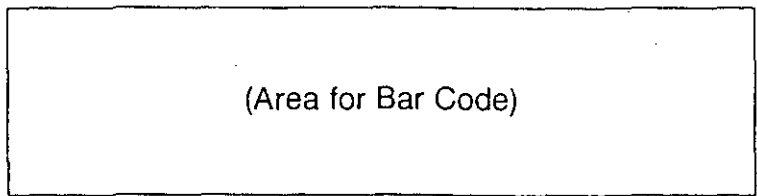

(Area for Bar Code)

**Precautionary Statements - HAZARDS TO HUMANS (and Domestic Animals):** Warning! Vapor and spray mist can be harmful; irritating to eyes, skin, mucous membranes and respiratory system. Can cause headache, nausea, dizziness, asphyxiation or lung injury. Can be harmful if inhaled or swallowed. Possible eye and skin burns or injury. Overexposure to spray mist can damage kidneys, liver and blood. **FIRST AID - If inhaled:**

- Move person to fresh air.
- If person is breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth to mouth, if possible.

**If on skin or clothing:**

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.

**If in eyes:**

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.

**If swallowed:**

- Call poison control center or doctor immediately for treatment advice.
- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

**Hygienic practices** - Wash thoroughly after use and before eating, smoking or using washroom. Keep away from feed or food products. Launder contaminated clothing before use.

**Physical or Chemical Hazards:** Flammable. Keep away from heat, sparks, arc and open flame. Avoid breathing vapor, dust, spray mist or contact with eyes and skin. Use adequate ventilation during mixing, application and drying. Reports associate repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Wear protective equipment such as goggles.

Ameron Coatings  
11805 Vimy Ridge Road  
Little Rock, AR 72209 USA

**NOTE** This product contains a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

**ENVIRONMENTAL HAZARDS** This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

**CHEMICAL AND PHYSICAL HAZARDS** Do not use or store near heat or open flame.

**DIRECTIONS FOR USE** It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

For application to underwater areas of steel, aluminum, fiberglass or wood vessels subject to fouling by barnacles, algae, tube worms and other fouling organisms. Surface to be coated should be clean of grease, oil, dirt and moisture. Do not apply directly to metal surfaces. A suitable barrier coat should be applied to steel and aluminum surfaces. Apply by spray, brush or roller. For spray, airless spray is strongly recommended. When spraying, applications must use appropriate NIOSH approved respirators. Protective clothing, rubber gloves and goggles should be worn by applicators. Contaminated clothing should be laundered before reuse. Clean up with T-10 thinner. Launching may be accomplished as soon as coating is dry, or later if desired.

**STORAGE AND DISPOSAL** Do not contaminate water, food or feed by storage or disposal.

**Pesticide Disposal** - Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**Container Disposal** - Triple rinse (or equivalent) and offer for recycling of reconditioning, or dispose of in a sanitary landfill, or by other approved State and local procedures.

Net Contents: **5 U.S. Gallons (18.93 Liters)**

orm MAF-7061-J5 (8/01) Manufactured in U.S.A. See other cautions on side panel and MSDS. Use only in accordance with instructions accompanying shipment.

**Emergency** (In case of spills or leaks) **CHEMTREC (800) 424-9300**



W  
8  
W