

8177-3

12/16/2008

1/12



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
Washington, D.C. 20460

OFFICE OF
PREVENTION, PESTICIDES
AND TOXIC SUBSTANCES

December 16, 2008

Georgia Anastasiou
Lewis & Harrison Consultants
The Agent for
Valspar Corporation
122 C. Street, N.W., Suite 740
Washington, DC 20011

Subject: Product Name: Enterprise Clear wood Preservative
EPA Reg. Number: 8177-73
Application Date: 04-Dec-2008
Receipt Date: 04-Dec-2008

Dear Ms. Anastasiou:

The following amendment, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), as amended, is acceptable.

Proposed Amendment:

- Review labeling per EPA letter dated 11/17/08.

General Comments:

A stamped copy of the label is enclosed for your records. Note that the Agency is moving away from review of paper submitted registration applications to electronic review of applications. Therefore, we need your help to make this an efficient and convenient process for both you and the Antimicrobials Division. Accordingly, we are asking you to submit future labeling amendments for this product via the electronic labeling process. Refer to the following website for guidance on electronic submissions, including label:

<http://www.epa.gov/oppfead1/eds/esrguidance.htm#overallsub>. If you have questions concerning electronic labeling, a list of contacts is available at the following site:

<http://www.epa.gov/oppfead1/eds/edsgoals.htm#contacts>.

2
12

If you have further questions concerning this letter, please contact me by telephone at (703) 308-6422 or by e-mail at heyward.adam@epa.gov or Killian Swift by telephone at (703) 308-6346 or by email at swift.killian@epa.gov during the hours of 8:00 am to 4:00 pm EST. When submitting information or data in response to this letter, a copy of this letter should accompany the submission to facilitate processing.

Sincerely,



Adam Heyward
Product Manager (34)
Regulatory Management II
Antimicrobials Division (7510P)

Enclosure: Stamped labeling

3/12

NOTE TO REVIEWER: The underlined language is used to provide additional detail particular to each formula. Language in [] is considered optional or interchangeable.

[Front panel]

- WOOD PRESERVATIVE
- DEEP PENETRATING
- WATER REPELLENT
- SUPERIOR DURABILITY


ENTERPRISE CLEAR WOOD PRESERVATIVE

CLEAR SOLUTION®

[A TRANSLUCENT OIL FINISH FOR DECKS, SIDING, FENCES AND TRIM]

AUSTRALIAN TIMBER OIL®

[FOR DECKS, RAILINGS, STAIRS AND OUTDOOR FURNITURE]
[THREE WAY OIL PROTECTION. TUNG, LINSEED, ALKYD]

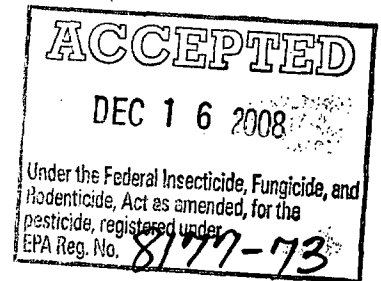

SEMI-TRANSPARENT OIL FINISH

[SEMI-TRANSPARENT OIL]
[SEMI-TRANSPARENT FINISH]
[SEMI-TRANSPARENT PRESERVATIVE]
[ENHANCES THE NATURAL BEAUTY OF WOOD GRAIN]
[PENETRATING WOOD PRESERVATIVE FOR SIDING, FENCES & TRIM]
[PENETRATING OIL THAT ENHANCES THE NATURAL BEAUTY OF WOOD]
[SUPERIOR U.V. PROTECTION FOR WOOD SIDING, TRIM & FENCES]
[SEMI-TRANSPARENT SIDING FINISH]

SEMI-SOLID® OIL FINISH

[SEMI-SOLID® OIL]
[SOLID COLOR OIL SIDING FINISH]
[SEMI-SOLID® SIDING FINISH]
[[SEMI-SOLID® PRESERVATIVE]
[EXTRA PIGMENTED FOR PROTECTION OF WOOD SIDING, TRIM & FENCES]
[U.V. PROTECTION & WOOD PRESERVATIVE FOR SIDING, FENCES & TRIM]

DECKING FINISH

[SEMI-SOLID DECKING FINISH]
[DECKING OIL]
[DECKING PRESERVATIVE]
[DURABLE SEMI-SOLID FINISH-MADE TO BE WALKED ON]
[DURABLE SEMI-SOLID WOOD PRESERVATIVE-MADE TO BE WALKED ON]
[SEMI-SOLID® FINISH]
[SEMI-SOLID® OIL DECKING FINISH]

4
12

NOTE TO REVIEWER: The und ed language is used to provide additional detail, particular to each formula. Language in [] is considered optional or interchangeable.

OVT® SOLID COLOR OIL FINISH

[SOLID COLOR SIDING FINISH]

[SOLID COLOR OIL]

[SOLID COLOR OIL FINISH]

[SOLID COLOR OIL SIDING FINISH]

[SOLID COLOR PRESERVATIVE]

[LONG LASTING OPAQUE FINISH FOR WOOD SIDING, TRIM & FENCES]

SOLID COLOR OIL DECKING FINISH

[SOLID COLOR DECKING FINISH]

[SOLID COLOR OIL DECKING]

[SOLID COLOR DECKING PRESERVATIVE]

[FOR ALL DECKS, RAILINGS & OUTDOOR FURNITURE]

[FOR ALL DECK SURFACES, RAILINGS, STAIRS AND OUTDOOR FURNITURE]

5
12

NOTE TO REVIEWER: The und ed language is used to provide additional detail, particular to each formula. Language in [] is considered optional or interchangeable.

KEEP OUT OF REACH OF CHILDREN

WARNING!

COMBUSTIBLE LIQUID AND VAPOR

See back panel for additional precautionary statements.

Active Ingredients:

3-Iodo-2-Propynyl Butyl Carbamate.....0.57%

Inert Ingredients.....99.43%

TOTAL.....100.00%

Contains petroleum distillates

EPA Reg. No. 8177-73

EPA Est. No. 8177-MA-001

Net Contents: 1 gallon, 3.78 liters

[Back Panel]

CLEAR SOLUTION®

GENERAL INFORMATION:

Clear Solution is formulated with a blend of resin and oil to provide a natural finish for bare wood. Easy to apply, Clear Solution slightly darkens wood when first applied leaving a flat, translucent-toned finish, which weathers with time to a natural wood hue. For use on new or reconditioned exterior wood only, including decks, siding, shingles, shakes, trim and on log homes.

AUSTRALIAN TIMBER OIL®

GENERAL INFORMATION:

Cabot Australian Timber Oil® is a unique blend of oils originally formulated to protect dense Australian tallowwood, cambara and merbau from extreme exposures. It is a proven translucent oil treatment that is specially formulated for decks and outdoor furniture. Penetrates deep into woods to accentuate natural wood depth and patina. Containing a precise blend of superb-grade linseed oil for maximum penetration, long-oil alkyds for durability and pure Tung oil for color depth and water repellency, it delivers three-way oil protection. In addition, complex translucent iron-oxide pigments are added to ensure a lasting U.V.-absorbing surface rich with color and dimension.

NOTE TO REVIEWER: The und ed language is used to provide additional detail. Particular to each formula. Language in [] is considered optional or interchangeable.

SEMI-TRANSPARENT OIL FINISH

GENERAL INFORMATION:

Cabot Semi-Transparent Finish is a deep-penetrating, oil based finish that beautifies and protects exterior wood. Water repellent, mildew-resistant, and when properly applied, won't crack, peel or blister. For use on exterior wood siding, shingles, shakes and roofs. Especially effective on rough-sawn surfaces. Not for use on decks.

SEMI-SOLID® OIL FINISH

GENERAL INFORMATION:

Cabot Semi-Solid® Finishes are richly pigmented, deep penetrating oil based finishes that provide long lasting beauty and wood protection. These unique finishes provide greater hiding power than semi-transparent finishes, yet their attractive flat finish highlights the natural beauty of the wood's texture. Cabot Semi-Solid Finishes can be used on most types of smooth and rough exterior wood, including siding, shingles, fences, log homes and roofs. They provide excellent results on weathered wood and well-seasoned lumber. Not for use on decks.

DECKING FINISH

GENERAL INFORMATION:

Cabot Decking Finish has an alkyd resin base that provides an extremely tough and scuff-resistant finish. Use this extremely durable finish on all types of wood decking and fencing.

OVT® SOLID COLOR OIL FINISH

GENERAL INFORMATION:

Cabot Solid Color Oil Finish contains a blend of tough alkyd resin and linseed oil and offers tremendous hiding power, yet resists cracking, peeling and blistering. For use on most types of smooth and tough exterior wood, including siding, shingles, shakes and trim. Not for use on decks.

SOLID COLOR OIL DECKING FINISH

GENERAL INFORMATION:

Cabot Solid Color Decking Finish combines maximum color and U.V. protection with a tough alkyd resin. The results are a completely opaque finish that imparts lasting beauty and is formulated to withstand foot traffic and wear. For use on exterior wood decks, railings and outdoor furniture.

7
12

NOTE TO REVIEWER: The underlined language is used to provide additional detail particular to each formula. Language in [] is considered optional or interchangeable.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Apply this product only as specified on the label.

Application Instructions:

CLEAR SOLUTION®

Stir product thoroughly before using. Apply only with a natural bristle brush or pad to horizontal surfaces. Apply with natural bristle brush or professional spray equipment on vertical surfaces. Start at one edge and follow through to the end of the boards to avoid lap marks.

AUSTRALIAN TIMBER OIL®

Stir thoroughly before and occasionally while using. Intermix containers of the same color. Optimal results are achieved by using a pure lambswool applicator. Apply to small sections at a time (2-3 boards) to avoid lap marks. One coat is recommended.

SEMI-TRANSPARENT OIL FINISH

Shake before and stir thoroughly during use. Intermix all containers of the same color. Apply with a natural bristle brush or professional spray equipment. When spraying, always back-brush immediately to ensure uniformity. Start at one edge and follow through to a logical break. One coat is recommended.

SEMI-SOLID® OIL FINISH

Shake before and stir thoroughly during use. Intermix all containers of the same color. Apply with natural bristle brush or professional spray equipment. When spraying, always back-brush immediately to ensure uniformity. Start at one edge and follow through to a logical break. One coat is recommended.

DECKING FINISH

Stir thoroughly before and occasionally during use. Intermix all containers of the same color. This product must be applied evenly and only with a brush. Apply finish to small sections at a time. To avoid lap marks, start at one edge and follow through to the end of the boards. One coat is recommended.

OVT® SOLID COLOR OIL FINISH

Shake before and stir thoroughly during use. Intermix all containers of the same color. Apply with a high-quality natural bristle brush or professional spray equipment. When spraying, always back-brush immediately to ensure uniformity. Start at one edge and follow through to a logical break. A one-coat application is recommended.

SOLID COLOR OIL DECKING FINISH

Stir thoroughly before and during use. Intermix all containers of the same color. Apply with natural bristle brush, professional spray equipment or roller. When spraying or rolling, always back-brush immediately to ensure uniformity. A one-coat application is generally sufficient to provide protection and longevity. The application of a second coat

NOTE TO REVIEWER: The und ed language is used to provide additional detail. Particular to each formula. Language in [] is considered optional or interchangeable.

will yield maximum coverage and performance, particularly when using dark colors.
Apply second coat within 48 hours of first coat.

Type of Finish: Clear
[Pigmented]

Where to Use:

CLEAR SOLUTION®

For use only aboveground on new or reconditioned exterior wood, including decks, siding, shingles, shakes, trim and on log homes.

AUSTRALIAN TIMBER OIL®

Decks, railings, stairs and outdoor furniture.

SEMI-TRANSPARENT OIL FINISH

For use on exterior wood siding, shingles, shakes and roofs.

SEMI-SOLID® OIL FINISH

For use on most types of smooth and rough exterior wood, including siding, shingles, fences, log homes and roofs.

DECKING FINISH

For use on all types of wood decking and fencing.

OVT® SOLID COLOR OIL FINISH

For use on most types of smooth and rough exterior wood, including siding, shingles, shakes and trim.

SOLID COLOR OIL DECKING FINISH

For use on exterior wood decks, railings and outdoor furniture.

Coverage:

CLEAR SOLUTION®

On smooth surfaces, approximately 400-600 sq.ft. (37.2-55.7m²) per gallon; on rough surfaces, 200-300 sq.ft. (18.6-27.9m²) per gallon.

AUSTRALIAN TIMBER OIL®

On smooth surfaces, approximately 400-600 sq.ft. (37.2-55.7m²) per gallon; on rough surfaces, 250-350 sq.ft. (23.2-32.5m²) per gallon.

SEMI-TRANSPARENT OIL FINISH, SEMI-SOLID® OIL FINISH and OVT® SOLID COLOR OIL FINISH

On smooth surfaces, approximately 450-650 sq.ft. (41.8-60.4m²) per gallon; on rough surfaces, 200-300 sq.ft. (18.6-27.9m²) per gallon.

NOTE TO REVIEWER: The underlined language is used to provide additional detail particular to each formula. Language in [] is considered optional or interchangeable.

9
12

DECKING FINISH

Covers approximately 400-500sq.ft. (37.2-46.4m²) per gallon.

SOLID COLOR OIL DECKING FINISH

On smooth surfaces, approximately 400-500 sq.ft. (37.2-46.4m²) per gallon; on rough surfaces, 250-350 sq.ft. (23.2-32.5m²) per gallon.

Drying Time:

CLEAR SOLUTION[®] and AUSTRALIAN TIMBER OIL[®]

Approximately 24 hours depending on temperature and humidity.

SEMI-TRANSPARENT OIL FINISH, SEMI-SOLID[®] OIL FINISH, OVT[®] SOLID COLOR OIL FINISH and DECKING FINISH

Approximately 24-48 hours depending on temperature and humidity.

SOLID COLOR OIL DECKING FINISH

Approximately 8 hours depending on temperature and humidity.

Cleanup: Clean equipment with mineral spirits.

Surface Preparation: Be sure surface is free of all dirt, mildew stains and loose wood fibers. Surfaces must be sound and absolutely dry (moisture content below 15%). Finish must be able to penetrate wood surface. Prepare unpainted weathered wood with Cabot Problem-Solver[®] Wood Cleaner or Wood Brightener. Previously stained surfaces must be stripped with Cabot Wood Strippers.

GENERAL PRECAUTIONS AND RESTRICTIONS:

DO NOT apply this product in a way that will contact any person or pet.

DO NOT USE on interior surfaces.

DO NOT USE on wood used for food, feed or potable water contact.

DO NOT apply in direct sunlight or on days when air or surface temperatures are below 50°F (10°C).

DO NOT use where dairy and farm animals may come into contact with the treated wood.

Cover desirable plants and shrubs to avoid possible injury.

PRECAUTIONARY STATEMENTS:

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: Causes skin irritation and moderate eye irritation. Do not get on skin or on clothing. Avoid contact with eyes. Wear protective clothing, chemical-resistant gloves and protective eyewear (goggles, face shield, or safety glasses) when handling. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Remove and wash contaminated clothing before reuse.

10
12

NOTE TO REVIEWER: The underlined language is used to provide additional detail. Particular to each formula. Language in [] is considered optional or interchangeable.

USER SAFETY RECOMMENDATIONS

Users should:

- Wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet.
- Remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.

FIRST AID

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

If on skin or clothing:	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
If in eyes:	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
If swallowed:	<ul style="list-style-type: none"> • Immediately call a poison control center or doctor. • Do not induce vomiting unless told so by a poison control center or doctor. • Do not give any liquid to the person. • Do not give anything by mouth to an unconscious person.

In case of emergency call toll free 1-888-345-5732.

NOTE TO PHYSICIAN: Contains petroleum distillate. Vomiting may cause aspiration pneumonia.

Warning: This product contains chemicals known to the State of California to cause cancer.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not apply directly to water or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment washwater or rinsate.

PHYSICAL AND CHEMICAL HAZARDS: DO NOT USE, POUR SPILL OR STORE NEAR HEAT OR OPEN FLAME. PROTECT FROM FREEZING.

NOTICE --- SPONTANEOUS COMBUSTION HAZARD: RAGS, STEEL WOOL OR WASTE SOAKED WITH THIS PRODUCT MAY SPONTANEOUSLY CATCH FIRE IF IMPROPERLY DISCARDED, IMMEDIATELY AFTER EACH USE, PLACE RAGS, STEEL WOOL OR WASTE IN A SEALED WATER-FILLED METAL CONTAINER.

This product contains less than 350 g/l VOC (2.9 lb/gal VOS)

STORAGE AND DISPOSAL:

Pesticide Storage: Store product in original container within locked storage area.

Pesticide and Container Disposal: Dispose of container and any unused product by securely wrapping container in several layers of newspaper. Then discard in trash. DO NOT REUSE CONTAINER.

11
12

NOTE TO REVIEWER: The unc hed language is used to provide additional detail particular to each formula. Language in [] is considered optional or interchangeable.

LIMITED WARRANTY

If this product does not perform as stated on the label after you apply it according to label directions, Valspar will either replace this product or refund its purchase price, at its option. Valspar disclaims all other implied or express warranties. Valspar will not provide or pay for labor for removal or application of the product. This warranty excludes all incidental or consequential damages. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

Cabot®
The Valspar Corporation
Newburyport, MA 01950
© 2007 Valspar

12
12

NOTE TO REVIEWER: The unc hed language is used to provide additional detail particular to each formula. Language in [] is considered optional or interchangeable.

[Optional Color/Tints]

- Amberwood
- Barn Red
- Cape Cod Grey
- Cedar
- Clear
- Cordovan Brown
- Deep Base
- Driftwood Grey
- Dune Grey
- Heartwood
- Honey Teak
- Jarrah Brown
- Mahogany Flame
- Medium Base
- Mission Brown
- Natural
- Neutral Base
- New Cedar
- New Redwood
- Pacific Redwood
- Redwood
- Ultra White
- Weathered Gray
- White [Base]