

Page 10/1 2 = 117-7 11. 23

**BEST AVAILABLE COPY**

since 1806  
**Valspar**

# Marine Bottom Anti-fouling


For professional results on wood, metal or fiberglass surfaces

1. Prep

2. Prime

3. Finish

4. Trim

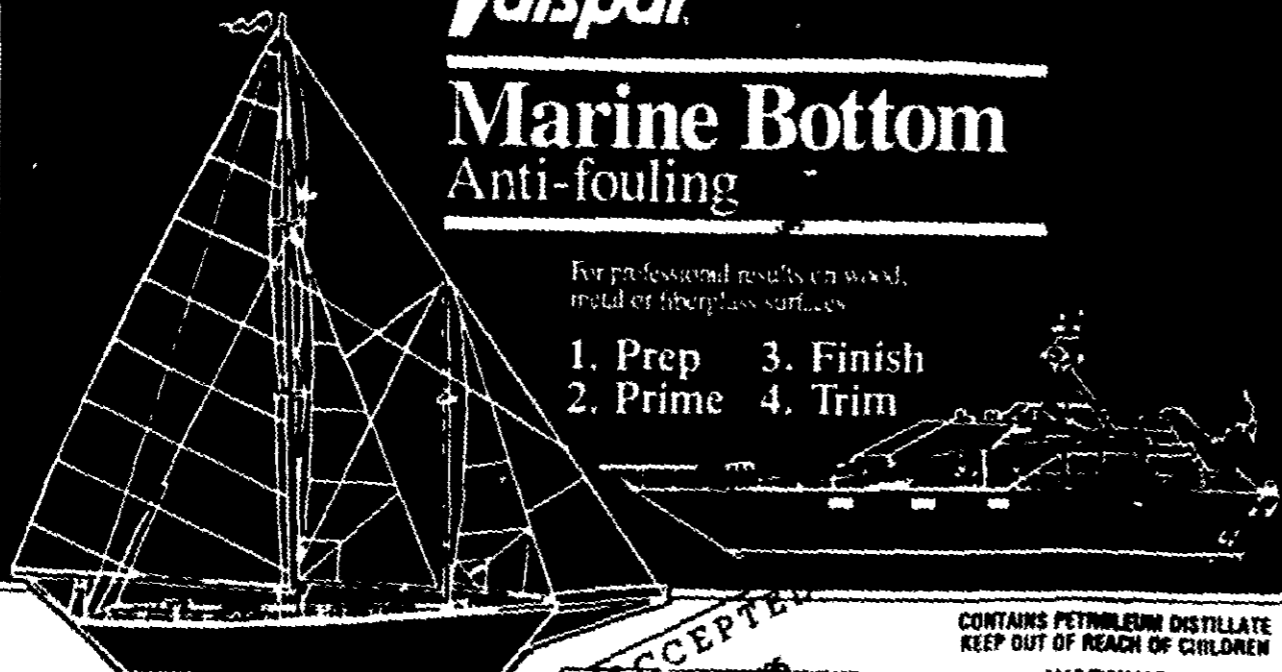

Active Ingredient  
Cuprous Oxide .19.00%

Inert Ingredients .81.00%

100.00%

EPA REG NO 8177-7  
EPA EST NO 8177-IL-1

**ACCEPTED**

JAN 15 1985

3589 **Red Copper**

CONTAINS PETROLEUM DISTILLATE  
KEEP OUT OF REACH OF CHILDREN

**WARNING!**  
VAPOR HARMFUL  
See Each Panel For Additional  
Precautionary Statement

128 Fl. Ozs. (1 Gallon) 3.785 Liters

since 1806  
**Valspar**

## Marine Bottom Anti-Fouling

**STATEMENT OF PRACTICAL TREATMENT IF SWALLOWED:** Promptly drink a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

**PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS IN DOMESTIC ANIMALS:**

**WARNING**

**IF IN EYES:** Flush with plenty of water. Get medical attention.

**IF ON SKIN:** Wash with plenty of soap and water. Get medical attention.

**IF SWALLOWED:** Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**ENVIRONMENTAL HAZARDS:** This material is toxic to fish. Do not apply directly to water. Do not allow equipment or disposal of wastes. Do not allow chips and dust generated during sanding to enter water. Dispose of paint chips in an approved land fill.

**PHYSICAL OR CHEMICAL HAZARDS:**

**COMBUSTIBLE!**  
Keep Away from Heat, Open Flame or Sparks  
Use Only with Adequate Ventilation

Reports have been received and prolonged experimental observations to patients with abnormal brain and nervous system damage.

**NOTICE:** Intentional misuse by concentrating and inhaling the contents can be harmful or fatal.

since 1806  
**Valspar**

## Marine Bottom Anti-Fouling

Formulated with a long life-form base and chlorine active for anti-fouling action in a permanent coat. For use on wood, metal or fiberglass surfaces. Best performance in fresh water. Contains anti-fouling action, partly attributable to copper and zinc. For best results, use by application of material for periods of 48 hours or longer.

**DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**DISPOSURE INSTRUCTIONS:** This product and/or waste material that cannot be used according to the label should be disposed of according to Federal or approved state procedures under Subtitle C of the Comprehensive and Recovery Act. Do not burn, dump, or otherwise dispose of this product or its contents in a sanitary landfill, or in other regulated areas and local procedures.

Preparation	Prime	Finish
<p><b>Preparation:</b> Clean the surface to be treated. Remove all old paint, rust, dirt, and debris. Sand the surface smooth. Wash with clean water and allow to dry.</p>	<p><b>Prime:</b> Apply a thin coat of Valspar Marine Bottom Anti-Fouling to the prepared surface. Allow to dry for 24 hours.</p>	<p><b>Finish:</b> Apply a second coat of Valspar Marine Bottom Anti-Fouling to the primed surface. Allow to dry for 24 hours.</p>
<p><b>Trim:</b> After the finish coat has dried, trim the edges of the paint with a sharp utility knife. Remove any excess paint and smooth the edges.</p>		

**SPECIALTY DIVISION**  
The PPG Industries, Inc.