

Valspar

ANTI-FOULING BOTTOM PAINT

*Active Ingredient
 Copper Powder 36.2%
 Copper Oxide 56%
 Inert Ingredients 83.24%
 100.00%

CONTAINS
 PETROLEUM
 DISTILLATE

KEEP OUT OF REACH
 OF CHILDREN

WARNING!

SEE BACK PANEL FOR
 ADDITIONAL PRECAUTIONARY STATEMENTS

E.P.A. REG. NO. 8177-11
 E.P.A. EST. NO. 8177-1L-1

NET 32 FL OZ (ONE QUART) **3594 ESCOLUX BRONZE** 0.945 LITERS

ESCOLUX BRONZE

Provides Protection
 Against Barnacles, Tored
 As Algae, Easy

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (A DOMESTIC ANIMALS)

Avoid eye irritation. Avoid contact with skin. Avoid breathing vapors. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and a hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying hold or handle the boat properly, make a mark or indicator clearly approved by the Marine Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash hands thoroughly with soap and water after handling.

STATEMENTS OF PRACTICAL TREATMENT

IF SWALLOWED: Promptly drink a large quantity of milk, egg white, gelatin solution or, if these are not available, drink large quantities of water, sweet alcohol. Get medical attention.
IF IN EYES: Flush with plenty of water. Get medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint chips in an approved land fill.

PHYSICAL OR CHEMICAL HAZARDS FLAMMABLE

Keep away from heat.
 Low flame or fumes

It is a volatile product as a labeling

This product that cannot Federal or a subtitle C. Necessary to Triple rinse cycling or a dispose of a other approved

REPAIRING similar compounds, well, sand coats of each finish is in

to bare parts repairs and TIM MOORE for your WOODS Caulk face smooth with mineral should be applied first coat of of mineral primer coat. lightly and unthinned.

FRIBGLASS set. Finishes glass thoro Valspar Valspar coats of Valspar primer to

ADDITIONAL PRECAUTIONARY STATEMENTS
 SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS


The Yc

JAN 6 1983

8. 7. 11

Valspar

ANTI-FOULING BOTTOM PAINT

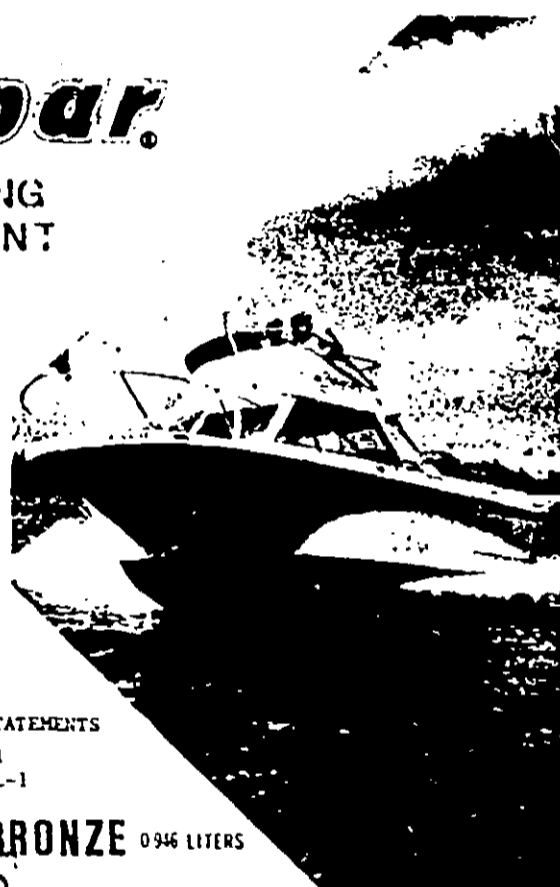

*Active Ingredient
Copper powder 36.2%
Copper Oxide 55%
Inert ingredients 63.2%
100.0%

CONTAINS
PETROLEUM
DISTILLATE

KEEP OUT OF REACH
OF CHILDREN.

WARNING!

SEE BACK PANEL FOR
ADDITIONAL PRECAUTIONARY STATEMENTS

E.P.A. REG. NO. 8177-11
E.P.A. EST. NO. 8177-11-1

3594 ESCOLUX BRONZE 0.946 LITERS

ESCOLUX BRONZE ANTI-FOULING BOTTOM PAINT

Provides Protection Against Marine Growth Such As
Barnacles, Toredoes and Fresh Water Growth Such
As Algae. Easy Application

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS (IF DOMESTIC ANIMALS)

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, impervious cotton shirt, long pants and a hat. Do not eat, drink or smoke. Do not breathe vapor or spray mist. After spraying paint by hand, wash the best surface, wash a mask or respirator (initially approved by the Valspar Laboratories and Safety Administration and the National Institute for Occupational Safety and Health). Remove contaminated clothing and wash before reuse. Wash hands thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Promptly drink a large quantity of milk, egg white, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.
IF IN EYES: Flush with plenty of water. Get medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dross generated during paint removal to enter water. Disposal of paint waste to an approved land fill.

PHYSICAL OR CHEMICAL HAZARDS

Flammable
Very toxic free base.
Low flame at bottom

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with the labeling.

DISPOSAL INSTRUCTIONS

This product and/or rinse material that cannot be used according to label instructions must be disposed of according to Federal or approved state procedures under subtitle C of the Resource Conservation and Recovery Act.

Triple rinse containers. Offer for recycling or reconditioning, or for disposal in a sanitary landfill, or by other approved state and local procedures.

REPAINT WORK: If previous finish is of similar composition in good condition, clean well, sand lightly and apply two or more coats of Escolux Bronze Bottom Paint. If old finish is in questionable condition, remove to bare surface. Make any necessary surface repairs and proceed as for New Work.

NEW WORK: Prepare surface as recommended for your specific type of New Work.

WOOD: Caulk and fill all cracks. Sand the surface smooth. Remove sanding dust by wiping with mineral spirits. Escolux Bottom Paint should be applied directly to wood. Apply first coat of Escolux thinned with one part of mineral spirits per gallon of paint as the primer coat. Allow six hours dry time. Sand lightly and apply two or more top coats unthinned.

GLASS: Scrub surface with foaming cleanser. Rinse well and allow to dry. Sand fiberglass thoroughly to remove gloss. Wash with Valspar Vinyl Thinner #1080. Apply one or two coats of Valspar Fiberglass Primer #1087. Allow primer to dry and sand lightly.

ALUMINUM: Scrub surface with foaming cleanser. Rinse well and allow to dry. Sand to remove any oxidation or other contaminants. Remove dust by washing with Valspar Vinyl Thinner #1080. Prime surface by applying one coat of Valspar Vinyl Wash Primer #1086 reduced equally by volume with Valspar Vinyl Primer #1089.

Primer #1089. Allow primer system to dry one hour, but not more than six hours. Then apply two coats of Valspar Vinyl Fine Chrome Primer #1086 allowing at least three hours dry time between each coat and before top coating. **STEEL:** Sandblast surface to white metal, wash with Valspar Vinyl Thinner #1080, then proceed with priming as described under ALUMINUM.

APPLICATION: Apply three or four coats of Escolux Bottom Paint by brush or spray. Allow 6 hours dry time between coats. Apply below water line only. For clean up and thinning use mineral spirits.

SPREAD RATE: up to 100 square feet per gallon.

DRYING TIME: Touch free—1 hour. Recoat—6 hours. To launch—after 48 hours and within one week of final coat.

SPECIAL NOTES: Contains Copper. Always check primer coat on metal coats to be sure that it is free of pinholes and holidays to prevent electrolysis between dissimilar metals. Stir paint thoroughly before using and periodically while applying to keep the copper in solution. For maximum anti-fouling action, yearly maintenance is suggested.

ANALYSIS

3394	
Pigment - 37.0%	
Copper Bronze Powder	100.0%
Vehicle - 63.0%	
Petroleum Hydrocarbons	18.5%
Turb Oil	17.7%
Hydrogenated Rosin Ester	8.5%
Aliphatic Hydrocarbons	55.3%
Aromatic Hydrocarbons	4.3%
	155.0%

NOTE: Color shown on lid approximates color in can and is not a guarantee of an exact color match.

The Valspar Corporation
MINNEAPOLIS, MINNESOTA 55415

JAN 6 1983

8. 7-11