
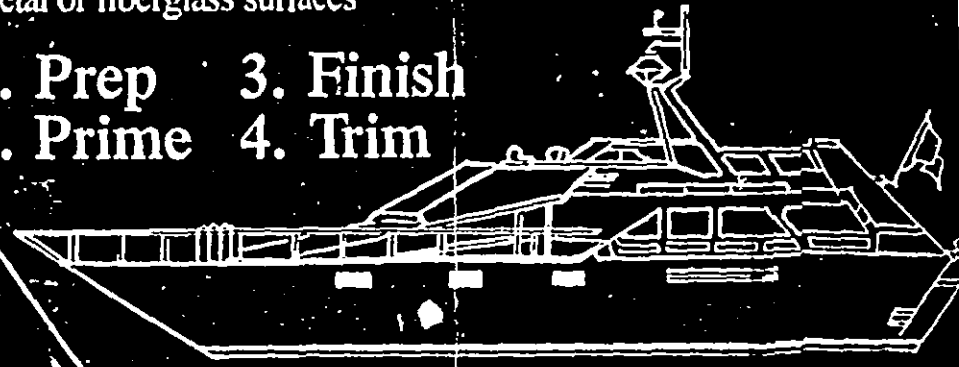


since 1806
Valpar

Marine Bottom Anti-fouling

For professional results on wood,
 metal or fiberglass surfaces

1. Prep
2. Prime
3. Finish
4. Trim

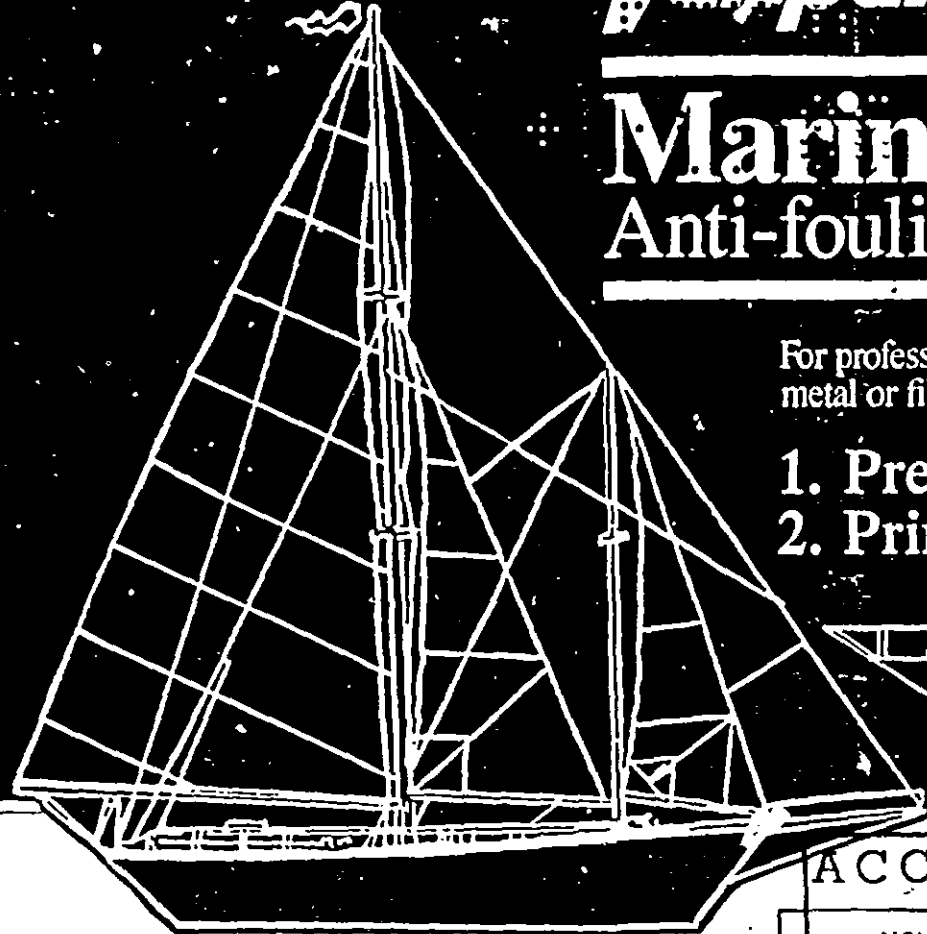

27-3537

PIGMENT 27.9%	
Silicates	42.7
Pr.thalocyanine	
Blue	7.8
Titanium Dioxide	25.6
Zinc Oxide	23.9
	100.0%
VEHICLE 72.1%	
Aromatic	
Hydrocarbons	12.3
Glycol Ethers	22.6
Ketones	27.1
Vinyl Resin	11.9
Rosin	7.9
Tributyltin	
Fluoride (95%)	17.2
Additives	1.0
FD090784-1-4	100.0%

* Active Ingredient
 Tributyltin Fluoride 11.7%
 Inert Ingredients 88.3%
 (Tin as Metal 4.39%) ; 100.0%

ACCEPTED

NOV 06 1986

Under the Federal Insecticide,
 Fungicide, and Rodenticide Act,
 as amended, for the pesticide
 registered under
 EPA Reg. No. 8177-19

3537 Vinyl Coco Blue

KEEP OUT OF REACH OF CHILDREN
DANGER!

See Back Panel For Additional
 Precautionary Statement

1 Gallon (128 FL. OZS.)
 128 FL. OZS. (1 Gallon) 3.785 Liters

E.P.A. REG. NO. 8177-19 E.P.A. EST. NO. 8177-IL-1

CONTAINS PETROLEUM DISTILLATES

Since 1806
Valspar

Marine Bottom Vinyl Anti-Fouling

A superior vinyl anti-fouling bottom paint for protection against toradoes, barnacles and algae in both salt and fresh water. A "dry" formulation that allows application before winter storage without losing anti-fouling properties. Excellent for boats that are to be trailered.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.
STORAGE AND DISPOSAL: Do not contaminate water, food or feed by storage or disposal. **STORAGE:** Keep container closed when not in use. Do not use or store inside home. Do not transfer to other containers for storage. **PESTICIDE DISPOSAL:** Securely wrap original container in several layers of newspaper and discard in trash. **CONTAINER DISPOSAL:** Do not reuse container. Rinse thoroughly, before discarding in trash.

STATEMENT OF PRACTICAL TREATMENT IF SWALLOWED: Promptly drink a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

IF IN EYES: Flush with plenty of water. Get medical attention.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS
This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved land fill.

PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE!
Keep Away From Heat, Open Flame or Sparks.
Use Only with Adequate Ventilation.

Note: When anti-fouling bottom paint is used, some growth should be expected if the boat is left standing without movement over prolonged periods of time. This growth will detach naturally once the boat has been brought up to a speed of 3 knots

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS (& DOMESTIC ANIMALS)

DANGER

Corrosive. Causes irreversible eye damage and burns. Harmful if absorbed through skin, swallowed, or inhaled. Do not get on skin, in eyes, or on clothing. Wear goggles, face shield or safety glasses. Wear protective clothing such as long-sleeved cotton shirt, long pants, hat and gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Avoid breathing vapors; spray mist; dust or chips from sanding. While spraying paint or sanding boat surface, wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage.

NOTICE: Intentional misuse by concentrating and inhaling the contents can be harmful or fatal.

	Repaint Surface in Good Condition	Repaint Surface in Poor Condition	New Unpainted Surface
PREP	WOOD • FIBERGLASS • ALUMINUM • STEEL: If previous finish is of similar vinyl composition, clean thoroughly and sand lightly with #150 sandpaper*. Wash with Valspar Marine Thinner #3082 to remove dust. Allow to dry.	WOOD • FIBERGLASS • ALUMINUM: If surface is not of a similar vinyl composition, remove finish to bare surface with Marine Stripper and sand with #150 sandpaper*. Wash surface with Valspar Marine Vinyl Solvent #3080 to remove dust. Allow to dry and then make any necessary surface repairs. STEEL: Sandblast to white metal. Wash with Valspar Marine Vinyl Solvent #3080 to remove dust. Directly proceed to priming to eliminate any possible flash rusting.	WOOD • FIBERGLASS • ALUMINUM • STEEL: Prepare surface as recommended for your specific type of surface as described under "Repaint-Surface in Poor Condition" eliminating only the finish removal step. Steel, however, should still be sandblasted to white metal.
	WOOD • FIBERGLASS • ALUMINUM • STEEL: No priming is required. Proceed to Finish Step.	WOOD: Use only Valspar Marine Vinyl Bottom Paint thinned 10-15% (one pint per gallon) with Valspar Vinyl Solvent #3080, apply one coat by brush or spray and allow 8 hours to dry. Vinyl Bottom Paint must be applied directly to wood. Do not use Undercoaters. Proceed to Finish Step. FIBERGLASS: No primer is required or recommended. Vinyl Bottom Paint must be applied directly to fiberglass. Proceed to Finish Step. ALUMINUM • STEEL: Apply one coat of Valspar Vinyl Wash Primer #3094 reduced equally by volume with Vinyl Primer Reducer #3093. Allow to dry one hour but not more than six hours. Then apply two coats of Valspar Vinyl Zinc Chromate Primer #3084 allowing at least three hours dry time between coats and before topcoating.	
FINISH & PRIME	All Properly Prepared Surfaces		NOTES: 1 - When applying Valspar Vinyl Paint over Poly-Sulphide Sealant, sealant should be fully cured. This is usually 7-10 days. 2 - On Repaint work, always test vinyl bottom paint over old paint to see if it will lift the old finish. If it does, follow instructions under Repaint-Surface in Poor Condition. 3 - For Maximum anti-fouling action yearly maintenance is suggested.
	WOOD • FIBERGLASS • ALUMINUM • STEEL: Apply two or more coats of the Vinyl Bottom Paint by brush or spray at a spread of up to 80 to 100 square feet per quart. Be careful not to overbrush as it may cause a poor or irregular appearing finish with the fast Tack Free dry time. If you have holidays (SKIPS) simply correct with the next application. Allow 8 hours dry time between coats and 48 hours after final coat before launching. Dries Tack Free in 1 hour. For cleanup of equipment and thinning use Marine Vinyl Solvent #3080.		

*Use a mask at all times during sanding or spraying.
Color shown on label approximates color in the can and is not a guarantee of an exact color match.

SPECIALTY DIVISION
The Valspar Corporation
Rockford, Illinois 61108