

ANTI-FOULING CHEMICALS

TOUGH, PROTECTIVE VINYL BASE

NO PRIMER REQUIRED

MAXIMUM RESISTANCE TO ABRASION,

DRIES FAST;

**Vinyl
anti-fouling
for fiberglass,
wood, metal**

ANALYSIS

Pigment—32.6%	
Titanium Dioxide Type IV	14.6%
Zinc Oxide	6.7%
Silicates	11.3%
Vehicle—67.4%	
Vinyl Resin	8.7%
Rosin	5.8%
Ketone	12.2%
Esters	14.5%
Aromatic Hydrocarbons	2.1%
*Tributyltin Fluoride	10.9%
Inerts from Tributyltin Fluoride	6%
	100.0%

VINYL FOULGARD

bottom paint 1 QT. 75-3070
WHITE

DANGER! HARMFUL OR FATAL IF SWALLOWED. FLAMMABLE. VAPOR HARMFUL.
KEEP OUT OF REACH OF CHILDREN.
See other cautions on back panel

*Active Ingredients	10.9%
Tributyltin Fluoride	89.1%
Inert Ingredients	100.0%
(Tin as metal 4.31%)	

Feb. 28, 1973

8177-26

FOR SALT OR FR
APPLIES DIRECTLY
"DRY" FORMULAT

PREVIOUSLY PAINT
in good condition; c
face film is not a v
work.

NEW WORK: Apply
preparation.

Wood:
1. Fill cracks and
2. Do not use a pr
3. Apply a coat of
one gallon of Fou

Fiberglass:
1. Wash surface with
2. Wet sand with m
well, and dry.
3. Wash surface with
4. Do not use a prim
not sand.
5. Recoat with one


Aluminum:
1. Wash surface with
2. Treat surface with
3. Follow immediate
4. Do not sand. App
dry 18 hours.
5. Top coat with this
6. Recoat with one

DRYING TIME: To sa
NOT FOR USE OR ST
DO NOT RE-USE CO
DO NOT CONTAMIN

NET CONTENTS O

EPA REGISTRATION
distributed by M

DANGER! FLAMMABLE
KEEP AWAY FROM
fatal if swallowed. If sw
in eyes, on skin or on cl
with plenty of water fo
through skin. In case
with soap and water. W
apply on window sills,
lainer after each use.

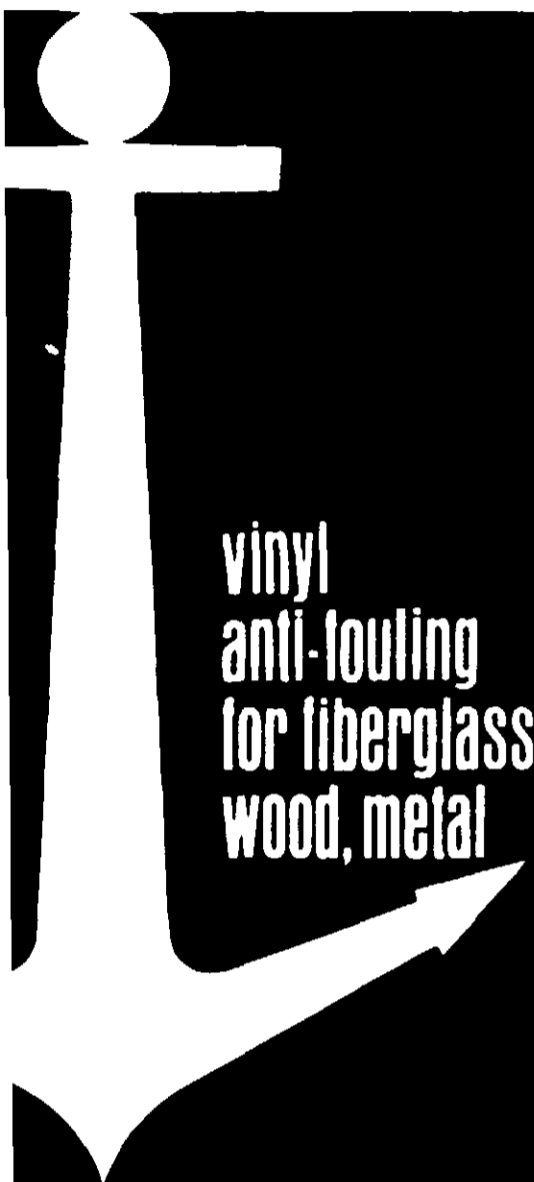

vinyl
anti-fouling
for fiberglass,
wood, metal

ANTI-FOULING CHEMICALS

TOUGH, PROTECTIVE VINYL BASE

NO PRIMER REQUIRED

MAXIMUM RESISTANCE TO ABRASION.

DRIES FAST:

FOULGARD

*Active Ingredients
Tributyltin Fluoride
Inert Ingredients
(Tin as metal 4.31%)

10.9%
89.1%
100.0%

Feb. 28 1973

8177-26

75-3070
WHITE

HAZARDOUS OR FATAL IF SWALLOWED. FLAMMABLE. VAPOR HARMFUL.
KEEP OUT OF REACH OF CHILDREN.
Other cautions on back panel

FOR SALT OR FRESH WATER.

APPLIES DIRECTLY TO FIBERGLASS—no primer should be used.
"DRY" FORMULATION—can be applied before winter storage.

PREVIOUSLY PAINTED SURFACES: If previous coating is of similar vinyl composition and in good condition; clean and apply 2 or 3 coats of Montgomery Ward Foulgard. Where surface film is not a vinyl composition, remove coating to bare surface and proceed as for new work.

NEW WORK: Apply 2 or more coats of Foulgard Anti-Fouling after the following specific preparation.

Wood:

1. Fill cracks and strakes. Sand smooth. Clean and dry the surface.
2. Do not use a primer. Apply this paint directly to clean dry surface.
3. Apply a coat of Foulgard thinned down one pint of Montgomery Ward Vinyl Thinner to one gallon of Foulgard. Allow to dry.

Fiberglass:

1. Wash surface with a foaming cleanser.
2. Wet sand with medium grit "Wet-Or-Dry" sandpaper to completely remove gloss. Rinse well, and dry.
3. Wash surface with Montgomery Ward Vinyl Thinner. Dry.
4. Do not use a primer but apply this paint directly to clean, dry surface. Allow to dry. Do not sand.
5. Recoat with one or more coats as desired.

Aluminum:

1. Wash surface with a foaming cleanser; rinse well and dry.
2. Treat surface with Aluminum Clean & Etch.
3. Follow immediately with a coat of Alodine. Allow to dry by evaporation.
4. Do not sand. Apply a coat of Montgomery Ward Zinc Chromate Primer. Allow primer to dry 18 hours.
5. Top coat with this Foulgard paint. Do not sand.
6. Recoat with one or more coats as desired.

DRYING TIME: To sand and recoat—8 hours; To Launch—48 hours.

NOT FOR USE OR STORAGE IN OR AROUND HOUSE
DO NOT RE-USE CONTAINER. DESTROY WHEN EMPTY.
DO NOT CONTAMINATE WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES.

NET CONTENTS ONE QUART COVERS UP TO 100 SQ. FT. 75P 474P

EPA REGISTRATION NO. 8177-26
distributed by **MONTGOMERY WARD & CO., INC.** Chicago, Illinois 60607

DANGER! FLAMMABLE! CONTAINS TRIBUTYLTIN FLUORIDE TOLUOL AND KETONES. KEEP AWAY FROM HEAT, OPEN FLAME OR SPARKS. Causes severe eye damage. Harmful or fatal if swallowed. If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. Do not get in eyes, on skin or on clothing. Wear goggles or face shield when handling. In case of contact flush eyes with plenty of water for at least 15 minutes and CALL PHYSICIAN IMMEDIATELY. May be absorbed through skin. In case of contact with clothing or skin, remove contaminated clothing and wash skin with soap and water. Wash clothing before re-use. Avoid storage near feed and food products. Do not apply on window sills, toys, furniture or interior surfaces which may be used by children. Close container after each use.

**Use with adequate ventilation.
KEEP OUT OF REACH OF CHILDREN.**