

ANTI-FOULING CHEMICALS

TOUGH, PROTECTIVE VINYL BASE

NO PRIMER REQUIRED

MAXIMUM RESISTANCE TO ABRASION,

DRIES FAST;

FOR SALT OR FRESH APPLIES DIRECTLY TO "DRY" FORMULATION PREVIOUSLY PAINTED in good condition; clean face film is not a vinyl work.

NEW WORK: Apply 2 or preparation.

Wood:
1. Fill cracks and strake
2. Do not use a primer.
3. Apply a coat of Foulgard one gallon of Foulgard

Fiberglass:
1. Wash surface with a
2. Wet sand with medium well, and dry.
3. Wash surface with M
4. Do not use a primer
5. Recoat with one or m

Aluminum:
1. Wash surface with a
2. Treat surface with Alu
3. Follow immediately w
4. Do not sand. Apply a
5. Top coat with this Fou
6. Recoat with one or m

DRYING TIME: To sand NOT FOR USE OR STORAGE DO NOT RE-USE CONTAINER DO NOT CONTAMINATE

NET CONTENTS ONE EPA REGISTRATION NO distributed by MONT

DANGER! FLAMMABLE! KEEP AWAY FROM HEAT fatal if swallowed. If swallowed in eyes, on skin or on clothing with plenty of water for at through skin. In case of contact with soap and water. Wash apply on window sills, toys, tainer after each use.

ANALYSIS

Pigment—31.3%	13.4%
Iron Oxide Class I.	11.2%
Silicates	6.7%
Zinc Oxide	
Vehicle—68.7%	
Vinyl Resin	8.2%
Gum Rosin	5.4%
*Tributyltin Fluoride	10.6%
Inert from Tributyltin Fluoride	.6%
Ketones	19.1%
Esters	16.3%
Aromatic Hydrocarbons	8.5%
	100.0%

VINYL FOULGARD

bottom paint 1 QT. 75-3066 RED OXIDE


DANGER! HARMFUL OR FATAL IF SWALLOWED. FLAMMABLE. VAPOR HARMFUL. KEEP OUT OF REACH OF CHILDREN. See other cautions on back panel

*Active Ingredients
Tributyltin Fluoride 10.6%
Inert Ingredients 89.4%
(Tin as Metal 4.20%) 100.0%

Feb. 28, 1973

8177-29

8177-29

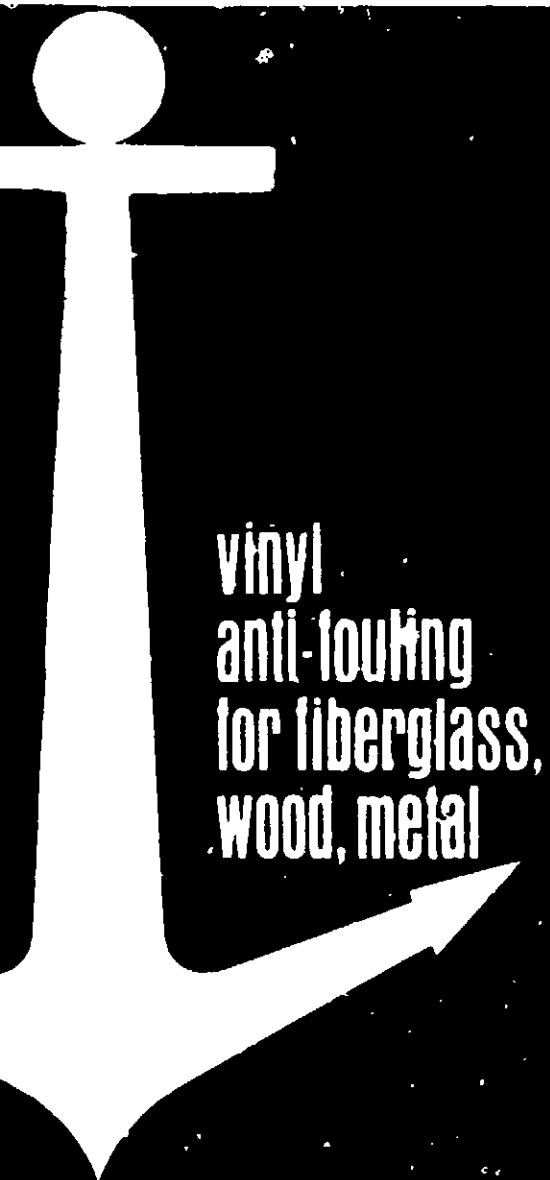

ANTI-FOULING CHEMICALS

TOUGH, PROTECTIVE VINYL BASE

NO PRIMER REQUIRED

MAXIMUM RESISTANCE TO ABRASION

DRIES FAST

FOULGARD

*Active Ingredients
Tributyltin Fluoride
Inert Ingredients

10.6%
89.4%
100.0%

(Tin as Metal 4.20%)

75-3066
RED OXIDE

HARMFUL OR FATAL IF SWALLOWED. FLAMMABLE. VAPOR HARMFUL.

KEEP OUT OF REACH OF CHILDREN.

Other cautions on back panel

Feb. 28, 1973

8177-29

8177-29

FOR SALT OR FRESH WATER.

APPLIES DIRECTLY TO FIBERGLASS—no primer should be used.

"DRY" FORMULATION— can be applied before winter storage.

PREVIOUSLY PAINTED SURFACES: If previous coating is of similar vinyl composition and in good condition; clean and apply 2 or 3 coats of Montgomery Ward Foulgard. Where surface film is not a vinyl composition, remove coating to bare surface and proceed as for new work.

NEW WORK: Apply 2 or more coats of Foulgard Anti-Fouling after the following specific preparation.

Wood:

1. Fill cracks and strakes. Sand smooth. Clean and dry the surface.
2. Do not use a primer. Apply this paint directly to clean dry surface.
3. Apply a coat of Foulgard thinned down one pint of Montgomery Ward Vinyl Thinner to one gallon of Foulgard. Allow to dry.

Fiberglass:

1. Wash surface with a foaming cleanser.
2. Wet sand with medium grit "Wet-Or-Dry" sandpaper to completely remove gloss. Rinse well, and dry.
3. Wash surface with Montgomery Ward Vinyl Thinner. Dry.
4. Do not use a primer but apply this paint directly to clean, dry surface. Allow to dry. Do not sand.
5. Recoat with one or more coats as desired.

Aluminum:

1. Wash surface with a foaming cleanser; rinse well and dry.
2. Treat surface with Aluminum Clean & Etch.
3. Follow immediately with a coat of Alodine. Allow to dry by evaporation.
4. Do not sand. Apply a coat of Montgomery Ward Zinc Chromate Primer. Allow primer to dry 18 hours.
5. Top coat with this Foulgard paint. Do not sand.
6. Recoat with one or more coats as desired.

DRYING TIME: To sand and recoat—8 hours; To Launch—48 hours.

NOT FOR USE OR STORAGE IN OR AROUND HOUSE

DO NOT RE-USE CONTAINER. DESTROY WHEN EMPTY

DO NOT CONTAMINATE WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES.

NET CONTENTS ONE QUART COVERS UP TO 100 SQ. FT. 75P-474P

EPA REGISTRATION NO. 8177-29

distributed by MONTGOMERY WARD & CO., INC. Chicago, Illinois 60607

DANGER! FLAMMABLE! CONTAINS TRIBUTYLTIN FLUORIDE TOLUOL AND KETONES. KEEP AWAY FROM HEAT, OPEN FLAME OR SPARKS. Causes severe eye damage. Harmful or fatal if swallowed. If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. Do not get in eyes, on skin or on clothing. Wear goggles or face shield when handling. In case of contact flush eyes with plenty of water for at least 15 minutes and CALL PHYSICIAN IMMEDIATELY. May be absorbed through skin. In case of contact with clothing or skin, remove contaminated clothing and wash skin with soap and water. Wash clothing before re-use. Avoid storage near feed and food products. Do not apply on window sills, toys, furniture or interior surfaces which may be used by children. Close container after each use.

**Use with adequate ventilation.
KEEP OUT OF REACH OF CHILDREN.**