

ACCEPTED
 Feb. 28, 1973
 UNDER THE PROVISIONS OF THE FEDERAL
 INSECTICIDE AND FUNGICIDE ACT
 FOR ECONOMIC POISON REGISTRATION
 UNDER NO. 8177-30



ANTI-FOULING CHEMICALS

TOUGH, PROTECTIVE VINYL BASE

NO PRIMER REQUIRED

MAXIMUM RESISTANCE TO ABRASION,

DRIES FAST;

FOR SALT OR FRESH WATER
 APPLIES DIRECTLY TO
 "DRY" FORMULATION

PREVIOUSLY PAINTED SURFACES
 in good condition; clear
 face film is not a vinyl
 work.

NEW WORK: Apply 2 coats
 preparator.

Wood:
 1. Fill cracks and
 2. Do not use a primer
 3. Apply a coat of Foulgard
 one gallon of Foulgard

Fiberglass:
 1. Wash surface with
 2. Wet sand with med
 well, and dry.
 3. Wash surface with
 4. Do not use a primer
 not sand.
 5. Recoat with one or

Aluminum:
 1. Wash surface with
 2. Treat surface with
 3. Follow immediately
 4. Do not sand. Apply
 dry 18 hours.
 5. Top coat with this F
 6. Recoat with one or

DRYING TIME: To save
 NOT FOR USE OR STORAGE
 DO NOT RE-USE CONTAINER
 DO NOT CONTAMINATE

NET CONTENTS ONE GALLON
 EPA REGISTRATION NO. 8177-30
 distributed by MORGAN

DANGER: FLAMMABLE
KEEP AWAY FROM HEAT
 fatal if swallowed. If swallow
 with plenty of water for at
 through skin. In case of d
 with soap and water. Wash
 apply on window sills, toy
 tainer after each use.

ANALYSIS

Pigment—28.3%	
Phthalocyanine Green	2.5%
Zinc Oxide	6.7%
Titanium Dioxide Type IV	7.1%
Silicates	12.0%
Vehicle—71.7%	
Vinyl Resin	8.5%
Gum Rosin	5.6%
*Tributyltin Fluoride	11.1%
Inerts from Tributyltin Fluoride	.6%
Ketones	20.0%
Esters	17.1%
Aromatic Hydrocarbons	8.8%
	100.0%

VINYL FOULGARD


bottom paint 1 QT. 75-3074 GREEN

DANGER! HARMFUL OR FATAL IF SWALLOWED. FLAMMABLE. VAPOR HARMFUL.
 KEEP OUT OF REACH OF CHILDREN.
 See other cautions on back panel

Active Ingredients	
Tributyltin Fluoride	11.1%
Inert Ingredients	88.9%
	100.0%

(Tin as Metal 4.39%)

ACCEPTED
 FEB 28 1973
 FOR ORDER NO. 8177-30

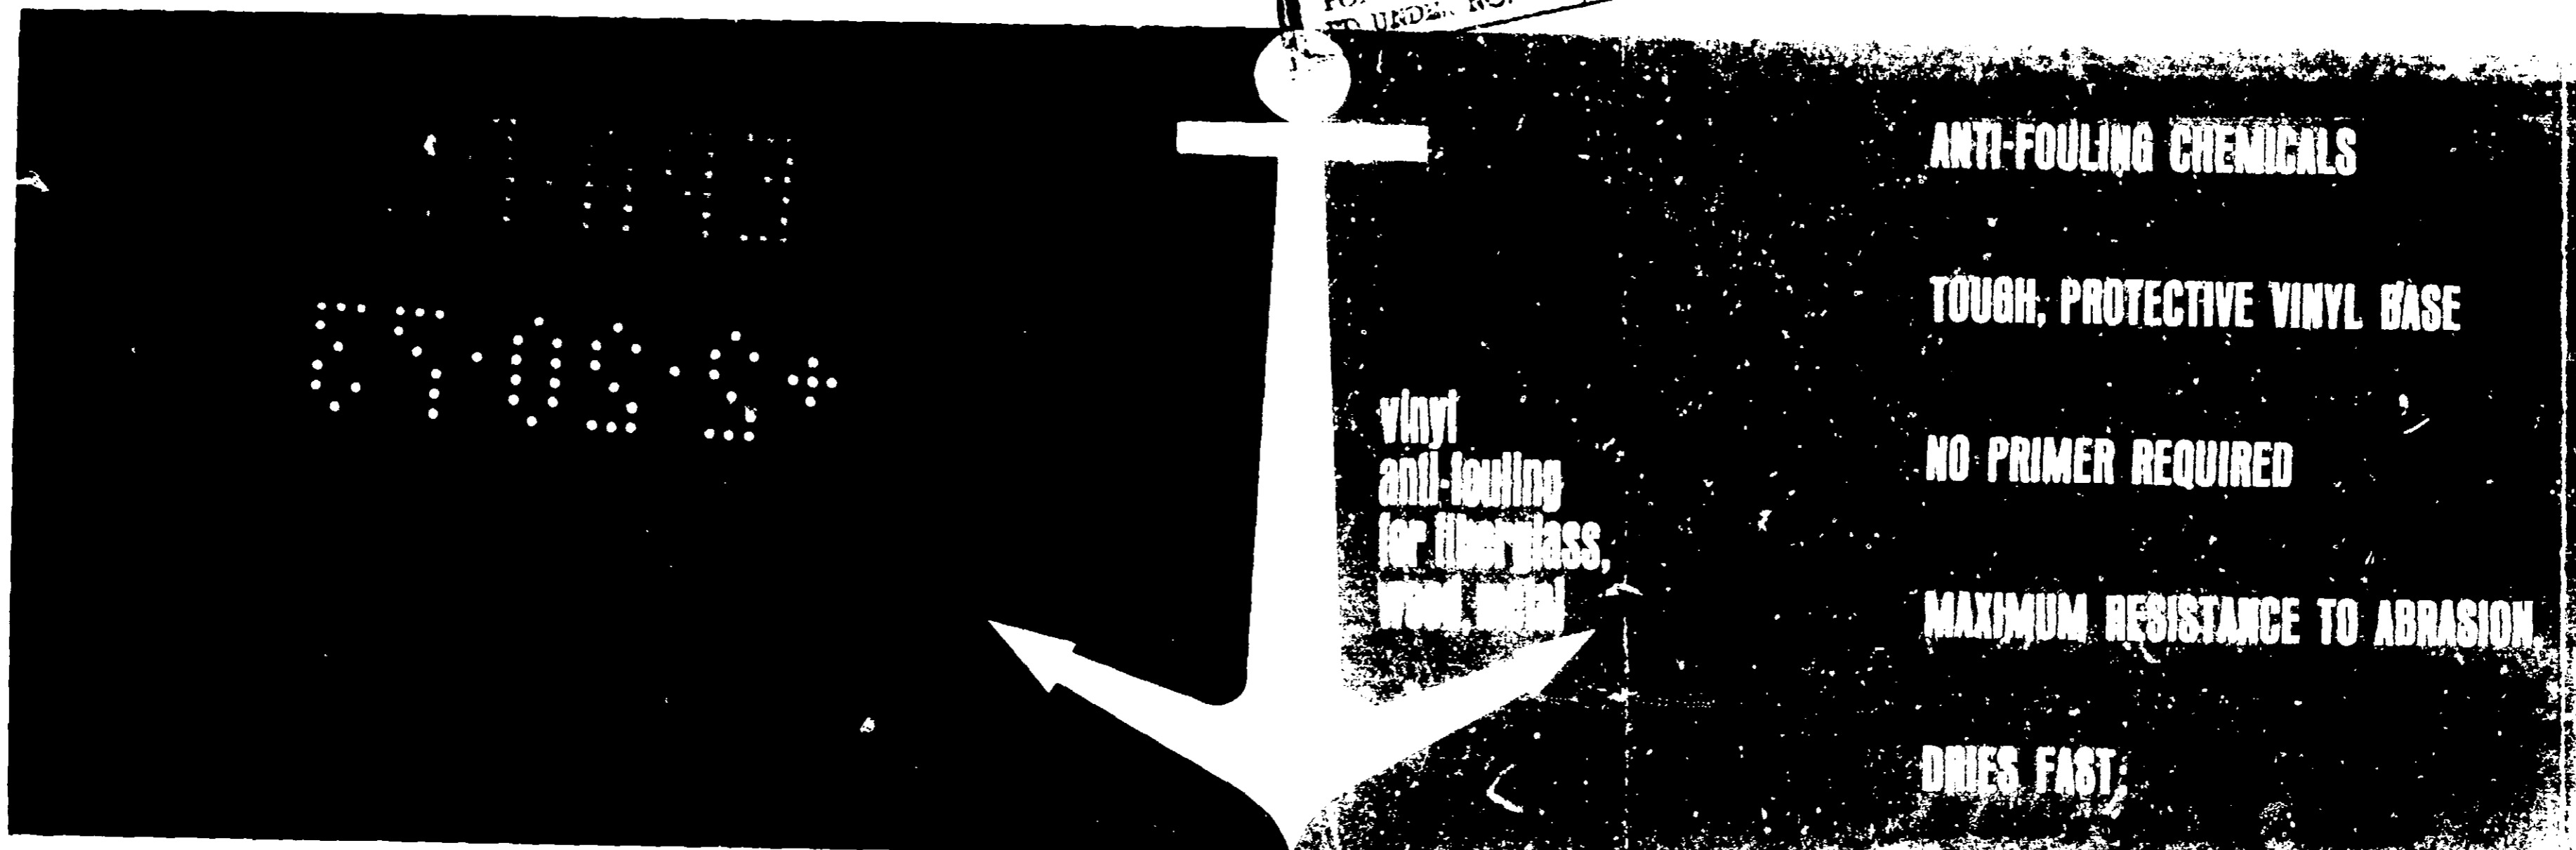

vinyl
 anti-fouling
 for fiberglass,
 wood, metal

ANTI-FOULING CHEMICALS

TOUGH, PROTECTIVE VINYL BASE

NO PRIMER REQUIRED

MAXIMUM RESISTANCE TO ABRASION

DRIES FAST

FOR SALT OR FRESH
 APPLIES DIRECTLY TO
 "DRY" FORMULATION

PREVIOUSLY PAINTED
 in good condition: clean
 surface film is not a vinyl
 work

NEW WORK: Apply 2
 preparator

Wood:
 1. Fill cracks and
 2. Do not use a primer
 3. Apply a coat of Foulgard
 one gallon of Foulgard

Fiberglass:
 1. Wash surface with
 2. Wet sand with med
 well and dry.
 3. Wash surface with
 4. Do not use a primer
 not sand.
 5. Recoat with one or

Aluminum:
 1. Wash surface with
 2. Treat surface with Al
 3. Follow immediately
 4. Do not sand. Apply
 dry 18 hours
 5. Top coat with this F
 6. Recoat with one or

DRYING TIME: To sand
 NOT FOR USE OR STORE
 DO NOT REUSE CONTAINERS
 DO NOT CONTAMINATE

NET CONTENTS ONE
 EPA REGISTRATION
 distributed by **MON**

DANGER! FLAMMABLE
KEEP AWAY FROM HEAT
 fatal if swallowed. If swalle
 in eyes, on skin or on cloth
 with plenty of water for at
 through skin. In case of co
 with soap and water. Wash
 apply to wind shields, toys
 tainer after each use.

ANALYSIS

Pigment (28.5%)	75.00
Extender (15.0%)	15.00
Zinc Oxide	15.00
Titanium Dioxide Type 2	15.00
Silica	15.00
Vehicle (25.0%)	25.00
Vinyl Resin	15.00
Styrene	10.00
Triethylamine	10.00
Diethylene glycol dimethyl ether	10.00
Cellulose	10.00
Ethyl	10.00
Acrylonitrile-butadiene	10.00

VINYL FOULGARD

bottom paint 1 QT. 75-3074 GREEN

DANGER! HARMFUL OR FATAL IF SWALLOWED. FLAMMABLE. VAPOR HARMFUL.
 KEEP OUT OF REACH OF CHILDREN.
 See other cautions on back panel

Active Ingredients	75.00%
Inert Ingredients	25.00%
Total Weight	100.00%

ACC
 Feb. 28, 1973
 UNDER THE FEDERAL INSECTICIDE ACT
 BEING SOLD AND DISTRIBUTED
 FOR ECONOMIC POLICE ALL STATES
 TO UNDER: 8177-30

ANTI-FOULING CHEMICALS

TOUGH, PROTECTIVE VINYL BASE

NO PRIMER REQUIRED

MAXIMUM RESISTANCE TO ABRASION.

DRIES FAST:

vinyl
 anti-fouling
 for fiberglass
 wood, metal

FOR SALT OR FRESH WATER.
 APPLIES DIRECTLY TO FIBERGLASS—no primer should be used.
 "DRY" FORMULATION—can be applied before winter storage.

PREVIOUSLY PAINTED SURFACES: If previous coating is of similar vinyl composition and in good condition; clean and apply 2 or 3 coats of Montgomery Ward Foulgard. Where surface film is not a vinyl composition, remove coating to bare surface and proceed as for new work.

NEW WORK: Apply 2 or more coats of Foulgard Anti-Fouling after the following specific preparation.

- Wood:**
1. Fill cracks and strakes. Sand smooth. Clean and dry the surface.
 2. Do not use a primer. Apply this paint directly to clean dry surface.
 3. Apply a coat of Foulgard thinned down one pint of Montgomery Ward Vinyl Thinner to one gallon of Foulgard. Allow to dry.

- Fiberglass:**
1. Wash surface with a foaming cleanser.
 2. Wet sand with medium grit "Wet-Or-Dry" sandpaper to completely remove gloss. Rinse well, and dry.
 3. Wash surface with Montgomery Ward Vinyl Thinner. Dry.
 4. Do not use a primer but apply this paint directly to clean, dry surface. Allow to dry. Do not sand.
 5. Recoat with one or more coats as desired.

- Aluminum:**
1. Wash surface with a foaming cleanser; rinse well and dry.
 2. Treat surface with Aluminum Clean & Etch.
 3. Follow immediately with a coat of Alodine. Allow to dry by evaporation.
 4. Do not sand. Apply a coat of Montgomery Ward Zinc Chromate Primer. Allow primer to dry 18 hours.
 5. Top coat with this Foulgard paint. Do not sand.
 6. Recoat with one or more coats as desired.

DRYING TIME: To sand and recoat—8 hours; To Launch—48 hours.
 NOT FOR USE OR STORAGE IN OR AROUND HOUSE
 DO NOT RE-USE CONTAINER. DESTROY WHEN EMPTY.
 DO NOT CONTAMINATE WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES.

NET CONTENTS ONE QUART COVERS UP TO 100 SQ. FT. 75P-474P

EPA REGISTRATION NO. 8177-30
 distributed by **MONTGOMERY WARD & CO., INC. Chicago, Illinois 60607**

DANGER! FLAMMABLE! CONTAINS TRIBUTYL TIN FLUORIDE TOLUOL AND KETONES. KEEP AWAY FROM HEAT, OPEN FLAME OR SPARKS. Causes severe eye damage. Harmful or fatal if swallowed. If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. Do not get in eyes, on skin or on clothing. Wear goggles or face shield when handling. In case of contact flush eyes with plenty of water for at least 15 minutes and CALL PHYSICIAN IMMEDIATELY. May be absorbed through skin. In case of contact with clothing or skin, remove contaminated clothing and wash skin with soap and water. Wash clothing before re-use. Avoid storage near feed and food products. Do not apply on window sills, toys, furniture or interior surfaces which may be used by children. Close container after each use.

Use with adequate ventilation.
 KEEP OUT OF REACH OF CHILDREN.

FOULGARD

Active Ingredients	
Tributyltin Fluoride	11.1%
Inert Ingredients	88.9%
(Tin as Metal 4.39%)	100.0%

75-3074
 GREEN
 HARMFUL OR FATAL IF SWALLOWED. FLAMMABLE. VAPOR HARMFUL.
 KEEP OUT OF REACH OF CHILDREN.
 other cautions on back panel