

8177-36 1053 P-21  
UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

343  
17  
300  
17  
126136  
7  
126348  
8  
JUL 31 1984

Valepar Corporation  
1101 3rd St. South  
Minneapolis, MN 55415

Attention: B. C. Heath

Gentlemen:

Subject: Valepar Semi-Transparent Oil Wood Stain & Preservative 6515  
EPA Registration No. 8177-36  
Your Submissions Dated July 6, 1984 and July 25, 1984

In regard to your request dated July 25, 1984, the registration record for the product named above has been amended to include the additional product name, "Colony Rustique Clear Wood Preservative 4791". You must however, add a "Directions for Use" heading to the label before your release the product for shipment.

There is no objection to the use of the alternate formulations requested in your letter of July 6, 1984. The amendments have been inserted in the file for the subject product.

Sincerely yours,


Henry M. Jacoby  
Product Manager (21)  
Fungicide-Herbicide Branch  
Registration Division (TS-767)

bhc:HMLJacoby:07/31/84

CONCURRENCES							
SYMBOL							
SURNAME							
DATE							

BEST AVAILABLE COPY

Colony Rustique

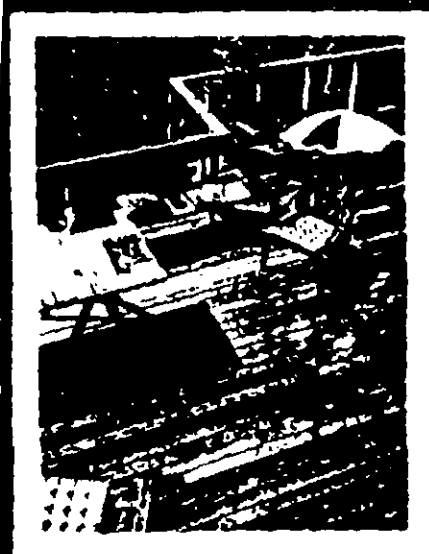

# CLEAR WOOD PRESERVATIVE

- Penetrates Deeply
- Repels Moisture
- Protects Against Rot, Warping and Fungus

Adds extra life to wood siding, decks, fences and outdoor furniture!

KEEP OUT OF REACH OF CHILDREN  
**WARNING!**  
**COMBUSTIBLE!**  
See Back Panel for Additional Precautionary Statements  
EPA Reg. No. 8177-36  
EPA Est. No. 8177-IL-1

Active Ingredients	
Bis (Tributyltin) Oxide	0.50%
Folpet (N-Trichloromethylthiophthalimide)*	0.30%
Inert Ingredient	99.20%
	100.00%

\*With Fungicide Folpet Resists Film Attack by Mildew

Exterior application only. Primarily recommended as a treatment prior to priming and painting. Use as a clear if color protection is not a factor. Not to be used for below grade application. Rustique Clear Wood Preservative adds life to the wood and lets the natural wood grain and texture show through. It penetrates the wood, fights rot and mildew and repels water. Use on new or bare, unsealed exterior wood surfaces such as siding, shakes, shingles and fencing. Do not use on abraded plywood. Meets Spec. TT-W-572b.3.7

Do not top coat with clear finishes.

#### B. PREPARE THE SURFACE CAREFULLY

Make sure surface is clean, dry and free of loose material. New wood with surface glaze must be sanded to allow for penetration.

Do not use over pressure treated or dip treated new wood.

#### C. APPLY PROPERLY

Because this product contains a preservative, stir thoroughly before and during application. Dipping is the preferred method for treating wood which will be in contact with the ground. Apply liberally by brush, roller, spray or dip. Soak end grain thoroughly. Do not allow excess material to pool or puddle on surface. If used prior to priming, apply one coat. Two coats if to be left clear and apply second coat before first coat is dry, or wait 24 hours if wet-on-wet is not possible. If surface is to be painted, use alkyl primer before applying finish coat.

Dries to touch in three to four hours. Wait 24 to 48 hours before painting.

Do not apply when temperature is below 40° F.

#### D. SPREADING RATE

Approximately 150 to 250 sq. ft. per gallon per coat depending on surface condition and application method.

**WARNING! Keep Out Of Reach Of Children.**  
Contains Petroleum Distillate. Harmful or fatal if swallowed. Do not use or store near heat or open flame.

Use only in well ventilated area. Do not breathe vapor or spray mist. Do not get in eyes, or on skin or clothing! Wear rubber gloves and protective clothing when applying or handling freshly treated lumber.

**FIRST AID:** If on skin, wash with soap and water. Remove and wash contaminated clothing before reuse. If in eyes, immediately flood with water several minutes. Call a physician. If swallowed, do not induce vomiting. Call a physician.

**Environmental Hazards:** This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of waste.

**Physical or Chemical Hazards:** Combustible product. Do not use or store near heat or open flame.

**Storage and Disposal:** Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection. Keep away from food and feed.



## Colony PAINTS

Division of The Polysar Corporation

KANSAS CITY 84127 • BALTIMORE 21238 • HOUSTON 77008 • LOS ANGELES 90031