

The Valspar Corporation
1101 Third Street South
Minneapolis, MN 55415

Attention: Mr. R.E. Chamberlin

Gentlemen:

Subject: Vinyl Anti-Fouling Paint Brown 59-D-20
EPA Registration No. 8177-41
Vinyl Anti-Fouling Paint Red 59-R-24
EPA Registration No. 8177-44
Vinyl Anti-Fouling Paint MIL-P-15931C and MIL-P-0015931D
Formula 121 Type 1 Class 1 Grade B Red 569-R-1
EPA Registration No. 8177-46
Your Applications Dated September 2, 1988
EPA Received Date October 3, 1988

Removal of Propylene Oxide, a toxic inert ingredient, from these formulations and declaring on the labels that "This product contains the toxic inert ingredient Tricresyl Phosphate" is in compliance with PR Notice 87-6 and is acceptable. Also, the revised Confidential Statements of Formula agree with their labels and are acceptable.

The labels referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), are acceptable provided that you:

1. Make the labeling changes listed below before you release the product for shipment bearing the amended labeling.
 - a. On the left panel first column, delete the second Physical or Chemical Hazards statement "Do not use or store near heat or open flame" because this is in conflict with the correct Physical or Chemical Hazards statement "Flammable, keep away from heat and open flame."
 - b. Delete the words "Contains organic solvent" (and flame logo) because it will, more correctly, be replaced by the words "Contains Petroleum Distillates," which must appear on the front panel immediately below the ingredient statement.

50400:I/C:Lee:LL-20:KENCO:3/30/89:4/11/89:rw:JH:aw

- c. Delete the word "Flammable" from the sentence "Flammable, causes eye irritation"
 - d. Move the sentences "Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations" so that they immediately follow the sentence "Do not contaminate water, food, or feed by storage and disposal."
 - e. On the front panel, replace the word "Industrial" with the word "Commercial."
 - f. Refer to the enclosure, "THE LABEL" and make sure that you have complied with the type size requirements and following items: 1, 2, 3, 4, 5, 6a, 6b, 7, 7a, 7b, 7d, 7e, 8, 8a, 8b, 9c, and 10d. Also, refer to the A-79 enclosure in meeting the final printed label submission requirements. In most cases the final label is the label that will be affixed to the container.
2. Submit five (5) copies of your final printed labeling before you release the product for shipment.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product bearing the amended labeling constitutes acceptance of these conditions.

A stamped copy of the labeling is enclosed for your records.

Since you must make the above changes in your label, you may choose to update your labeling to reflect the current concept of "format labeling" (refer to the "The Label" enclosure and our comments below).

- Your "Precautionary Statements," "Hazards to Humans and Domestic Animals," headings and the "Precautionary/Safety, and Practical Treatment" statements should precede the "Environmental Hazards" and "Physical or Chemical Hazards" headings and statements.

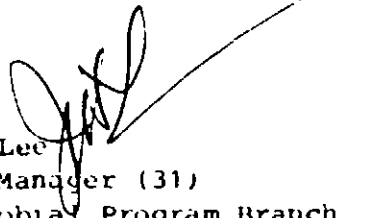
NOTE that all these precede the Directions for Use (see the "Preferred" items 8, 8a, 8b, and 8c of "The Label").

For your information, we include:

1. "The Label" enclosure, which deals with the current concept of "format labeling."
2. A DRAFT left panel which reflects many of our label review comments made in (1) above.

If you have any questions concerning this letter, please call
Mr. Edmond Prominski at (703) 557-7404.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'JHL', with a long, sweeping horizontal line extending to the right across the top of the typed name and title.

John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7504C)

Enclosures

ACCEPTED
with COMMENTS
in EPA Letter Dated:

APR 20 1989

Under the Federal Insecticide,
Fungicide and Rodenticide Act as
amended for the pesticide
registered under EPA Reg. No.

8177-46

Valspar

Vinyl Anti-Fouling Paint MIL-P-15931C & MIL-P-0015931D (Formula 121) Type I Class 1 Grade B Red 569-R-1

For Industrial Use Only. Do Not Use In or
Around a Household or Dwelling. (FA 11)
Not Sold For Use In Air Pollution Regulation Areas.
Photochemically Reactive Per Rule 102. (FA 21)

KEEP OUT OF REACH OF CHILDREN
WARNING! See Precautions Elsewhere on Label (FA-22)

EPA Reg. No. 8177-4 6 EPA Est. 8177-1X-1

NET 5 GAL (18.927 Liters)

BEST AVAILABLE COPY

PAINT
UN 1263

ANTI-FOULING INGREDIENTS	
ACTIVE INGREDIENTS	
Cuprous Oxide	66.782
INERT INGREDIENTS	
	33.222
Total 100.00%	

559 2 7-21-81

THIS PRODUCT CONTAINS
THE TOXIC INERT-INGREDIENT
TRICRESYL PHOSPHATE

The VOC of this paint exceeds
420 grams/liter (3.5 lbs./gal.)
SA-6 (M-87)

The Valspar Corporation
MAINTENANCE & MARINE COATINGS DEPARTMENT
MINNEAPOLIS, MN 55415

BEST AVAILABLE

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its label. **ANTI-FOULING PAINT FOR METAL BOTTOMS:** To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats.

Mixing: Before use power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roll or spray. Contents may be applied by hot spray (temperatures not to exceed 95°F), airless spray or regular cold spray. Apply a full wet coat in a double crosshatch pattern. Do not paint in cold or damp

weather.

Thinning: Normally no thinning required. Where necessary, for Class 1 material use Thinner 7-T (isobutyl ketone) where required by specification, or Thinner 7-T-37 for commercial work. For Class 2 material use Thinner 7-T-50 (n-butyl acetate) where required by specification, or Thinner 7-T-45 for commercial work. **Coverage:** A 2 mil dry film will be obtained at a coverage of 505 square feet per gallon for T material, and 480 square feet per gallon for Tys material. Actual coverage will be less due to techniques, job conditions and condition of surface. **Dry Time:** At 70°F and 50% R.H., allow at least 12 hours between coats, and a minimum of 6 hours before re-coating.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate land or food by storage or disposal. Pesticide wastes are toxic. Improper disposal of pesticide, spray mixture, or residue is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions contact your State Pesticide or Environment Control Agency, or the Environmental Waste Response Unit at the nearest EPA Regional Office for assistance.

CONTAINER DISPOSAL: Triple rinse (or equivalent) and offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved and local procedures.

5-85HMSMTS12

10820-2501-011

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (& DOMESTIC ANIMALS)

PHYSICAL OR CHEMICAL HAZARDS:

Do not use or store near heat or open flame.

CONTAINS ORGANIC SOLVENT

WARNING!

FLAMMABLE. CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH SKIN.

Avoid contact with eyes, skin and clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. When used in enclosed areas, spraying paint or sanding boat surface, wear appropriate, properly fitted respirator (NIOSH/MSHA approved) during and after application unless air monitoring demonstrates vapor/mist levels are below applicable levels. Follow respirator manufacturer's directions for use. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose



of in accordance with applicable regulations. **PRACTICAL TREATMENT:** If swallowed: Drink promptly of milk, egg whites, gelatin solution or, if these are not available, large quantities of water. Avoid alcohol. Get medical attention. Flush with plenty of water. Get medical attention. If on skin: Flush with plenty of soap and water. Get medical attention. If inhaled: Get to fresh air. If not breathing give artificial respiration, stop when necessary. Get medical attention.

DOT SHIPPING NAME: PAINT
DOT HAZARD CLASS: FLAMMABLE LIQUID
DOT HAZARD IDENTIFICATION NUMBER: UN 1263
Refer to Product Material Safety Data Bulletin, available for further safety and handling information.