

PM 31 | 8/11/11-11/11

Valspar

MARINE COATINGS

Vinyl Anti-Fouling Paint MIL-P-15931C & MIL-P-0015931D (Formula 121) Type I Class 1: Grade B Red 569-R-1

ACTIVE INGREDIENTS: Cuprous Oxide.....	66.78%
INERT INGREDIENTS:.....	33.22%
	100.00%

CONTAINS PETROLEUM DISTILLATES

For Commercial Use Only. Do Not Use In or Around a Household or Dwelling.

Not Sold For Use in Air Pollution Regulation Areas. Photochemically Reactive Per Rule 102.

KEEP OUT OF REACH OF CHILDREN

WARNING! See Precautions Elsewhere on Label (FR-22)

NET 5 GAL. (18.927 Liters)

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (SR-1)

WARNING!

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH SKIN.

Avoid contact with eyes, skin and clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. When used in enclosed areas, spraying paint or sanding boat surfaces, wear appropriate, properly fitted respirator (NIOSH/MSHA approved) during and after application unless air monitoring demonstrates vapor/mist levels are below applicable levels.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

ANTI-FOULING PAINT FOR METAL BOTTOMS: To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats.

Follow respirator manufacturer's directions for use. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

PRACTICAL TREATMENT: If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention. If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash with plenty of soap and water. Get medical attention. If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

Mixing: Before use power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roll or spray. Contents may be applied by hot spray (temperatures not to exceed 95°F), airless spray or regular cold spray. Apply a full wet coat in a double crosshatch pattern. Do not paint in cold or damp weather.

Thinning: Normally no thinning required. Where thinning is necessary, use thinner 7-T-33, Xylene.

Dry Time: At 70°F and 50% R.H. allow at least 4 hours dry time between coats, and a minimum of 8 hours before refloating.

D.O.T. SHIPPING NAME: PAINT
D.O.T. HAZARD CLASS: FLAMMABLE LIQUID
D.O.T. HAZARD IDENTIFICATION NUMBER: UN 1263

Refer to Product Material Safety Data Bulletin, available upon request, for further safety and handling information.

5-05 HMS MTS/2

10020-2501-01

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse, (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

The VOC of this paint exceeds
420 grams/liter (3.5 lbs./gal.)
SR-6 (6-87)


06-569R1

E.P.A. Reg. No. 8177-46
E.P.A. Est. No. 8177-MD-1



The Valspar Corporation
MAINTENANCE & MARINE COATINGS DEPARTMENT
MINNEAPOLIS, MN 55415

MEDICAL
EMERGENCY NO.
1-800-228-5635

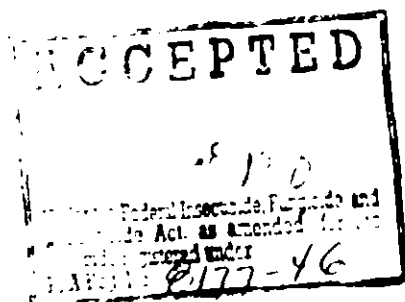

PM 31 8:177-46 P. 192
5-85 HMS/MTS#2
18820-2501-01

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (SR-1)

WARNING!

**CAUSES EYE IRRITATION. HARMFUL
IF ABSORBED THROUGH SKIN.**

Avoid contact with eyes, skin and clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. When used in enclosed areas, spraying paint or sanding boat surface, wear appropriate, properly fitted respirator (NIOSH/MSHA approved) during and after application unless air monitoring demonstrates vapor/mist levels are below applicable levels.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

ANTI-FOULING PAINT FOR METAL BOTTOMS: To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats.

Follow respirator manufacturer's directions for use. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

PRACTICAL TREATMENT: If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention. If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash with plenty of soap and water. Get medical attention. If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

Mixing: Before use power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roll or spray. Contents may be applied by hot spray (temperatures not to exceed 95°F), airless spray or regular cold spray. Apply a full wet coat in a double crosshatch pattern. Do not paint in cold or damp weather.

Thinning: Normally no thinning required. Where thinning is necessary, use thinner 7-T-33, Xylene.

Dry Time: At 70°F and 50% R.H. allow at least 4 hours dry time between coats, and a minimum of 8 hours before refloating.

D.O.T. SHIPPING NAME: PAINT

D.O.T. HAZARD CLASS: FLAMMABLE LIQUID

D.O.T. HAZARD IDENTIFICATION NUMBER:
UN 1263

Refer to Product Material Safety Data Bulletin, available upon request, for further safety and handling information.

MA
Viny
MIL-P-

ACTIVE I
INERT IN

WARNIN

BEST AVA

Valspar

INE COATINGS

Anti-Fouling Paint

931C & MIL-P-0015931D

(Formula 121)

Type I Class 1 Grade B

Red 569-R-1

MENTS: Cuprous Oxide.....	66.78%
ENTS:.....	33.22%
	100.00%

INS PETROLEUM DISTILLATES

Commercial Use Only. Do Not Use In or
a Household or Dwelling (FA-11)

and For Use in Air Pollution Regulation Areas.
chemically Reactive Per Rule 102 (FR-21)

KEEP OUT OF REACH OF CHILDREN

See Precautions Elsewhere on Label (FR-22)

5 GAL. (18.927 Liters)

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse, (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

The VOC of this paint exceeds 420 grams/liter (3.5 lbs./gal.) SR-6 (6-87)

06-569R1

E.P.A. Reg. No. 8177-46
E.P.A. Est. No. 8177-MD-1

The Valspar
MAINTENANCE & MAINTENANCE
MINNEAPOLIS

BEST AVAILABLE COPY



Reg # 8177-46

PM-31

192

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (SR-1)**

WARNING!

**CAUSES EYE IRRITATION. HARMFUL
IF ABSORBED THROUGH SKIN.**

Avoid contact with eyes, skin and clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. When used in enclosed areas, spraying paint or sanding boat surface, wear appropriate, properly fitted respirator (NIOSH/MSHA approved) during and after application unless air monitoring demonstrates vapor/mist levels are below applicable levels.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

ANTI-FOULING PAINT FOR METAL BOTTOMS: To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats.

Follow respirator manufacturer's directions for use. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

PRACTICAL TREATMENT: If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention. If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash with plenty of soap and water. Get medical attention. If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

Mixing: Before use power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roll or spray. Contents may be applied by hot spray (temperatures not to exceed 95°F), airless spray or regular cold spray. Apply a full wet coat in a double crosshatch pattern. Do not paint in cold or damp weather.

Thinning: Normally no thinning required. Where thinning is necessary, use thinner 7-T-33, Xylene.

Dry Time: At 70°F and 50% R.H. allow at least 4 hours dry time between coats, and a minimum of 8 hours before refloating.

D.O.T. SHIPPING NAME: PAINT

D.O.T. HAZARD CLASS: FLAMMABLE LIQUID

D.O.T. HAZARD IDENTIFICATION NUMBER:
UN 1263

Refer to Product Material Safety Data Bulletin, available upon request, for further safety and handling information.

5-85HMSMTS#2

18820-2501-01

MA
Viny
MIL-P-

ACTIVE IN
INERT IN

WARNING

BE

Valspar

MARINE COATINGS

Vinyl Anti-Fouling Paint
MIL-P-15931C & MIL-P-0015931D
 (Formula 121)
 Type I Class 1 Grade B
Red 569-R-1

ACTIVE INGREDIENTS: Cuprous Oxide.....66.78%
 INERT INGREDIENTS:.....33.22%
 100.00%

CONTAINS PETROLEUM DISTILLATES

For Commercial Use Only. Do Not Use In or
 Around a Household or Dwelling (FA-11)

Not Sold For Use in Air Pollution Regulation Areas.
 Photochemically Reactive Per Rule 102 (FR-21)

KEEP OUT OF REACH OF CHILDREN

WARNING! See Precautions Elsewhere on Label (FR-22)

NET 5 GAL. (18.927 Liters)

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse, (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

The VOC of this paint exceeds
 420 grams/liter (3.5 lbs./gal.)
 SR-6 (6-87)

06-569R1

E.P.A. Reg. No. 8177-4C
 E.P.A. Est. No. 8177-MD-1

The Valspar
 MAINTENANCE & MINNE

BEST AVAILABLE COPY