

SEP 10 1990

The Valspar Corporation
P.O. Box 625
Raritan, NJ 08869-0625

Attention: R.E. Chamberlin

Gentlemen:

Subject: Sta Clean Chlorinated Rubber Antifouling Paint 58SAP5000
EPA Registration No. 8177-66
Your Submission Dated October 11, 1989
EPA Received Date October 27, 1989

The amendment referred to above, submitted in connection with registration under section 3(c)(7)(A) of the Federal Insecticide, Fungicide, and Rodenticide Act (FIRA), is acceptable provided that you:

1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
2. Before you release the product for shipment bearing the amended labeling, submit an amended Confidential Statement of Formula for your product which demonstrates that your product is within certified limits for TBT release rate which places it within the release rate limit imposed by the Organotin Antifouling Paint Control Act (OAPCA) of 1988. Your product was certified as being within the OAPCA limit by the Agency in its letter dated April 24, 1990.
3. Submit acceptable prototype specifications and materials for a certification and training program for the use/disposal/and removal of TBT antifouling paints and paint wastes within 180 days from the date of your application to amend this registration. Your application was dated October 11, 1989. The prototype specifications and materials must be submitted by October 24, 1990. The minimum elements to be addressed in the certification

58529:1:BUCHYL32-T6:KENC09/04/90:09/30/90:CL:VO:ER:CL

CONCURRENCES

SYMBOL	H 795-C					
SURNAME	V. P. ...					
DATE	9-10-90					

2073

-2-

and training program are identified in the Agency's Notice at 53 FR 39038.

4. Make the labeling changes listed below before you release the product for shipment bearing the amended labeling:
 - a. Under the "Statement of Practical Treatment - If Swallowed" heading, rephrase the sentence only to read as follows:

If Swallowed: Drink promptly a large quantity of water. Avoid alcohol. Get medical attention.
 - b. Please make all the necessary changes to your label according to the Label Improvement Program Notice dated May 2, 1990 enclosed.
5. Submit five (5) copies of your final printed labeling before you release the product for shipment bearing the amended labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product bearing the amended labeling constitutes acceptance of these conditions. Any existing stock within your possession or control must be restickered to bear labeling approved as part of your conditional registration; all new production must also bear such a label.

A stamped copy of the label is enclosed for your records. In order to be acceptable, your label must bear the changes listed in item 4 above.

Should you have any further questions, please contact Veronica Dutch at (703) 557-7404.

Sincerely yours,

John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

Enclosures

PM 51 X 1171-66

573
CENTER PANEL



JOTUN VALSPAR



MARINE COATINGS

STA CLEAN CHLORINATED RUBBER ANTIFOULING 58SAF5000 RED

ACTIVE INGREDIENT: Tributyl Tin Fluoride	3.2%
ACTIVE INGREDIENT: Cuprous Oxide	37.9%
INERT INGREDIENTS:	58.9%
	100.0%

CONTAINS PETROLEUM DISTILLATES

For Industrial Use Only. Do Not Use In or Around a Household or Dwelling. (FR 11)

Not Sold For Use in Air Pollution Regulation Areas. Photochemically Reactive Per Rule 102. (FR 21)

KEEP OUT OF REACH OF CHILDREN

DANGER See Precautions Elsewhere on Label (FR-22)

NET 5 GAL. (18.927 Liters)

ACCEPTED
with COMMENTS

SEP 10 1988

8177-66

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS & DOMESTIC ANIMALS

Corrosive. Causes skin burns. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. Causes eye irritation. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. This product may be a dermal sensitizer. Avoid contact with skin, eyes, or clothing. Avoid breathing vapor, spray mist, dust or chips from sanding. Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation.

While spraying paint or sanding boat surface, wear a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

PRACTICAL TREATMENT: If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash with plenty of soap and water. Get medical attention. If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Sta-Clean C.R. Red 58SAF5000 is an extra strong Antifouling paint designed for long term exposure in tropical water.

It may be applied by brush, roller or spray to steel vessels operating in fresh and/or salt water and subject to attack by barnacles, algae, tube worms, and other fouling organisms.

SURFACE PREPARATION: Clean surface thoroughly of grease, oil, loose paint, dirt, millow, rust scale or any other foreign material.

PRIMING: A Jotun/Valpar primer must be applied to bare, newly sandblasted, or porous surfaces before painting.

Always apply paint to a dry surface.


Stir paint thoroughly from the bottom.

For Further Use Directions See The Technical Data Bulletin

IMPORTANT: If it is necessary to paint under unusual conditions, call your JOTUN/VALSPAR representative for technical service.

- D.O.T. SHIPPING NAME: PAINT
- D.O.T. HAZARD CLASS: FLAMMABLE LIQUID
- D.O.T. HAZARD IDENTIFICATION NUMBER: UN 1263

Refer to Product Material Safety Data Bulletin available upon request, for further safety and handling information.

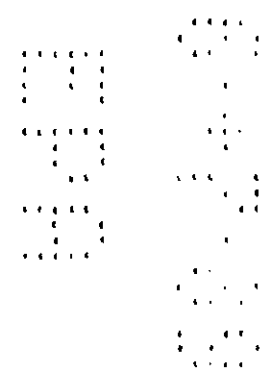

STORAGE AND DISPOSAL

Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the nearest EPA Regional Office for guidance. Do not contaminate water, food or feed by storage or disposal.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

The VOC of this paint exceeds
420 grams/liter (3.5 lbs./gal.)
SR-6 (6-87)

06-58A5000

E.P.A. REG. NO. 8177-66
E.P.A. EST. NO. 8177-MD-1

The Valspar Corporation
MAINTENANCE & MARINE COATINGS DEPARTMENT
MINNEAPOLIS, MN 55415

**MEDICAL
EMERGENCY NO.**
1-800-228-5635

It is unlawful to use this product on non-aluminum hulled vessels less than 82 feet (25 meters) in length (on deck) except for the outboard motor or lower drive unit of such vessel.

Restricted Use Pesticide due to toxicity to Aquatic Organisms including shellfish. For sale only to certified commercial applicators and for use only by persons under the direct supervision of an on-site (at the work site) certified commercial applicator. These restrictions became effective on March 1, 1998.

Users must comply with all applicable OSHA requirements.

During and after paint removal and/or application of new TBT paint, methods must be employed which are designed to prevent release of TBT paints into the aquatic environment. Following removal of old TBT paint and/or application of new TBT paint, all paint chips and spent abrasives, paint containers, unused paint, and any other waste products from paint removal or application must be disposed of in a sanitary landfill.

E/6/89