

Please read instructions on reverse before completing form.

Form Approved. OMB No. 2070-0060. Approval expires 2-28-95



United States Environmental Protection Agency Washington, DC 20460

Registration Amendment Other (X)

OPP Identifier Number 221962

Application for Pesticide - Section I

1. Company/Product Number 8177-78
2. EPA Product Manager Marshall Swindell
3. Proposed Classification Restricted (X)
4. Company/Product (Name) Hydro-Clean O.M.P. Antifouling Paint 64SAF4267 Red
5. Name and Address of Applicant (Include ZIP Code) The Valspar Corporation 1101 Third Street South Minneapolis, MN 55415
6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. Product Name

Section - II

Amendment - Explain below. Resubmission in response to Agency letter dated. Notification - Explain below. Final printed labels in response to Agency letter dated. "Me Too" Application. Other - Explain below. NOTIFICATION OCT 21 1996


Explanation: Use additional page(s) if necessary. (For section I and Section II.) Additional brand name: Alusea Anti-Fouling Paint 64SAF1000 Red This notification is consistent with the provisions of PR Notice 95-2 and EPA regulations at 40 CFR 152.46, and no other changes have been made to the labeling or the confidential statement of formula of this product. I understand that it is a violation of 18 USC Sec. 1001 to willfully make any false statement to EPA. I further understand that if this notification is not consistent with the terms of Pr NSection 95-III and 40 CFR 152.46, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

1. Material This Product Will Be Packaged In: Child-Resistant Packaging, Unit Packaging, Water Soluble Packaging, 2. Type of Container: Metal (XX), Plastic, Glass, Paper, Other (Specify)
3. Location of Net Contents Information: Label (X), Container
4. Size(s) Retail Container: 5 Gallon Pail
5. Location of Label Directions: On Label (X)
6. Manner in Which Label is Affixed to Product: Lithograph Paper glued (X), Stenciled, Other

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.) Name: B. C. Heath, Title: Technical Manager Regulatory Affairs, Telephone No.: 612-375-7963
Certification: I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.
2. Signature: B. C. Heath, 3. Title: Technical Manager Regulatory Affairs, 4. Typed Name: B. C. Heath, 5. Date: October 1, 1996, 6. Date Application Received (Stamped)

WARNING

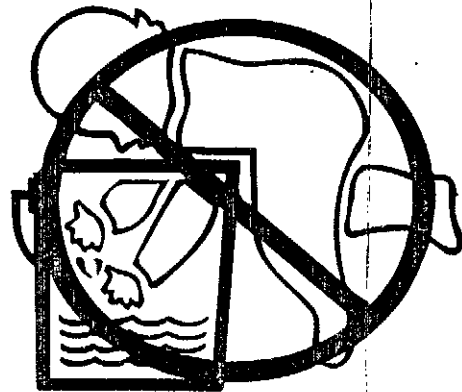

Children can fall into bucket and drown.

Keep children away from buckets with even a small amount of water.

HEALTH 3
FLAMMABILITY 3
REACTIVITY 1
PROTECTIVE EQUIPMENT X



JOTUN VALSPAR MARINE COATINGS

RESTRICTED USE PESTICIDE

Due to Toxicity to Aquatic Organisms, Including shellfish. For sale only to certified commercial applicators and for use only by certified commercial applicators or by persons under the direct supervision of an on-site (at the work site) certified commercial applicator.

ALUSEA ANTI-FOULING PAINT 64SAF1000 RED

ACTIVE INGREDIENTS: Tributyltin Methacrylate (as part of polymer).....13.10%
INERT INGREDIENTS:86.90%

Total..... 100.00%

Total Tin Content:4.16%

**CONTAINS PETROLEUM DISTILLATES
KEEP OUT OF REACH OF CHILDREN**

DANGER! See Precautions Elsewhere on Label (FR-2)

2
4
3


BEST AVAILABLE COPY

FLAMMABLE LIQUID

3

NET 5 GAL. (18.927 Liters)

AVISO

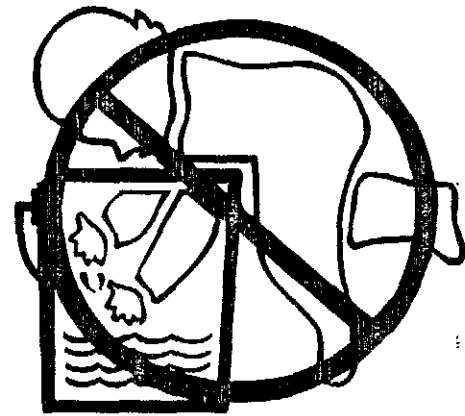

Niños pueden caer adentro de el balde y ahogarse

Retire los niños de los baldes aunque solamente tengan un poco agua

PAR S



BEST AVAILABLE COPY

CIDE

For sale only by certified revision of an

PAINT

.....13.10%
.....86.90%
.....100.00%
.....4.16%

TES EN

Label (FR-22)

ers)

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling. It is unlawful to use this product on non-aluminum hulled vessels less than 82 feet (25 meters) in length (on deck), except for the outboard motor or lower drive unit of such vessel.

Users must comply with all applicable OSHA requirements.

Alsea is an anti-fouling paint of the self polishing variety. It may be applied by brush, roller or spray to steel vessels operating in fresh and/or salt water and subject to attack by barnacles, algae, tube worms and other fouling organisms.

SURFACE PREPARATION: Clean surface thoroughly of grease, oil, loose paint, dirt, mildew, rust scale or any other foreign material.

PRIMING: A Jotun/Valspar primer must be applied to bare newly sandblasted, or porous surfaces before painting.

Always apply paint to a dry surface.

Stir Paint thoroughly from the bottom.

For Further Use and Directions, See the Technical Data Bulletin.

IMPORTANT: If it is necessary to paint under unusual conditions, call your Jotun/Valspar representative for technical service.

D.O.T. SHIPPING NAME: PAINT
D.O.T. HAZARD CLASS: FLAMMABLE LIQUID
D.O.T. HAZARD IDENTIFICATION NUMBER: UN 1263

STORAGE AND DISPOSAL

Storage: Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal: 1) Paint chips, spent abrasives, and any other waste materials from removal of old paint must be disposed of in a sanitary landfill (or if required by Federal, State or local regulations, handled as a hazardous waste). 2) If possible, use all of the contents by application according to label instructions. Manage excess paint, rinsate, and other application wastes in accordance with Federal, State, and local requirements. Consult your state pesticide or Environmental control agency, nearest EPA Regional Office, or the RCRA/Superfund Hotline (800) 424-9346 for waste disposal guidance.

Container Disposal: Triple rinse container if intended for recycling or reconditioning. Empty paint containers with small amounts of dried residue must be disposed of in a sanitary landfill (or if required by Federal, State or local regulations, handled as a hazardous waste).

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (SR-1)

DANGER

Corrosive. Causes skin burns. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. Causes eye irritation. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. This product may be a dermal sensitizer. Avoid contact with skin, eyes, or clothing. Avoid breathing (vapor, spray mist, dust or chips from sanding). Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation.

While spraying paint or sanding boat surface, wear a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

PHYSICAL AND CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

PRACTICAL TREATMENT: If swallowed: Drink promptly a large quantity of water. Avoid alcohol. Get medical attention. If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash with plenty of soap and water. Get medical attention. If irritation persists. If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to aquatic organisms including fish and shellfish. Do not apply directly to water. Do not allow chips and dust generated during paint removal to enter water.

For Industrial Use Only. Do Not Use In or Around a Household or Dwelling. Not For Residential Use.
The VOC of this paint exceeds 420 grams/liter (3.5 lbs./gal.)
SR-6 (6-87)
06 - 64SAF1000
Not Sold For Use In Air Pollution Regulation Areas. Photochemically Reactive Per Rule 102.

E.P.A. Reg. No. 8177-78
E.P.A. Est. No. 8177-TX-2

Medical Emergency No.
1-800-228-5635
SR-9 (4-88)

The Valspar Corporation
MAINTENANCE & MARINE COATINGS DEPARTMENT
MINNEAPOLIS, MN 55415