

US ENVIRONMENTAL PROTECTION AGENCY
OFFICE OF PESTICIDES PROGRAMS
REGISTRATION DIVISION (TS-767)
WASHINGTON, DC 20460

EPA REGISTRATION NO.

6177-80

DATE OF ISSUANCE

OCT 23 1991

TERM OF ISSUANCE

NOTICE OF PESTICIDE:

REGISTRATION
 REREGISTRATION

(Under the Federal Insecticide, Fungicide,
and Rodenticide Act, as amended)

NAME OF PESTICIDE PRODUCT

Hydro-Clean C.I.P. Antifouling Paint
650AF4267 Pex

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

The Valspar Corporation
1101 Third Street South
Minneapolis, MN 55415

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you:

1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.

At present, the data requirements specified in the following documents are among the data requirements applicable to your registration and for which you are required to select satisfactory methods of compliance and to inform the Agency of such selection and to comply with all deadlines on a schedule consistent with that required of other registrants of similar products as required by FIFRA Section 3(C)(7)(A).

This registration is subject to the Data Call-In requirements including, but not limited to, those specified in the January 31, 1985 Data Call-In Notice on Tributyltin, the July 29, 1986 Data Call-In Notice on Tributyltin, the March 22, 1989 Data Call-In Notice for TBT Monitoring and Product Efficacy Data, and the Reregistration Data Requirements Package for products containing TBT issued in 1990.

BEST AVAILABLE COPY

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL

DATE

2. Make the labeling change listed below before your release the product for shipment.

- Add the phrase "EPA Registration No. 8177-80"

3. Before you release the product for shipment bearing the EPA registered labeling, you must submit an amended Confidential Statement of Formula for your product which demonstrates that you product is within the certified limits for TBT release rate which places it within the release rate limit imposed by the Organotin Antifouling Paint Control Act of 1988. Your product was certified as being within the OAPCA limit by the Agency in its letter dated May 28, 1991.

"The release rate data submitted is accepted for certification purposes. Hydro-Clean O.M.P. Antifouling Paint 65SAF4267 Red has a certified average release rate of 3.64 ug/cm²/day."

4. Submit five (5) copies of your final printed labeling before you release the product for shipment.

A stamped copy of the label is enclosed for your records.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product bearing the final labeling approved as part of your conditional registration constitutes acceptance of these conditions.

If you have any questions concerning this letter, please contact Marshall Swindell at (703) 557-6908.

Sincerely yours,



John H. Lee
Product Manager 31
Antimicrobial Programs Branch
Registration Division (H7505C)

BEST AVAILABLE COPY

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labelling. It is unlawful to use this product on nonaluminum hulled vessels less than 82 feet (25 meters) in length (on deck), except for the outboard motor or lower drive unit of such vessel.

Users must comply with all applicable OSHA requirements.

Hydro-Clean O.M.P. is an Antifouling paint of the self polishing variety.

It may be applied by brush, roller or spray to steel vessels operating in fresh and/or salt water and subject to attack by barnacles, algae, tube worms, and other fouling organisms.

SURFACE PREPARATION: Clean surface thoroughly of grease, oil, loose paint, dirt, mildew, rust scale or any other foreign material.

PRIMING: A Jotun/Valspar primer must be applied to bare newly sandblasted, or porous surfaces before painting.

Always apply paint to a dry surface.

Stir paint thoroughly from the bottom.

"For Further Use Directions See The Technical Data Bulletin".

IMPORTANT: If it is necessary to paint under unusual conditions, call your Jotun/Valspar representative for technical service.

D.O.T. SHIPPING NAME: PAINT
D.O.T. HAZARD CLASS: FLAMMABLE LIQUID
D.O.T. HAZARD IDENTIFICATION NUMBER:
UN 1263

STORAGE AND DISPOSAL

Storage: Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal: 1. Paint chips, spent abrasives, and any other waste materials from removal of old paint must be disposed of in a sanitary landfill (or if required by Federal, State or local regulations, handled as a hazardous waste).

2. If possible, use all of the contents by application according to label instructions. Manage excess paint, rinsate, and other application wastes in accordance with Federal, State, and local requirements. Consult your state pesticide or Environmental control agency, nearest EPA Regional Office, or the RCRA/Superfund Hotline (800-424-9346) for waste disposal guidance.

Container Disposal: Triple rinse container if intended for recycling or reconditioning. Empty paint containers with small amounts of dried residue must be disposed of in a sanitary landfill (or if required by Federal, State or local regulations, handled as a hazardous waste).

Vals

RESTRICTED USE

Due to Toxicity to Aquatic Organisms
For sale only to certified contractors
for use only by certified contractors
persons under the direct supervision
(at the work site) certified contractor

HYDRO-CLEAN ANTIFOULING 65SAF426

Active Ingredients: Tributyltin Methacrylate
Active Ingredients: Cuprous Oxide
Inert Ingredients:

Total Tin Content:

CONTAINS PETRO

KEEP OUT OF REACH OF CHILDREN

DANGER! See Precautions

NET 5 GAL.

BEST AVAILABLE COPY

ACCEPTED
and RECORDED
in EPA Index Book

OCT 23 1991

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
as amended for the pesticide
registered under EPA Reg. No.
8177-80

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. **8177-80**

Absorbed through skin or inhaled. This product may be a dermal sensitizer. Avoid contact with skin, eyes, or clothing. Avoid breathing (vapor, spray mist, dust or chips from sanding). Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation.

medical attention. If irritation persists. If inhaled. Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention. **CALL TO PHYSICIAN:** Probable cause: severe may contraindicate the use of gastric lavage.

While spraying paint or sanding boat surface, wear a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to aquatic organisms including fish and shellfish. Do not apply direct to water. Do not allow chips and dust generated during paint removal to enter water.

PHYSICAL AND CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

The VOC of this paint exceeds 420 grams/liter (3.5 lbs./gal.) SR-6 (6-87)


For Commercial Use Only. Do Not Use In or Around a Household or Dwelling. Not For Residential Use. FR 11-2700
Not Sold For Use in Air Pollution Regulation Areas. Photochemically Reactive Per Rule 102. FR 21-2000

06-65SAF4267

EPA Reg. No. **8177-80**
EPA Est. No. **8177-MD-1**

The Valspar Corporation
MAINTENANCE & MARINE COATINGS DEPARTMENT
MINNEAPOLIS, MN 55415

MEDICAL EMERGENCY NO:
1-800-228-5635

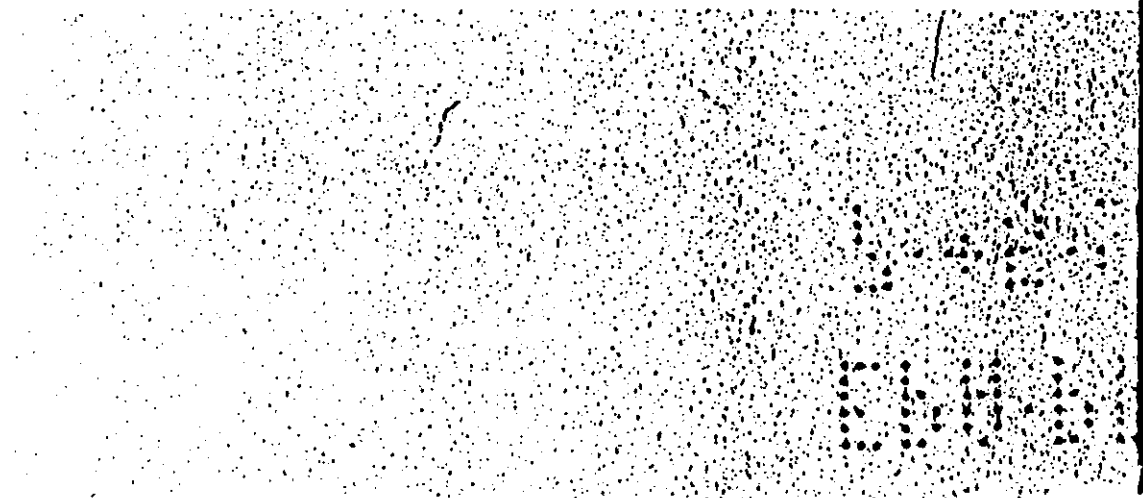

BEST AVAILABLE COPY