


PM 31 8177-85

1024

	U.S. ENVIRONMENTAL PROTECTION AGENCY Office of Pesticide Programs Registration Division (H7505C) 401 "M" St., S.W. Washington, D.C. 20460	EPA Reg. Number:  8177-85	Date of Issuance:  March 28, 1997
	NOTICE OF PESTICIDE: <u>  x  </u> Registration <u>      </u> Reregistration	Term of Issuance: Conditional	
	(under FIFRA, as amended)	Name of Pesticide Product:	
Name and Address of Registrant (include ZIP Code):  The Valspar Corporation 1101 Third Street South Minneapolis, MN 55415			
Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.			
On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.  Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.  This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:  1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for reregistration of your product under FIFRA section 4.  2. Make the following label changes:  a. Revise the EPA Registration Number to read, "EPA Reg. No. 8177-85".  b. According to the Confidential Statement of Formula, the label should declare 51.5% Cuprous oxide. Please note that the source product of cuprous oxide is 95% active, therefore $54.2 \times 0.95 = 51.5\%$ .  c. On the CSF please note that the total weight in column 17 is 1475.2 and not 1469.2 as stated.			
Signature of Approving Official:  Marshall Swindell Acting Product Manager 31 Regulatory Management Branch 1 Antimicrobial Division (7504C)		Date:  MAR 28 1997	

2944

page 2

EPA Reg. No. 8177-85

3. Submit two copies of the revised final printed label for the record.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.


Sincerely,



Marhsall Swindell  
Acting Product Manager 31  
Regulatory Management Branch 1  
Antimicrobial Division (7504C)

Enclosure

**! WARNING**

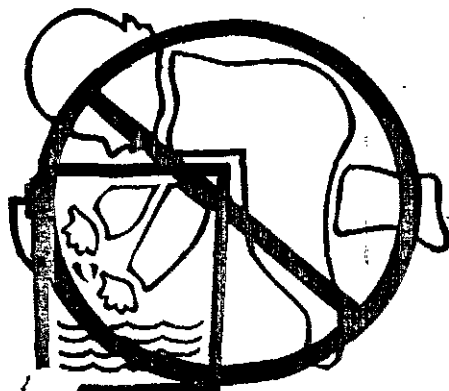

Children can fall into  
bucket and drown.

Keep children away from  
buckets with even a small  
amount of water.

HEALTH **3**  
FLAMMABILITY **3**

REACTIVITY **1**


PROTECTIVE **X**  
EQUIPMENT

ACCEPTED  
with COMMENTS  
in EPA Letter Dated:

MAR 28 1997

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act  
as amended, for the pesticide  
registered under EPA Reg. No.

8177-85



**JOTUN V**  
**MARINE CC**

**V59R**  
**SOVAKLOR**  
**SUPER SERVICE**

ACTIVE INGREDIENTS: **Ci**  
INERT INGREDIENTS: **.....**

**CONTAINS PETROLEU**

For Commercial Use Only  
Around a Household **DV**

Not Sold For Use in Air Pollu  
Photochemically Reactive Pe

**KEEP OUT OF REAC**

**WARNING! See Precaut. ns**

**NET 5 GAL. (1**

**FLAMMABLE LIQUID**

**3**



**DIRECTIONS FOR USE:** It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**ANTI-FOULING PAINT FOR METAL BOTTOMS:** To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

**Surface Preparation:** Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats.

**Mixing:** Before use power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

**Application:** Apply by brush, roll or spray. Contents may be applied by hot spray (temperatures not to exceed 95°F.), airless spray or regular cold spray. Apply a full wet coat in a double crosshatch pattern. Do not paint in cold or damp weather.

**Thinning:** Normally no thinning required. Where thinning is necessary, use thinner 7-T-33, Xylene.

**Dry Time:** At 70°F. and 50% R.H. allow at least 4 hours dry time between coats, and a minimum of 8 hours before refloating.

**D.O.T. SHIPPING NAME:** PAINT  
**D.O.T. HAZARD CLASS:** FLAMMABLE LIQUID  
**D.O.T. HAZARD IDENTIFICATION NUMBER:** UN 1263

Refer to Product Material Safety Data Bulletin, available upon request, for further safety and handling information.

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (SR-1)

#### WARNING!

Causes Eye Irritation. Harmful If Absorbed Through Skin.

Avoid contact with eyes, skin and clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. When used in enclosed areas, spraying paint or sanding boat surfaces, wear appropriate, properly fitted respirator (NIOSH/MSHA approved) during and after application unless air monitoring demonstrates vapor/mist levels are below applicable levels.

**ENVIRONMENTAL HAZARDS:** This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

**PHYSICAL OR CHEMICAL HAZARDS:**  
Flammable. Keep away from heat and open flame.

Follow respirator manufacturer's directions for use. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

**PRACTICAL TREATMENT:** If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention. If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash with plenty of soap and water. Get medical attention. If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.


## STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

**Pesticide Disposal:** Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for Guidance.

**CONTAINER DISPOSAL:** Triple rinse, (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

# AVISO

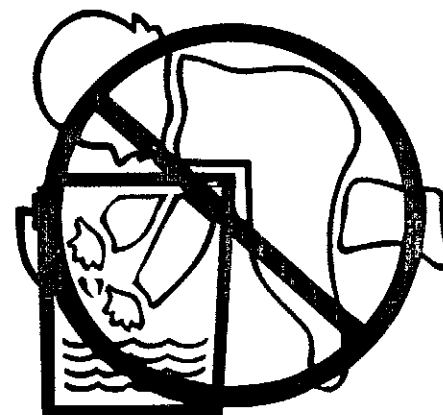

Niños pueden caer adentro de el balde y ahogarse

Retire los niños de los baldes aunque solamente tengan un poco agua

The VOC of this paint is  
389.5 grams/liter (3.25 lbs./gal.)  
SR-6 (6-87)

## 06-V59R27

E.P.A. Reg. No. 8177  
E.P.A. Est. No. 8177-TX-2

**The Valspar Corporation**  
MAINTENANCE & MARINE COATINGS DEPARTMENT  
MINNEAPOLIS, MN 55415

MEDICAL EMERGENCY NO.  
1-800-228-5635

REC'D EPA/OPP/DPDI

96 OCT 16 AM 10:48

4044