

PM 33

8177

10-9-98

104



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Registration Division (7505C)
401 "M" Street, N.W.
Washington, D.C. 20460

Number:

8177-87

Date of Issuance:

OCT 09 1998

NOTICE OF PESTICIDE:

- X Registration
Reregistration

Term of Issuance:

Conditional

Name of Pesticide Product:

Jotun Valspar Marine
Coatings 60A3000
Seavictor 40 Anti-
Fouling Red

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):

The Valspar Corporation
1101 Third Street South
Minneapolis, Minnesota 55415

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, at his option, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:

- 1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for reregistration of your product under FIFRA section 4.
2. Make the following label changes:
a. Revise the EPA Registration Number to read, "EPA Registration No. "8177-87".

Marshall Swindell
Marshall Swindell, PM-33
Regulatory Management Branch-1
Antimicrobials Division (7510W)

Date:

OCT 09 1998

CONCURRENCES

Table with columns for SYMBOL and SURNAME, used for recording concurrences.

20/4

3. Submit two copies of the revised final printed label for the record.

The Confidential Statement of Formula dated August 14, 1998, is acceptable.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

If you have any questions concerning this letter, please contact Pam Hasty at (703)308-7933.


Sincerely,



Marshall Swindell
Product Manager 33
Regulatory Management Branch 1
Antimicrobials Division (7510W)

Enclosure

WARNING

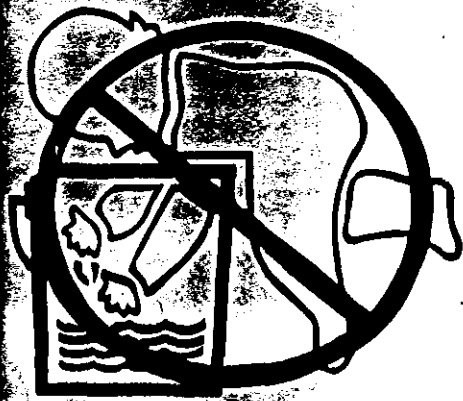

Children can fall into bucket and drown.

Keep children away from buckets with even a small amount of water.

HEALTH 2

FLAMMABILITY 3

REACTIVITY 1

PROTECTIVE EQUIPMENT X



JOTUN VALSPA MARINE COATINGS

ACCEPTED
with COMMENTS
in EPA Letter Dated:

OCT 09 1998

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.

8177-87

60A3000 RED

SEAVICTOR 40

ANTI-FOULING RED

ACTIVE INGREDIENT: Cuprous Oxide.....	31.9%
INERT INGREDIENTS:.....	68.1%
	100.00%

CONTAINS PETROLEUM DISTILLATES

For Commercial Use Only. Do Not Use
In or Around a Household or Dwelling (FA-11)

Not Sold for Use in Air Pollution Regulation Areas.
Photochemically Reactive Per Rule 102. (FR-21)

KEEP OUT OF REACH OF CHILDREN

WARNING! See Precautions Elsewhere on Label (FR-22)

FLAMMABLE LIQUID

3

NET CONTENTS 5 Gal. (18.927 Liters)

17/1

R

V

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (SR-1)

WARNING!

**CAUSES EYE IRRITATION. HARMFUL
 IF ABSORBED THROUGH SKIN.**

Avoid contact with eyes, skin and clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. When used in enclosed areas, spraying paint or sanding boat surfaces, wear appropriate, properly fitted respirator (NIOSH/MSHA approved) during and after application unless air monitoring demonstrates vapor/mist levels are below applicable levels.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

ANTI-FOULING PAINT FOR METAL BOTTOMS: To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats.

Follow respirator manufacturer's directions for use. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

PRACTICAL TREATMENT: If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention. If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash with plenty of soap and water. Get medical attention. If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

Mixing: Before use power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roll or spray. Contents may be applied by hot spray (temperatures not to exceed 95°F), airless spray or regular cold spray. Apply a full wet coat in a double crosshatch pattern. Do not paint in cold or damp weather.

Thinning: Normally no thinning required. Where thinning is necessary, use thinner 7-T-33, Xylene.

Dry Time: At 70°F and 50% R.H. allow at least 4 hours dry time between coats, and a minimum of 8 hours before refloating.

D.O.T. SHIPPING NAME: PAINT
D.O.T. HAZARD CLASS: FLAMMABLE LIQUID
D.O.T. HAZARD IDENTIFICATION NUMBER:
 UN 1263

Refer to Product Material Safety Data Bulletin, available upon request, for further safety and handling information.

THE VOC OF THIS PAINT IS
 392 GMS./LTR. (3.27 LBS./GAL.),


06-60A3000

E.P.A. Reg. No. 8177-ET
 E.P.A. Est. No. 8177-TX-2

The Valspar Corporation
 MAINTENANCE & MARINE COATINGS DEPARTMENT
 MINNEAPOLIS, MN 55415

**MEDICAL
 EMERGENCY NO.**
 1-800-228-5635

AVISU

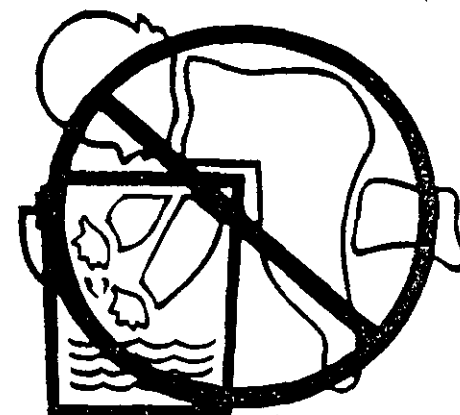

Niños pueden caer adentro
 de el balde y ahogarse

Retire los niños de los
 baldes aunque solamente
 tengan un poco agua

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse, (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

1/8/84