



POLYCLAD - ANTI-FOULING 1240-19  
For Commercial Use Only

PRECAUTIONARY STATEMENTS \*1

HAZARDS TO HUMANS

WARNING \*2

Causes eye irritation. Harmful \*3 if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe spray mist. Wear a mask or respirator jointly approved by the Mining Enforcement & Safety Administration & the National Institute for Occupational Safety & Health. Remove contaminated clothing & wash before reuse. Wash thoroughly with soap and water after handling.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS

(Flammable)

Keep away from heat & open flame.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

STORAGE & DISPOSAL\*4

Storage: Temperature 40°-110°F (4-43°C)

Humidity: 0-100%

Disposal: Triple rinse (or equivalent).

Then offer for recycling or reconditioning, or puncture & dispose of in a sanitary landfill, or by other approved state & local procedures.

Pesticide, spray mixture, or rinse water that cannot be used according to label instructions must be disposed of according to federal or approved state procedures under Subtitle C of the Resource Conservation & Recovery Act.

EPA/Anti-Fouling 1240-19  
jas/120782

Active Ingredient:	
Cuprous oxide	16.0%
Copper (metallic)	0.3%
Inert Ingredients	83.7%
Total	100.0%

Contains Petroleum Distillates


KEEP OUT OF REACH OF CHILDREN  
WARNING\*4  
STATEMENT OF PRACTICAL TREATMENT \*5  
IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get Medical Attention.  
IF IN EYES: Flush with plenty of water. Get Medical Attention.  
IF ON SKIN: Wash with plenty of soap and water. Get Medical Attention.  
IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get Medical Attention.

Mfg. By: Carboline Company  
(Address as appropriate)

EPA Est. No. (As appropriate)

EPA Reg. No. 8186-5

Net Contents: 5 Gallons or 18.9 liters

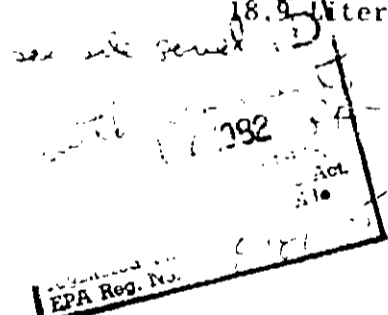

FOR GENERAL USE

Polyclad 1240-19 is a fast drying anti-fouling which offers long term protection from marine organisms & slime in salt water when applied over properly primed wood or steel bottoms. Metal surfaces should be primed with non-conductive anti-corrosive coatings before application; wood should be clean, dry and free of loose paint. Spray application is recommended, however, application by roller is acceptable. When spraying, applicators must be adequately covered to preclude the possibility of eye or skin contact or inhalation of the spray mist. A full face, air supplied respirator is recommended. Similar precautions should be taken during mixing & for other workers within a 25 foot radius of the application. See Product Data Sheet for further details.

WARRANTY STATEMENT:

Our recommendations for use of this product are based upon tests believed to be reliable. The use of this product being beyond the control of the manufacturer, no guarantee, expressed or implied, is made as to the effects of such or the results to be obtained if not used in accordance with directions or established safe practice. The buyer must assume all responsibility, including injury or damage, resulting from its misuse as such, or in combination with other materials.

- \*1 6 pt. type
- \*2 8 pt. type
- \*3 6 pt. type
- \*4 12 pt. type
- \*5 8 pt. type

L750RD 1/83

