

MECO MICROBIOCIDAL PQ

Concentrated disinfectant for industrial, commercial, refrigeration systems, gas plants, petrochemical plants cooling systems.

MAINTENANCE ENGINEERING CO

P. O. BOX 1729

PHONE: 222-2351

HOUSTON, TEXAS 77001

Directions for Use:

Meco Microbicide PQ is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 2.88 to 7.3 fluid ounces of Meco Microbicide PQ per 1000 gallons of water to provide a concentration of 24 to 60 parts per million of Meco Microbicide PQ based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 0.73 to 7.3 fluid ounces of Meco Microbicide PQ per 1000 gallons of water (6 to 60 parts per million of Meco Microbicide PQ) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

Fish and/or Wildlife:

This product is toxic to fish. "Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water"; Use only as directed on label.

Container Disposal:

Do not reuse container. Destroy when empty.

CAUTION

WARNING: KEEP OUT OF THE REACH OF CHILDREN

Harmful if swallowed. Avoid contact with eyes. In case of contact flush with water for at least 15 minutes. If eye irritation persists, get medical attention. Avoid breathing dust.

Active ingredient.....


Poly(oxyethylene(dimethyliminio)ethylene dichloride)

Inert ingredient.....

Weight per gallon.....

Weight of active ingredient per gallon.....

EPA Registration No. 8249-4

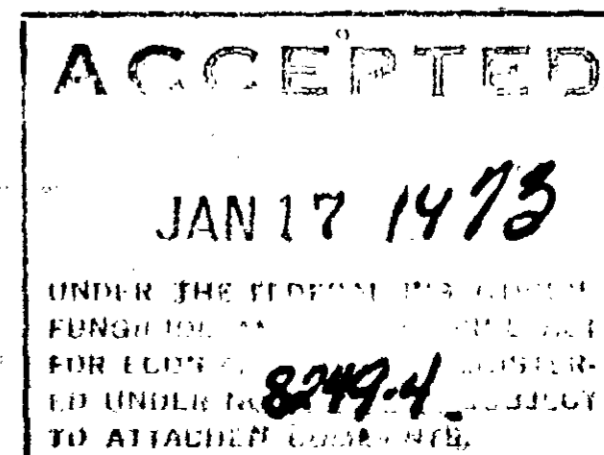

CHEMICALS WITH ENGINEERING SERVICE

MECO MICROBIOCIDAL PQ

Concentrated disinfectant for industrial, commercial, refrigeration systems, gas plants, petrochemical plants cooling systems.

MAINTENANCE ENGINEERING CORP.

P. O. BOX 1729 PHONE: 222-2351

HOUSTON, TEXAS 77001

CAUTION

WARNING: KEEP OUT OF THE REACH OF CHILDREN

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eye irritation persists get medical attention. Avoid contamination of food.


PQ is used to control algae, bacteria, and fungi in commercial and industrial water cooling towers. Prior to its use the system is cleaned to remove algal growth, microbiological slime. An initial slug addition of 2.88 to 7.3 fluid ounces PQ per 1000 gallons of water to provide a concentration of one million of Mecoc Microbiocidal PQ based on the total volume of the system is recommended. Repeat initial dosage until the system is clean. Subsequent slug additions of 0.73 to 7.3 fluid ounces PQ per 1000 gallons of water (6 to 60 parts per million PQ) should be employed every 2 to 5 days or as needed. Frequency of addition depends upon the relative amount of bleedoff and the microbiological problem. Slug additions should be made to cooling towers.

Active ingredient.....20.0 percent
Poly(oxyethylene(dimethyliminio)ethylene(dimethyliminio)ethylene dichloride)
Inert ingredient.....80.0 percent
Weight per gallon.....8.69 pounds
Weight of active ingredient per gallon.....1.74 pounds

EPA Registration No. 8249-4

Toxic to fish. "Treated effluent should not be discharged into lakes, streams, ponds, or public water". Use only in aeration tanks.

Destroy when empty.

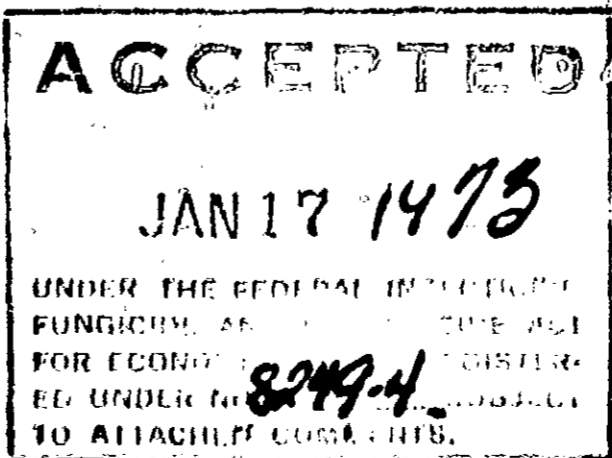

CHEMICALS WITH ENGINEERING SERVICE

