

WOODCARE

COPPER NAPHTHENATE - MARINE TYPE

WOOD PRESERVATIVE

PROTECTS WOOD FROM TERMITES, ROT, MOLD
A WATER REPELLENT, PENETRATING PRIME COAT FOR PAINT

- Penetrating
 - Water Repellent
 - Protects
- Use It On Unpainted
- Lumber
 - Docks
 - Boats
 - Fences
 - Shingles
 - Slat House

260 GREEN

ONE GALLON

ACTIVE INGREDIENTS	CAUTION
INERT INGREDIENTS	KEEP OUT OF REACH OF CHILDREN

EPA 451-140-0000

CARE

- MARINE TYPE

ERVATIVE


RMITES, ROT, MOLD

G PRIME COAT FOR PAINT

EN
ON

CAUTION
 DREAATIF SWALLOWED
 CE REACH OF CHILDREN
 (Small text below)

Guarantee
 your satisfaction with
 this product is our
 first and last concern.
 If you are not
 completely satisfied
 with the product, we
 will refund your money
 or replace the product
 at our expense.

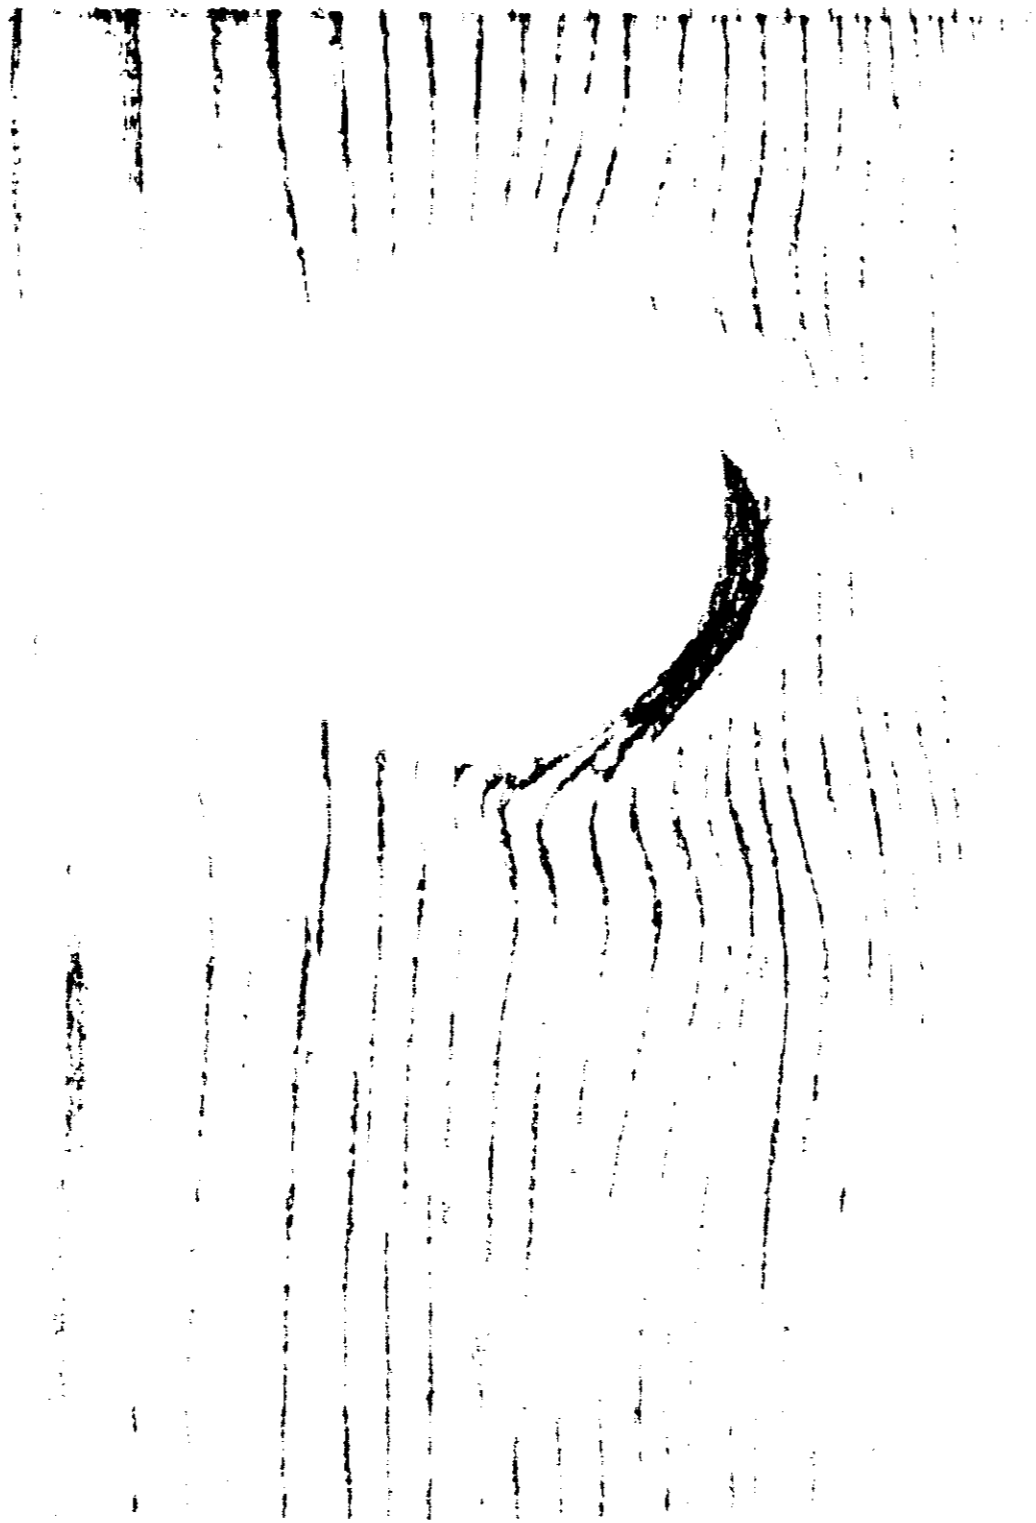

WOODCARE COPPER NAPHTHENATE - MARINE TYPE WOOD PRESERVATIVE

WOODCARE containing Copper Naphthenate is an ideal marine type wood preservative for treating uncoated lumber used in the construction of boats, docks, piers, marinas and other water front structures. It will protect them from salt water, borers and termites, and is water repellent and penetrating to add years to the life of wood. It is also an excellent base for paint after it has dried for at least 48 hours. WOODCARE may also be used on canvas and rope to prolong their lives by making them water repellent by dipping or spraying in the wet.

COVERAGE

For maximum protection treat only about 150 sq. ft. per gallon of wood.

DIRECTIONS

Prepare surface to be treated by having it clean, dry and free of old paint or coatings must be removed so WOODCARE can penetrate. Apply at least 2 coats with brush or spray. Apply succeeding coats before previous coats completely dry. Thoroughly soak end grain of wood. Do not apply when temperature is below 40° F. In new construction, lumber should be treated before it is nailed. Surfaces that are broken or cut after treatment should be treated again. Wood intended for ground contact with the soil should be dipped in WOODCARE for a minimum of 48 hours. Drying time in well ventilated area with warm temperature is only 24 hours. For a colorless wood preservative use WOODCARE containing Pentachlorophenol. NOTE: Do not use steel wool before applications.

CAUTION!

CONTAINS PETROLEUM DISTILLATE

Harmful if swallowed or absorbed through the skin. Causes eye irritation. Do not get in eyes or on clothing. Wash thoroughly after handling. Avoid breathing of vapors or spray mist. Wash hands after each use.

If swallowed or it gets in eyes, CALL PHYSICIAN IMMEDIATELY. Flush eyes with water for at least 15 minutes.

FLAMMABLE. Keep away from heat and open flame. Do not contaminate any body of water by pouring or dumping or disposal of waste.

**USE WITH ADEQUATE VENTILATION
 KEEP OUT OF REACH OF CHILDREN**



ANOTHER FINE PRODUCT MANUFACTURED BY
ATLAS CHEMICAL CO.
 MARK OF QUALITY
 Products from Chemistry for Home and Industry Since 1919